


Material:  
 Standard:PPS  
 Insulator:Polyester,UL 94V-0  
 Contacts:Phosphor Bronze  
 Plating:Sn Over Ni


Electrical Characteristics:  
 Current Rating:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulator Resistance:1000MΩ Min  
 Operating Temperature: -40°C ~ +105°C  
 Max.Processing Temp:230 for 30-60 seconds  
 (260°C for 10 seconds)

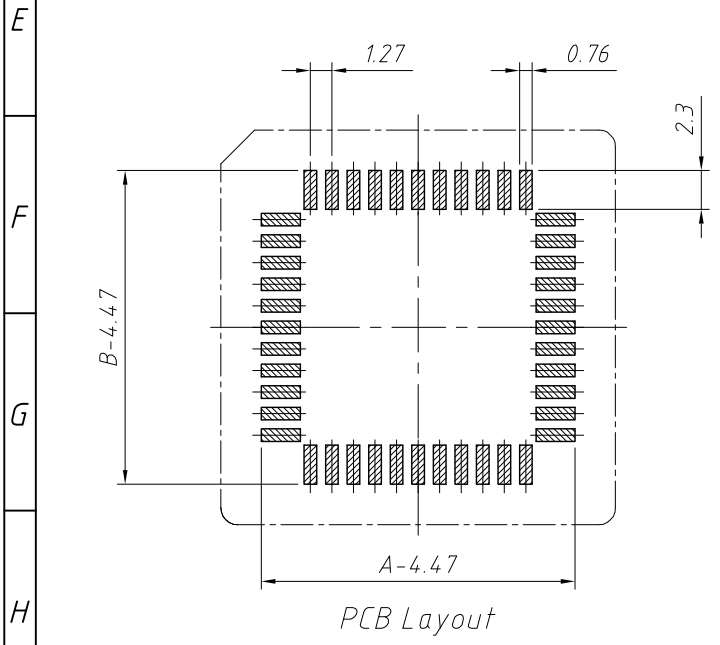

PIN	A	B	C	D	E	F
20	15.60	15.65	5.08	5.08	17.28	9.36
28	18.19	18.19	7.62	7.62	20.87	12.00
32	18.15	20.65	7.62	10.16	22.90	14.40
44	23.27	23.27	12.70	12.70	28.30	16.99
52	25.81	25.81	15.24	15.24	31.65	19.54
68	30.89	30.89	20.32	20.32	38.83	24.62
84	35.97	35.97	25.40	25.40	46.00	29.70

Order Information:

L-KLS1-210-S-XX-A



GENERAL TOLERANCE	PROJECTION		Description:
X. ±0.50	UNITS	mm	Pitch 1.27mm Dip PLCC Socket Connector
.X ±0.25	SCALE	1:1	
.XX ±0.10	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:		KLS P/N: L-KLS1-210-S-XX-A
X. ±5°	Date	2018-03-01	NingBo KLS ELECTRONIC CO.,L TD.
.X ±3°	SHEET	1 OF 1	
.XX ±2°			