


СВЕРХМИНИАТЮРНЫЕ ТУМБЛЕРА СЕРИИ SMTS.



Ordering Information

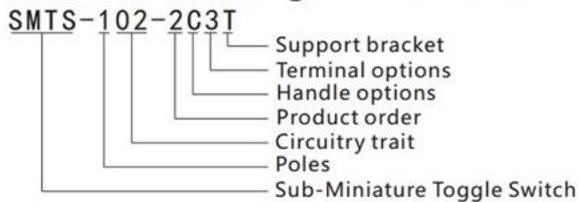


Specification

1. Rating: 3A 125VAC; 1.5A 250VAC
2. Contact Resistance: 20mΩ max
3. Insulation Resistance: 500VDC 1000MΩ min
4. Dielectric Strength: 1000VAC, 1Minute
5. Operating Temperature: -25°C ~ +85°C
6. Electrical Life: 10,000 Cycles


Circuitry trait

| | | | |
|----|----|-----|-----|
| 01 | ON | - | OFF |
| 02 | ON | - | ON |
| 03 | ON | OFF | ON |


Handle options

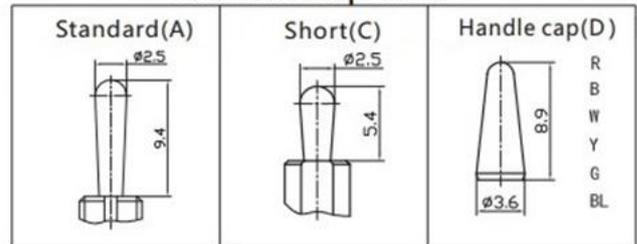


Bushing options

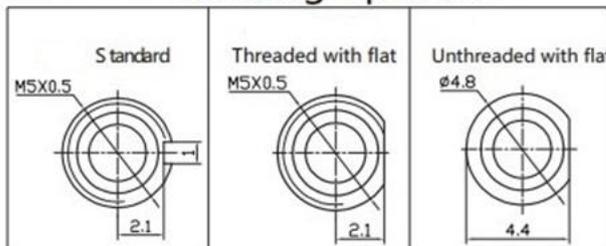

Nameplate

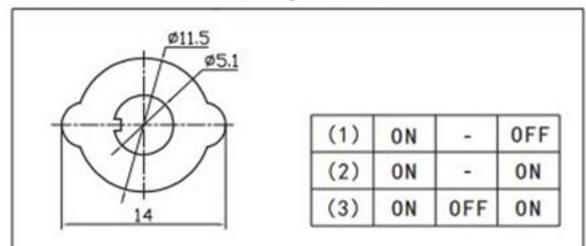

Terminal options

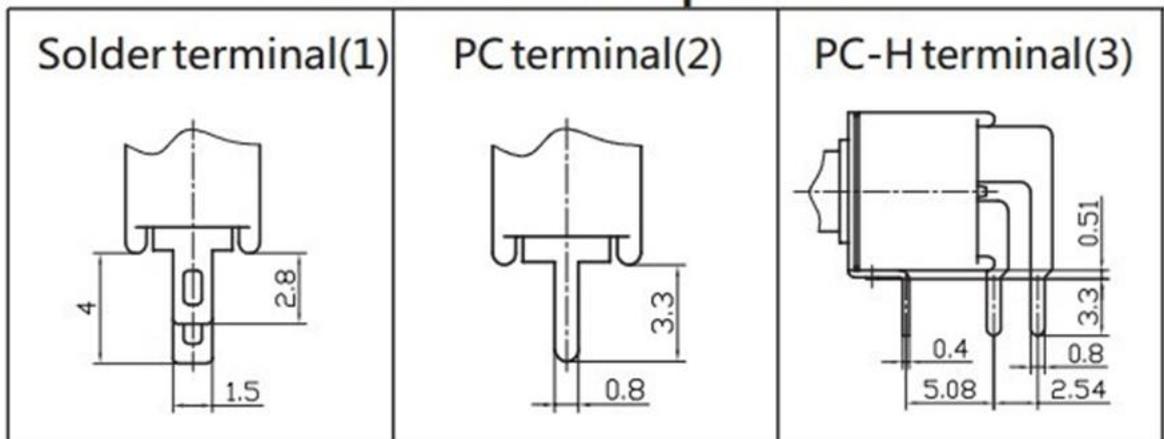

SMTS-102 ON-ON SPDT 3P

