


R13-244 -




Ø 20.2

20A 12V DC
10A 28V DC


UL US 10A 28V DC for A, D
10A 28V DC UL61058 for A, A8, B, B8, C, CB, C8, CB8, D, DB, D8, DB8, G, H, I
UL 15 10A 28V DC UL61058 for A, A8, B, B8, C, CB, C8, CB8, D, DB, D8, DB8, G, H, I

Cut-out Cut-out for X8 ROCKER

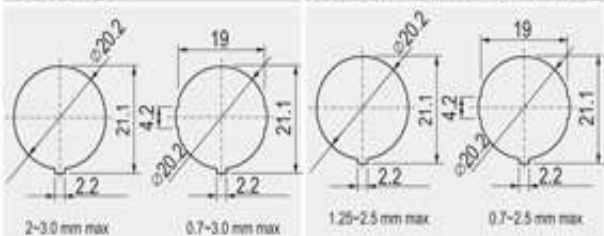

0.7~3.0 mm max 0.7~2.5 mm max

ROCKER



FUNCTION		TERMINAL
A	OFF ON 4P DPST	0 2 .187" SQ
A 8	OFF ON 4P DPST	D B 8
B	OFF ON 4P DPST (NEON)	ON OFF ON 6P DPDT (NEON)
B 8	OFF ON 4P DPST (NEON)	G
C	ON ON 6P DPDT	H
C 8	ON ON 6P DPDT	I
C B	ON ON 6P DPDT (NEON)	
C B 8	ON ON 6P DPDT (NEON)	
D	ON OFF ON 6P DPDT	
D 8	ON OFF ON 6P DPDT	
D B	ON OFF ON 6P DPDT (NEON)	

