





Terminal Layout
脚位图

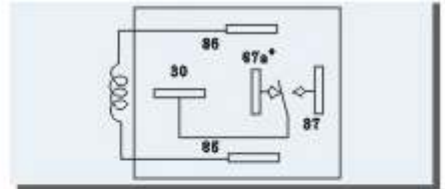

Mounting Holes(mm)
安装尺寸

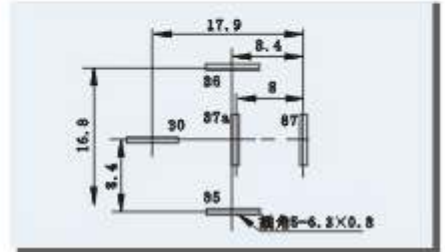

| CLASSIFICATION | | AUTOMOBILE RELAY |
|-------------------------------|--------------------------|--|
| Appearance | | 4141 |
| Outline Dimension(L×W×H) (mm) | | 26×26×24.5 |
| Contact Form | | 1A,1B,1C |
| Contact Resistance | | 100mΩ |
| Coil Voltage | | 5VDC~24VDC |
| Pick-up Voltage | | ≤70% |
| Release Voltage | | ≥10% |
| Coil Power(W) | | 1.6 |
| Contact Rating | | 30A 14VDC |
| Insulation Resistance | | 100MΩ |
| Dielectric Strength | Between Open Contact | 500VAC |
| | Between Coil and Contact | 750VAC |
| Life | Electrical | 1×10 ⁵ |
| | Mechanical | 1×10 ⁷ |
| Temperature Range | | -55~+85℃ |
| Terminal Layout | | |
| Mounting Holes(mm) | | |
| Mounting Form | | QUICK Terminal |
| Weight | | 30g |
| Salty Approval | | |
| Cross-Reference | | P&B:VF4 NAIS:CB ORIGINAL:ORAL ZETTLER:AZ972/973 |