

SPECIFICATION

受 控


1. SCOPE

This specification is applied to the piezo-element.

2. SPECIFICATION

(at 25°C)

| | | |
|---------------------------|---|-------------------------|
| 2.1 Resonant Frequency | : | 2.8 ± 0.3 KHz |
| 2.2 Resonant Resistace | : | 150 Ω max |
| 2.3 Capacitance | : | 130000pF ± 30% at 100Hz |
| 2.4 Input Voltage | : | 30Vp-p max |
| 2.5 Operating Temperature | : | -20~+50°C |
| 2.6 Storage Temperature | : | -20~+60°C |
| 2.7 Wires Length | : | 2-80+5mm |
| 3. DIMENSION | : | as per figure |

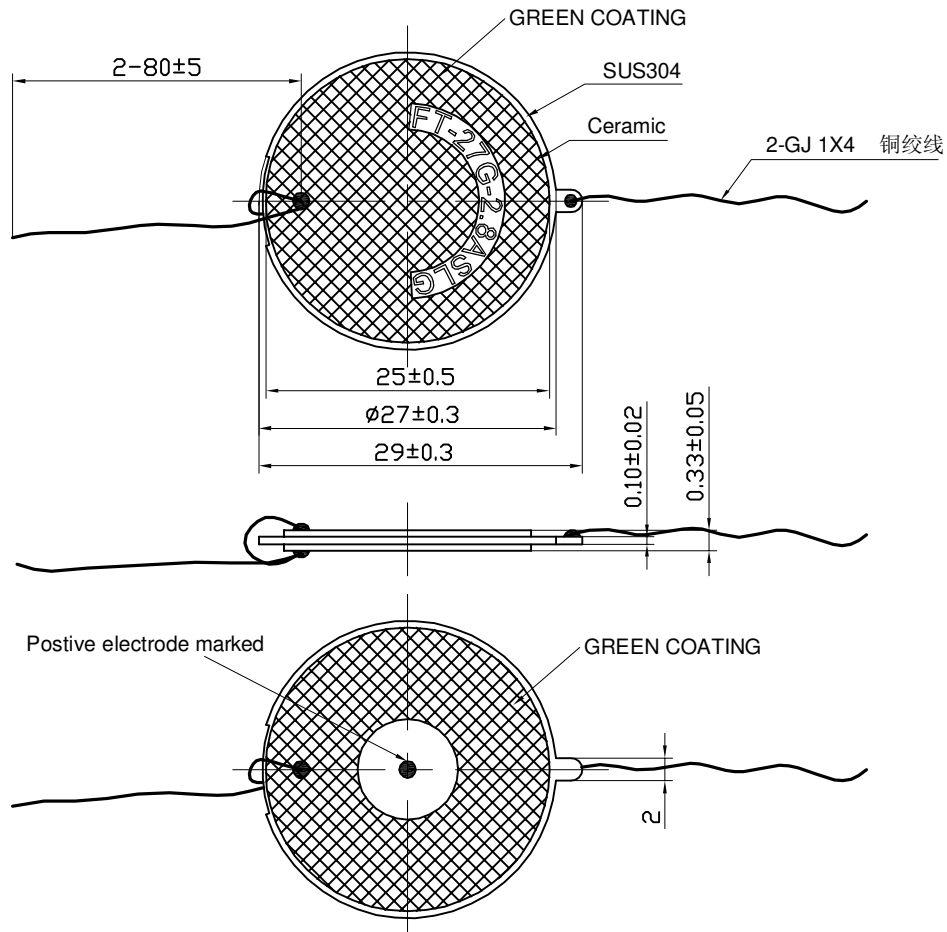


TOLERANCES UNLESS NOTED OTHERWISE

.X ±
.XX ±
.XXX ±

90° FORMED +2°
ANGLES -1°

FIRST ANGLE PROJECTION



| | |
|-----------------|----------|
| DRAWN | 汪逸 |
| DESIGN | |
| CHECKED | |
| APPROVED | 徐锦生 |
| DATE | 12.06.05 |
| CONTRACT NO. | |
| AGENCY APPROVAL | |

| | |
|----------------------|---------------------|
| KEPO MODEL NO. | FT-27G-2.8ASLG-2408 |
| DWG NO. | OEM2408G |
| KEPO CO.,LTD. | |

| | | | |
|-----------------------|-----|-------|--|
| CUSTOMER | | | |
| QUARTZ | | | |
| CUSTOMER NO. | | | |
| VER | 1.3 | SCALE | |
| UNIT | mm | SHEET | |
| TEL:(+86)574-88370330 | | | |
| FAX:(+86)574-88370329 | | | |