


1 2 3 4 5 6 7 8

A

A

B

B

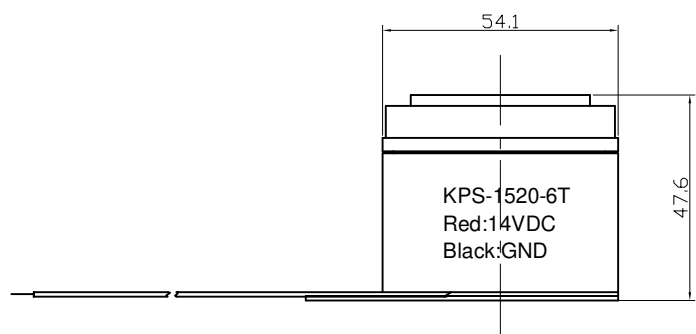

SPECIFICATION


- 1. Rated Voltage14VDC
- 2. Operating Voltage6~16VDC
- 3. Max. Rated Current250mA/14VDC
- 4. Min. Sound Pressure Level.....98dB/100cm/14VDC
- 5. Tone Nature6Tone
- 6. Case MaterialABS
- 7. Operating Temperature-20~+60°C
- 8. Store Temperature-30~+70°C
- 9. Weight80g

C

C

D

D

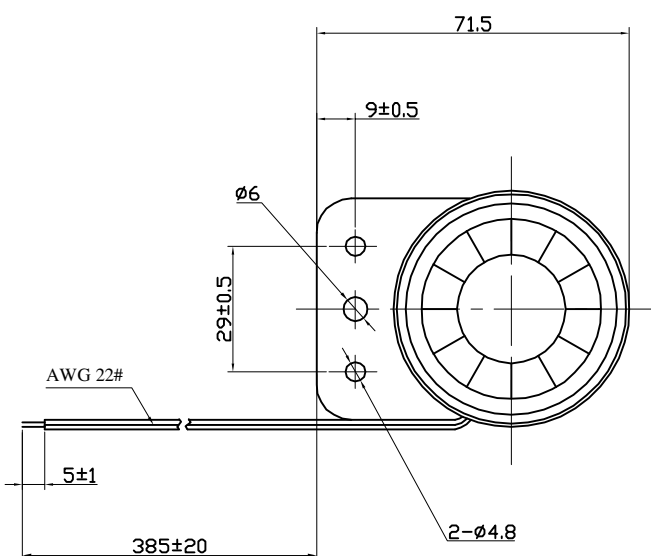

E

E

F

F

1 2 3 4 5 6 7 8

				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
				Electronic siren	
				KPS-1520-6T	
No.	DESCRIPTION	APPROVED	DATE		
TOLERANCES UNLESS NOTED OTHERWISE X ± .XX ± .XXX ± 90° FORMED +2° ANGLES -1°		APPROVALS	DATE	UNIT	DWG NO.
FIRST ANGLE PROJECTION		DRAWN		mm	KP3.842.494
		CHECKED		SCALE	SHEET
		APPROVED	07.04.06	NOT TO SCALE	VER 1.1