
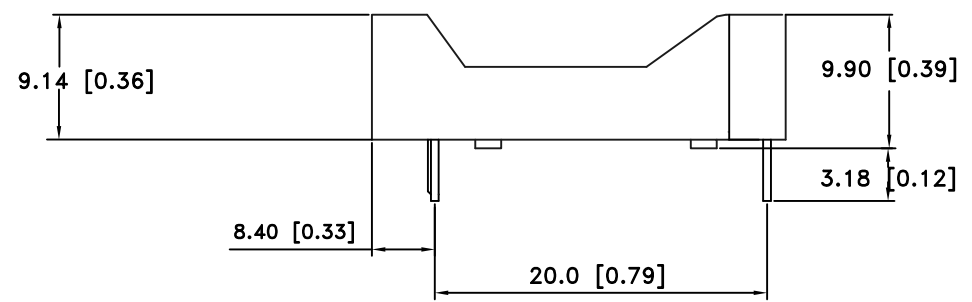



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|---|------|------|-----|
| 8/04/07 | B | REDRAWN ADDED "ROHS COMPLIANT" | T.B. | B.S. | |
| 12/09/11 | C | UPDATED NOTES | T.B. | B.S. | |
| 02/03/12 | D | REMOVED "SOLDER DIPPED TAILS" FROM NOTES | T.B. | B.S. | |
| 03/30/12 | E | Dim. 1.17 was 1.02 | T.B. | B.S. | |

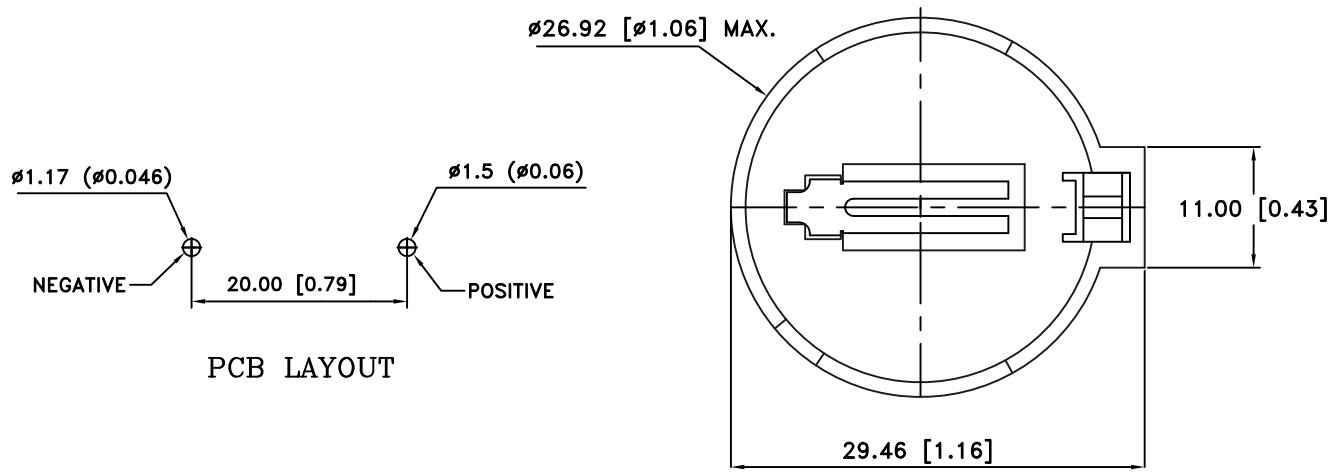

NOTES:
MATERIAL:
BODY: FR-NYLON WITH 15% GLASS FILLED,
UL94V-0, UL FILE NO. E176060(S)
CONTACT: PHOSPHOR BRONZE, NICKEL PLATED
OVERALL
APPLICATION FOR 3V LITHIUM BATTERY:
INSULATOR RESISTANCE: 5000MEGA Ω MIN.
OPPERATION TEMPERATURE: -55°C TO +105°C
DURABILITY: 50 CYCLES MIN.
CONTACT RESISTANCE: 30MILLI Ω MAX.
ROHS COMPLIANT

| | | | |
|--------------------------------|---|---------------------------|------------------|
| Tolerance (Except as noted) |  Memory protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | Scale | Drawn By T.S. |
| | | 4=1 | Approved By T.B. |
| decimal $\pm .5 (.020)$ | Title BATTERY HOLDER FOR CR2450 | | |
| Fractional $\pm .8 (.030)$ | Date 03/30/12 | Drawing Number BS-2450 | |
| Angular $\pm 3^\circ$ | | | |