


GP Batteries

Data Sheet

Model No.: GP393

Description	: Silver Oxide High Drain Button Cell
Nominal Voltage	: 1.55Volts
Nominal Dimensions	: Ø7.90mm×5.40mm
Application	: Watch (with alarm and lamp), hearing aid, electronic toy, etc.
Average Weight	: 1.1g
Date Code	: Unless otherwise specified, each cell Will carry a numeric year code and an alphabetical month code.
Shelf Life	: Not less than 90% of the service capacity within first year. , not less than 85% of the service capacity with third year storage at 20 ± 2 °C 45-75 %RH.
Close Circuit Voltage	: 1.30 Volts (min.)(load resistor 100Ω at 20 ± 2 °C for 0.1 to 2 seconds)
Nominal Service Life	: 700hrs (at 15kΩ load) (to 1.2V at 20 ± 2 °C) 190days (at 100kΩ load)
Average Service Capacity	: 70mAh(at 10kΩ load) (to 1.2V at 20 ± 2 °C)


Typical Discharge characteristics at 20 ± 2°C

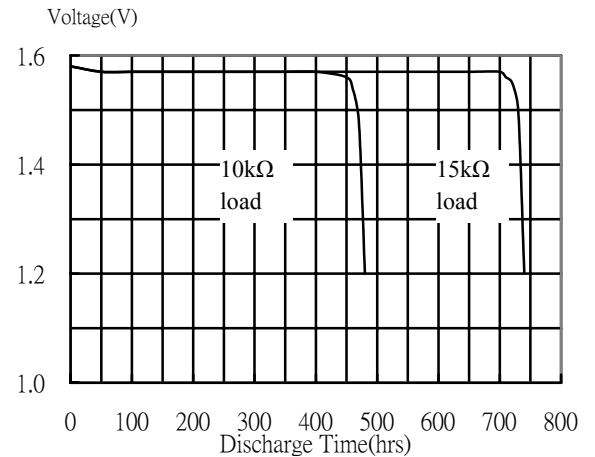

Cross References:

IEC JIS Eveready Varta Duracell Panasonic Sony

SR48 SR48 393 V393 D393 SP39 SR48W

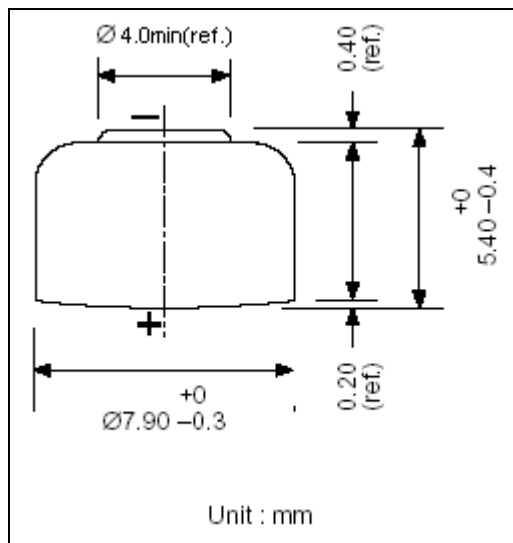

* The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

