




这类晶体的体积小, 塑壳封装, 广泛应用电脑, 自动控制系统等等。

This type of crystal is miniature and plastic package. It's widely used in Communication equipment, Computer, GPS, automatic control system etc.

技术参数 SPECIFICATIONS

频率范围	FREQUENCY RANGE	30KHz~200KHz
振荡模式	VIBRATION MODE	FUNDAMENTAL
负载电容	LOAD CAPACITANCE	9pF~12.5pF
激励电平	DRIVE LEVEL	1.0±0.2μW
频率偏差	FREQUENCY TOLERANCE	GRADE±20ppm(at25℃)
谐振电阻	SERIES RESISTANCE	50KΩ max
品质因数	Q FACTOR	70,000Typ. 40,000min
峰值温度	PARABOLIC TEMPERATURE	+25℃ ±5℃
二次温度曲线系数	TWO DIMENSIONAL TEMPERATURE CONSTANT	-0.4×10 ⁻⁶ /℃ ²
工作温度范围	OPERATING TEMPERATURE RANGE	-40℃~+85℃
储存温度范围	STORAGE TEMPERATURE RANGE	-55℃~+125℃
静电容	SHUNT CAPACITANCE	2pF Typ

外观尺寸 DIMENSION(UNIT:mm)

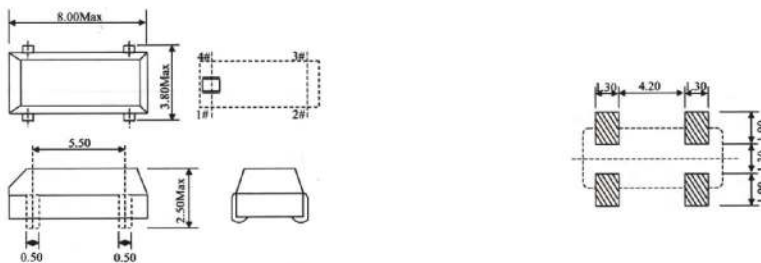

包装 PACKING(UNIT:MM)

