

DBL 2044

ELECTRICAL CHARACTERISTICS (Ta=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Dissipation Current	i_1, i_2, i_7, i_8		—	—	60	mA
Output Saturatiuon Voltage	V_1 (sat) V_2 (sat) V_7 (sat) V_8 (sat)	$V_9 = 12V, i_6 = 5mA$ $i_0 = 60mA$	0	0.25	0.7	V
Input "H" Level Threshold Voltage	V_{TH}		—	—	3.0	V
Input "L" Level Threshold Voltage	V_{TL}		0.8	—	—	V
Output Leak Current	i_1 (leak) i_2 (leak) i_7 (leak) i_8 (leak)	$T_a \leq 70^\circ C$	—	—	50	μA

Note) Current Direction :
 Current flowing into IC : PLUS (No sign)
 Current flowing out of IC : MINUS (-)


TRUTH TABLE

Input		Output			
PIN 3	PIN 4	PIN 1	PIN 2	PIN 7	PIN 8
L	L	H	Z	Z	Z
H	L	Z	H	Z	Z
L	H	Z	Z	H	Z
H	H	Z	Z	Z	H

Note) Z : High Impedance
 Input Threshold Voltage : $V_{TL} = 0.8V, V_{TH} = 3V$

DBL 2044

□ TEST CIRCUIT

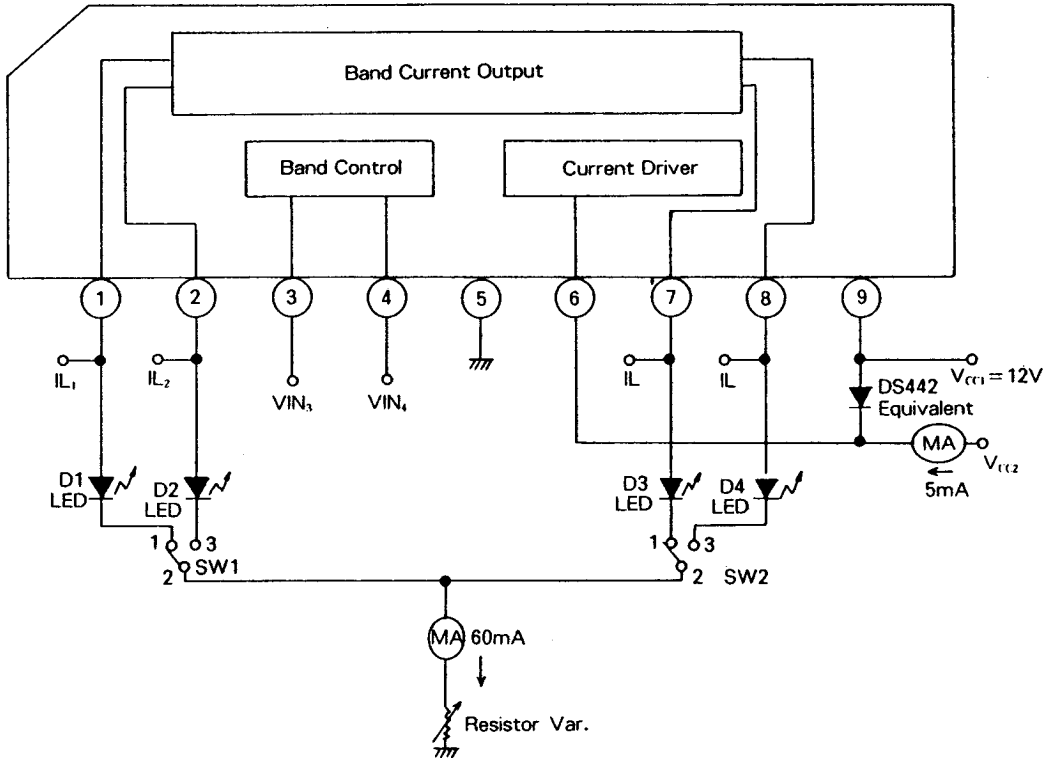


□ SWITCH OPERATION

Characteristics	Switch	SW1	SW2	VIN3	VIN4	Test Point
V_1 (sat)		1	Open	L	L	V_{9-1}
I_2, I_7, I_8 (leak)		Open	Open	L	L	I_{L2}, I_{L7}, I_{L8}
V_2 (sat)		3	Open	H	L	V_{9-2}
I_1, I_7, I_8 (leak)		Open	Open	H	L	I_{L7}, I_{L7}, I_{L8}
V_7 (sat)		Open	1	L	H	V_{9-7}
I_1, I_2, I_8 (leak)		Open	Open	L	H	I_{L1}, I_{L2}, I_{L8}
V_8 (sat)		Open	3	H	H	V_{9-7}
I_1, I_2, I_7 (leak)		Open	Open	H	H	I_{L1}, I_{L2}, I_{L7}
V_{TH}		1	1	L	H-L	V_4 (D1 LED ON)
V_{TL}		1	1	L	L-H	V_4 (D3 LED ON)

DBL 2044



APPLICATION CIRCUIT

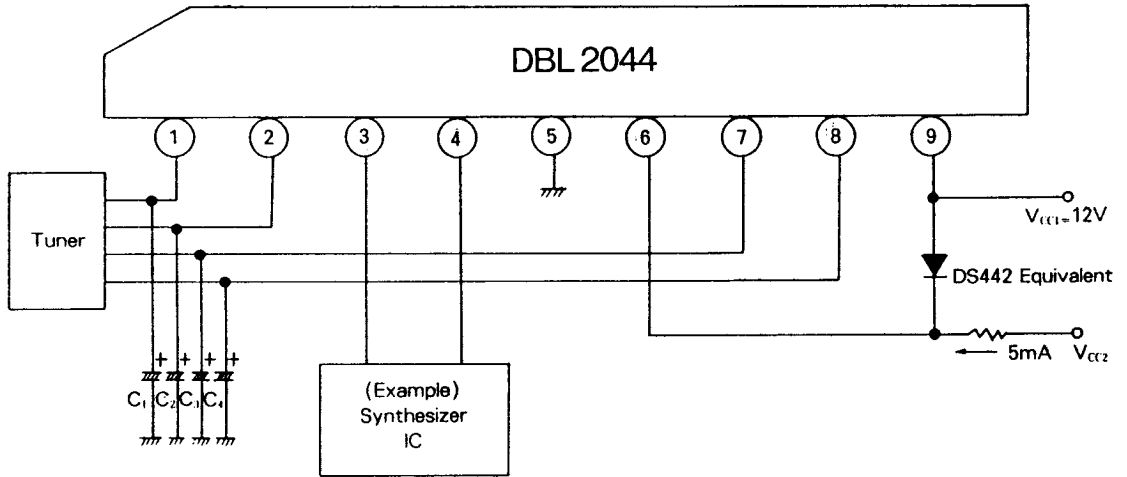

Note) Proper cares in using the IC

1. When using a capacitive load, connect a diode across pins 6 and 9 as shown above.
2. The value of load capacitors C_1, C_2, C_3, C_4 must not exceed 22 μ F.

TYPICAL PERFORMANCE CHARACTERISTICS

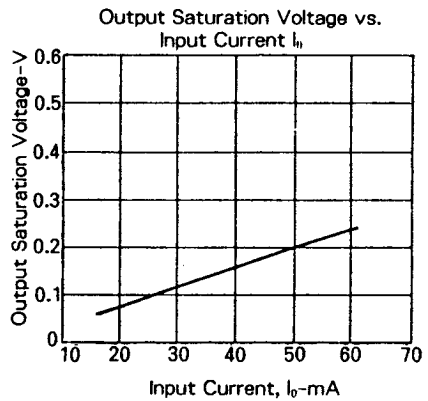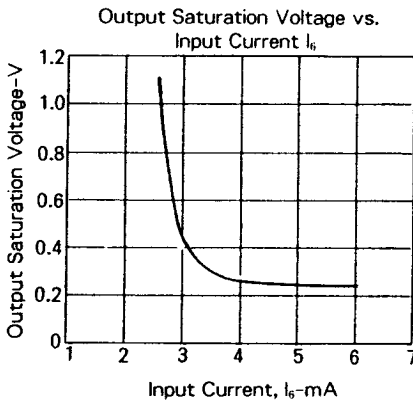

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.