

Features


- 70mΩ (MSOP-8) High Side MOSFET
- Wide Supply Voltage Range: 2.7V to 5.5V
- Current-Limit and Short-Circuit Protections
- Over-Temperature Protection
- Fault Indication Output
- Enable Input
- UL Approved-File No. E328191
- Nemko IEC 60950-1: 2005 (2nd Edition) and EN 60950-1: 2006 CB_Scheme Certified, No.52719
- TUV IEC 60950-1: 2005(2nd Edition) and EN 60950-1: 2006 Certified, No.44 780 09 377124
- Lead Free and Green Devices Available (RoHS Compliant)

General Description

The APL3510/1 series of power switches are designed for USB applications. The 70mΩ N-channel MOSFET power switch satisfies the voltage drop requirements of USB specification.

The protection features include current-limit protection, short-circuit protection, and over-temperature protection. The device limits the output current at current limit threshold level. When V_{OUT} drops below $V_{IN}-1V$, the devices limit the current to a lower and safe level. The over-temperature protection limits the junction temperature below 140°C in case of short circuit or over load conditions. Other features include a deglitched OCB output to indicate the fault condition and an enable input to enable or disable the device.







Simplified Application Circuit

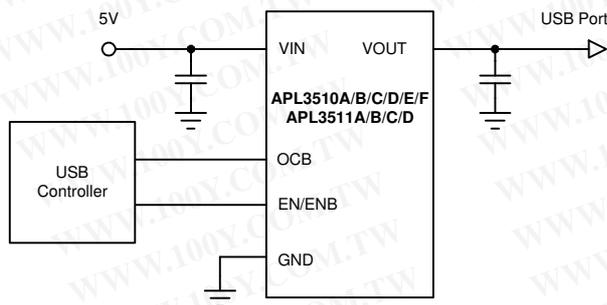

Applications


- Notebook and Desktop Computers
- USB Ports
- High-Side Power Protection Switches

Pin Configurations

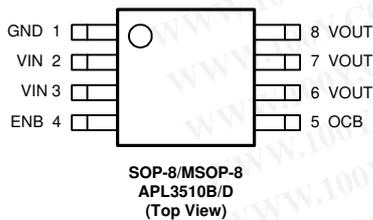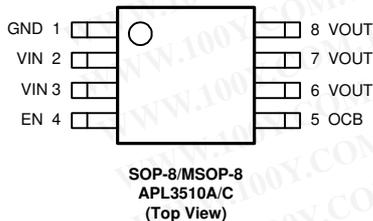

ANPEC reserves the right to make changes to improve reliability or manufacturability without notice, and advise customers to obtain the latest version of relevant information to verify before placing orders.

Ordering and Marking Information
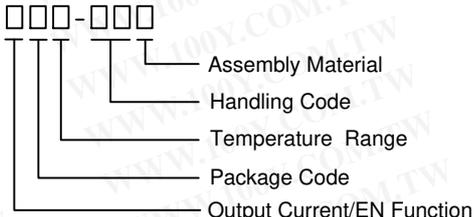
| | | | | | | |
|--------------------|---|---|---------------|---|----|-------------------|
| APL3510 APL3511 |  | Package Code K : SOP-8 X : MSOP-8 B : SOT-23-5 Operating Ambient Temperature Range I : -40 to 85 °C Handling Code TR : Tape & Reel Output Current/EN Function A : 2A/Active High B : 2A/Active Low C : 1A/Active High D : 1A/Active Low E : 0.3A/Active High F : 0.3A/Active Low Assembly Material G : Halogen and Lead Free Device | | | | |
| APL3510A K: | <table border="1"> <tr> <td>APL3510A</td> <td>XXXXX</td> </tr> <tr> <td>•</td> <td></td> </tr> </table> | APL3510A | XXXXX | • | | XXXXX - Date Code |
| APL3510A | XXXXX | | | | | |
| • | | | | | | |
| APL3510A X: | <table border="1"> <tr> <td>L510A</td> <td>XXX</td> </tr> <tr> <td>•</td> <td>XX</td> </tr> </table> | L510A | XXX | • | XX | XXXXX - Date Code |
| L510A | XXX | | | | | |
| • | XX | | | | | |
| APL3510A B: | <table border="1"> <tr> <td>L0AX</td> </tr> </table> | L0AX | X - Date Code | | | |
| L0AX | | | | | | |
| APL3511A B: | <table border="1"> <tr> <td>L1AX</td> </tr> </table> | L1AX | X - Date Code | | | |
| L1AX | | | | | | |

Note : ANPEC lead-free products contain molding compounds/die attach materials and 100% matte tin plate termination finish; which are fully compliant with RoHS. ANPEC lead-free products meet or exceed the lead-free requirements of IPC/JEDEC J-STD-020D for MSL classification at lead-free peak reflow temperature. ANPEC defines "Green" to mean lead-free (RoHS compliant) and halogen free (Br or Cl does not exceed 900ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500ppm by weight).

Absolute Maximum Ratings (Note 1)

| Symbol | Parameter | Rating | Unit |
|-------------------|--|-----------|------|
| V_{IN} | VIN Input Voltage (VIN to GND) | -0.3 ~ 7 | V |
| V_{OUT} | VOUT to GND Voltage | -0.3 ~ 7 | V |
| V_{ENB}, V_{EN} | EN, ENB to GND Voltage | -0.3 ~ 7 | V |
| V_{OCB} | OCB to GND Voltage | -0.3 ~ 7 | V |
| T_J | Maximum Junction Temperature | 150 | °C |
| T_{STG} | Storage Temperature | -65 ~ 150 | °C |
| T_{SDR} | Maximum Lead Soldering Temperature, 10 Seconds | 260 | °C |

Note 1: Absolute Maximum Ratings are those values beyond which the life of a device may be impaired. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Thermal Characteristics

| Symbol | Parameter | Typical Value | Unit |
|---------------|--|---|------|
| θ_{JA} | Junction-to-Ambient Resistance in Free Air ^(Note 2) | SOP-8 160 MSOP-8 160 SOT-23-5 235 | °C/W |

Note 2 : θ_{JA} is measured with the component mounted on a high effective thermal conductivity test board in free air.

Recommended Operating Conditions (Note 3)

| Symbol | Parameter | Range | Unit |
|-----------|---|-----------|------|
| V_{IN} | VIN Input Voltage | 2.7 ~ 5.5 | V |
| I_{OUT} | OUT Output Current (APL3510A/B, APL3511A/B) | 0 ~ 2 | A |
| | OUT Output Current (APL3510C/D, APL3511C/D) | 0 ~ 1 | |
| | OUT Output Current (APL3510E/F) | 0 ~ 0.3 | |
| T_A | Ambient Temperature | -40 ~ 85 | °C |
| T_J | Junction Temperature | -40 ~ 125 | °C |

Note 3 : Refer to the typical application circuit

Electrical Characteristics

Unless otherwise specified, these specifications apply over $V_{IN}=5V$, $V_{EN}=5V$ or $V_{ENB}=0V$ and $T_A=-40 \sim 85^\circ C$. Typical values are at $T_A=25^\circ C$.

| Symbol | Parameter | Test Conditions | APL3510/1 | | | Unit | |
|--|------------------------------|--|------------------|------|------|---------|------------|
| | | | Min. | Typ. | Max. | | |
| SUPPLY CURRENT | | | | | | | |
| | VIN Supply Current | No load, $V_{EN}=0V$ or $V_{ENB}=5V$ | - | - | 1 | μA | |
| | | No load, $V_{EN}=5V$ or $V_{ENB}=0V$ | - | 65 | 100 | μA | |
| | Leakage Current | $V_{OUT}=GND$, $V_{EN}=0V$ or $V_{ENB}=5V$ | - | - | 1 | μA | |
| | Reverse Leakage Current | $V_{IN}=GND$, $V_{OUT}=5V$, $V_{EN}=0V$ or $V_{ENB}=5V$ | - | - | 1 | μA | |
| POWER SWITCH | | | | | | | |
| $R_{DS(ON)}$ | Power Switch On Resistance | $I_{OUT}=1.5A$, $T_A=25^\circ C$ | SOP-8 Package | - | 80 | 90 | m Ω |
| | | | SOT-23-5 Package | - | 75 | 90 | |
| | | | MSOP-8 Package | - | 70 | 90 | |
| UNDER-VOLTAGE LOCKOUT (UVLO) | | | | | | | |
| | VIN UVLO Threshold Voltage | V_{IN} rising, $T_A=-40 \sim 85^\circ C$ | 1.7 | - | 2.65 | V | |
| | VIN UVLO Hysteresis | | - | 0.2 | - | V | |
| CURRENT-LIMIT AND SHORT-CIRCUIT PROTECTIONS | | | | | | | |
| I_{LIM} | Current Limit Threshold | APL3510A/B, APL3511A/B, $V_{IN}=2.7V$ to $5.5V$, $T_A=-40 \sim 85^\circ C$ | 2.1 | 2.5 | 2.9 | A | |
| | | APL3510C/D, APL3511C/D, $V_{IN}=2.7V$ to $5.5V$, $T_A=-40 \sim 85^\circ C$ | 1.1 | 1.5 | 1.9 | A | |
| | | APL3510E/F, $V_{IN}=2.7V$ to $5.5V$, $T_A=-40 \sim 85^\circ C$ | 0.35 | - | 0.7 | A | |
| I_{SHORT} | Short-Circuit Output Current | APL3510A/B, APL3511A/B, $V_{IN}=2.7V$ to $5.5V$ | - | 0.8 | - | A | |
| | | APL3510C/D, APL3511C/D, $V_{IN}=2.7V$ to $5.5V$ | - | 0.8 | - | A | |
| | | APL3510E/F, $V_{IN}=2.7V$ to $5.5V$ | 0.35 | - | 0.7 | A | |

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Electrical Characteristics (Cont.)


Unless otherwise specified, these specifications apply over $V_{IN}=5V$, $V_{EN}=5V$ or $V_{ENB}=0V$ and $T_A = -40 \sim 85^\circ C$. Typical values are at $T_A=25^\circ C$.

| Symbol | Parameter | Test Conditions | APL3510/1 | | | Unit |
|--|-----------------------------|--|-----------|------|------|------------|
| | | | Min. | Typ. | Max. | |
| OCB OUTPUT PIN | | | | | | |
| | OCB Output Low Voltage | $I_{OCB}=5mA$ | - | 0.2 | 0.4 | V |
| | OCB Leakage Current | $V_{OCB}=5V$ | - | - | 1 | μA |
| $t_{D(OCB)}$ | OCB Deglitch Time | OCB assertion, $T_A = -40 \sim 85^\circ C$ | 5 | 12 | 20 | ms |
| EN OR ENB INPUT PIN | | | | | | |
| V_{IH} | Input Logic HIGH | $V_{IN}=2.7V$ to $5V$ | 2 | - | - | V |
| V_{IL} | Input Logic LOW | $V_{IN}=2.7V$ to $5V$ | - | - | 0.8 | V |
| | Input Current | | - | - | 1 | μA |
| | VOUT Discharge Resistance | $V_{EN}=0V$ or $V_{ENB}=5V$ | - | 150 | - | Ω |
| $t_{D(ON)}$ | Turn On Delay Time | | - | 30 | - | μs |
| $t_{D(OFF)}$ | Turn Off Delay Time | | - | 30 | - | μs |
| t_{SS} | Soft-Start Time | No load, $C_{OUT}=1\mu F$, $V_{IN}=5V$ | - | 400 | - | μs |
| OVER-TEMPERATURE PROTECTION (OTP) | | | | | | |
| T_{OTP} | Over-Temperature Threshold | T_J rising | - | 140 | - | $^\circ C$ |
| | Over-Temperature Hysteresis | | - | 20 | - | $^\circ C$ |


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Typical Operating Characteristics


Switch On Resistance vs. Junction Temperature

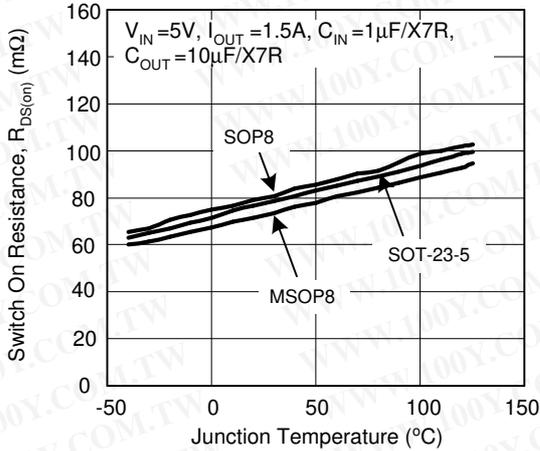


Switch On Resistance vs. Input Voltage

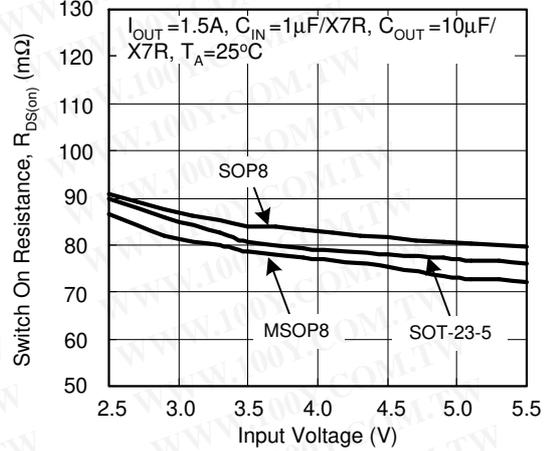


Supply Current vs. Junction Temperature

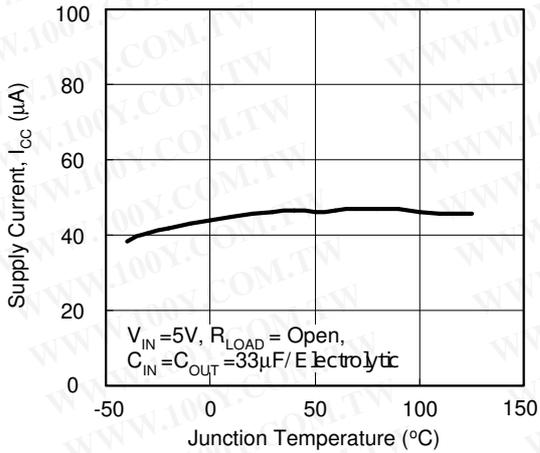


Supply Current vs. Input Voltage

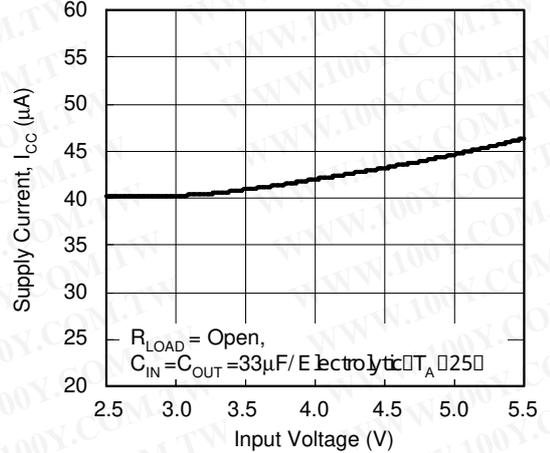







Current Limit Threshold vs. Junction Temperature

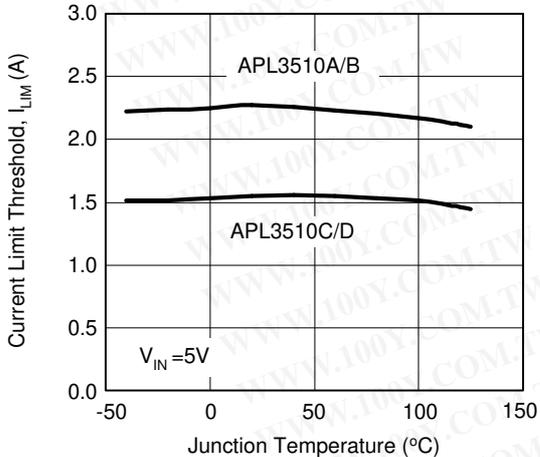







Current Limit Threshold vs. Input Voltage

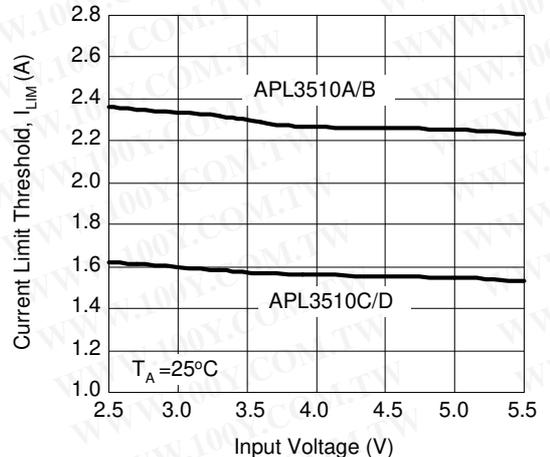



Typical Operating Characteristics (Cont.)

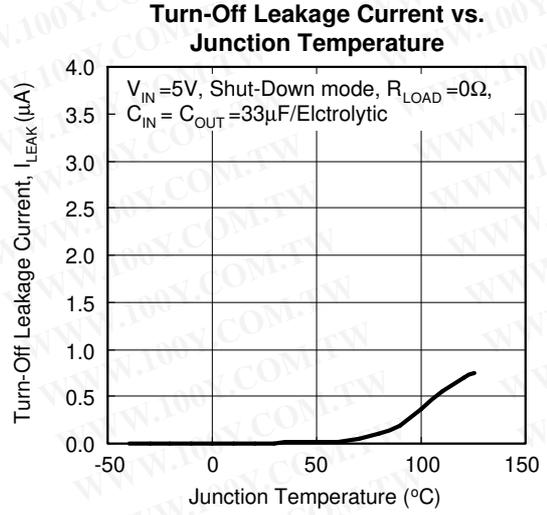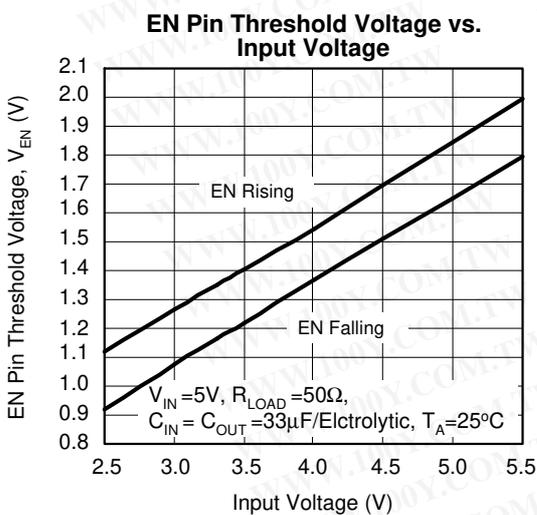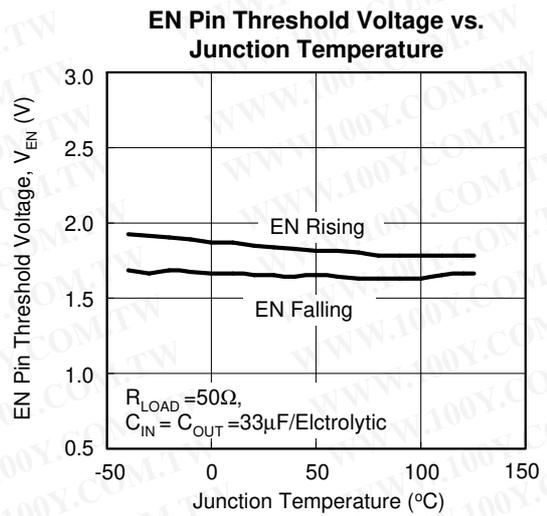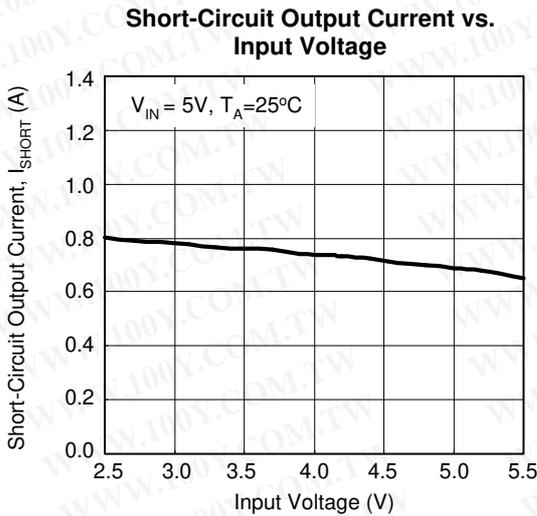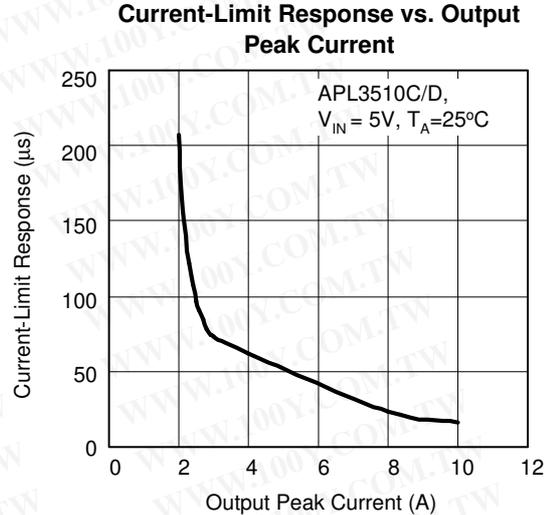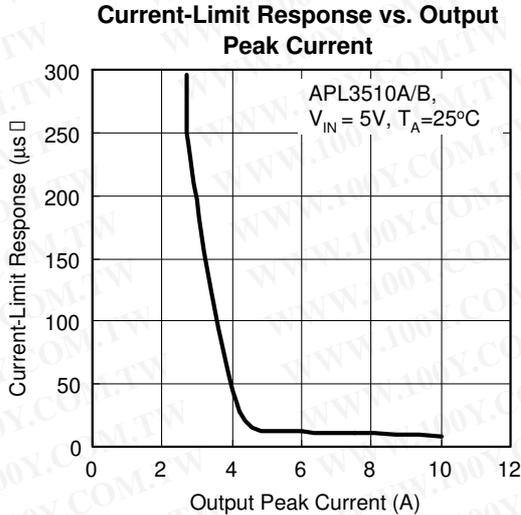

Typical Operating Characteristics (Cont.)

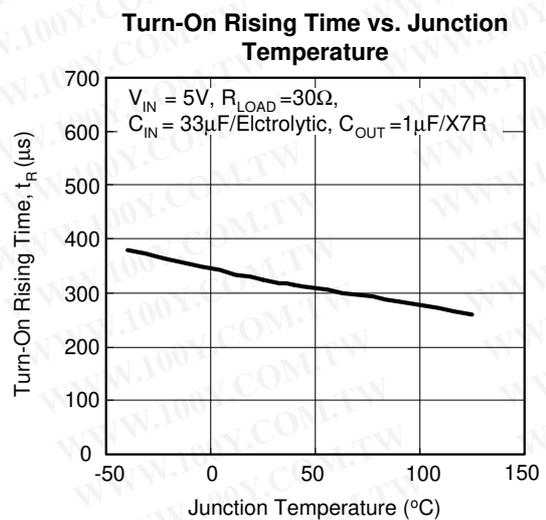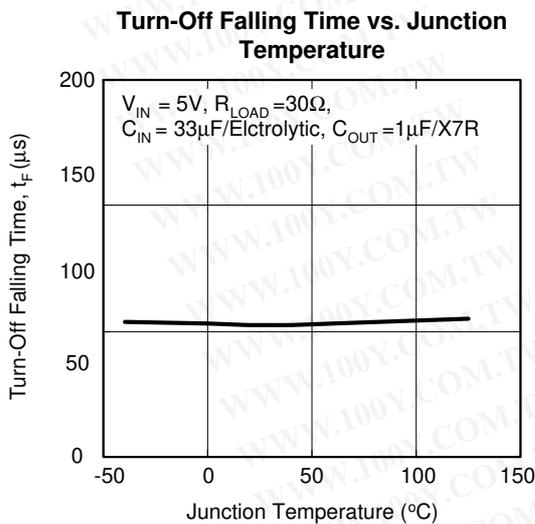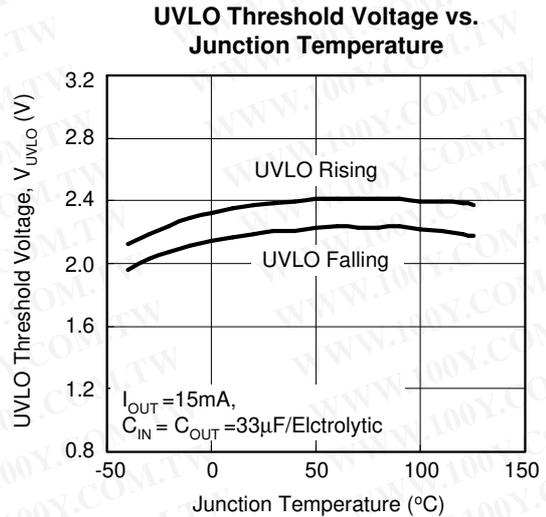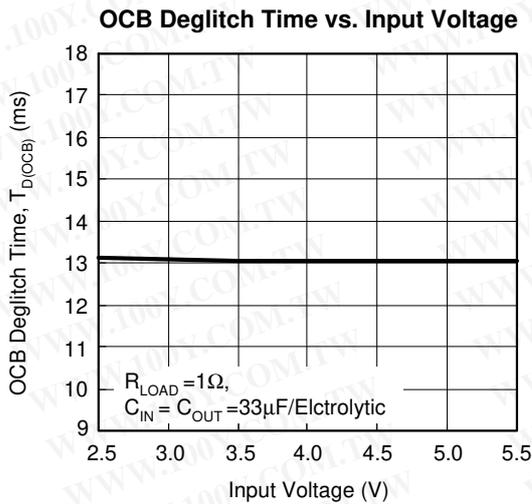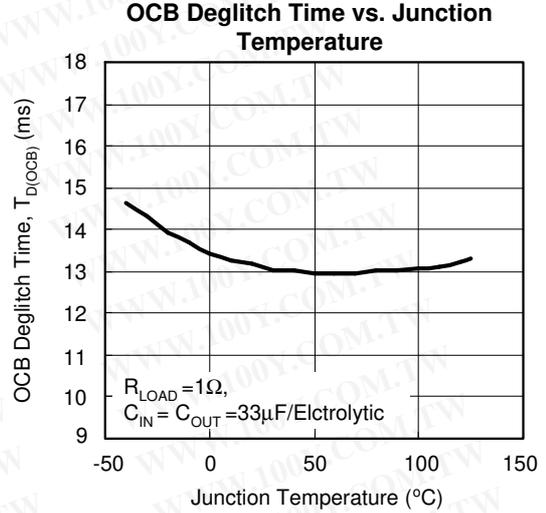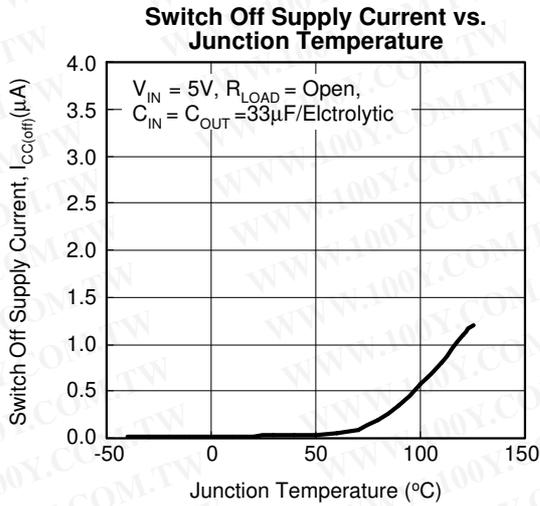

Typical Operating Characteristics (Cont.)

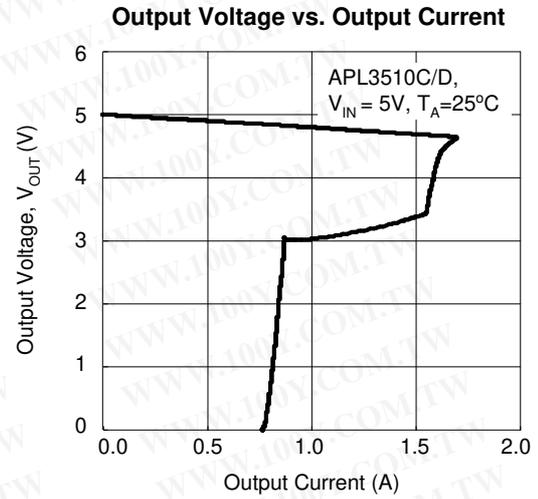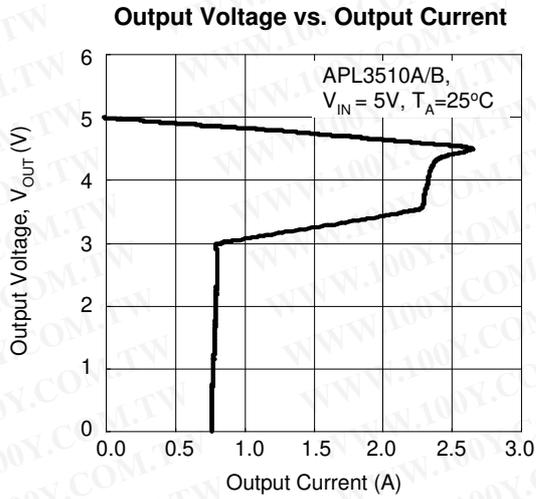


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Operating Waveforms


The test condition is $V_{IN}=5V$, $T_A=25^{\circ}C$ unless otherwise specified.

Turn On Response

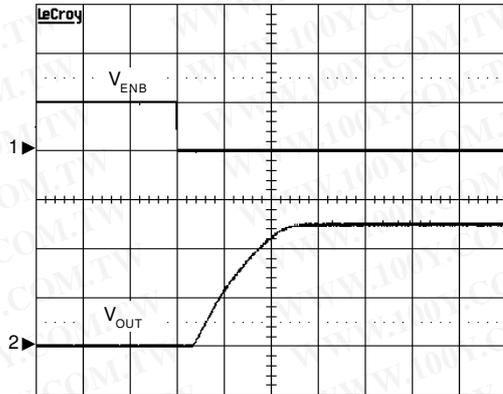


$V_{IN}=5V$, $R_{LOAD}=30\Omega$, $C_{IN}=33\mu F$ /Electrolytic,
 $C_{OUT}=1\mu F$ /Electrolytic
 CH1: V_{ENB} , 5V/Div, DC
 CH2: V_{OUT} , 2V/Div, DC
 TIME: 200 μs /Div

Turn Off Response

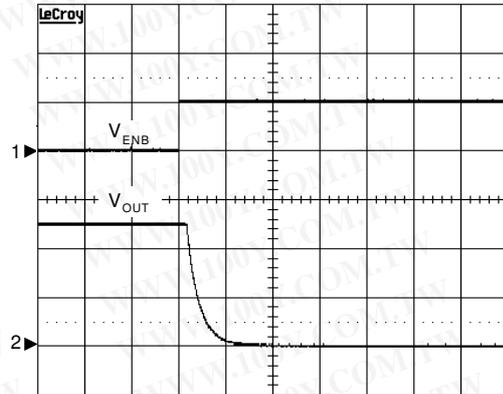


$V_{IN}=5V$, $R_{LOAD}=30\Omega$, $C_{IN}=33\mu F$ /Electrolytic,
 $C_{OUT}=1\mu F$ /Electrolytic
 CH1: V_{ENB} , 5V/Div, DC
 CH2: V_{OUT} , 2V/Div, DC
 TIME: 100 μs /Div

UVLO at Rising

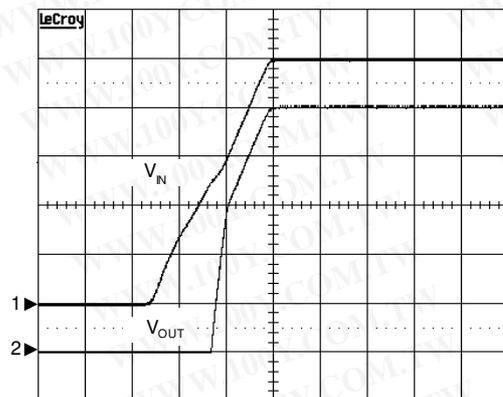

$V_{IN}=5V$, $R_{LOAD}=30\Omega$, $C_{IN}=33\mu F$ /Electrolytic,
 $C_{OUT}=1\mu F$ /Electrolytic
 CH1: V_{IN} , 1V/Div, DC
 CH2: V_{OUT} , 1V/Div, DC
 TIME: 2ms/Div

UVLO at Falling

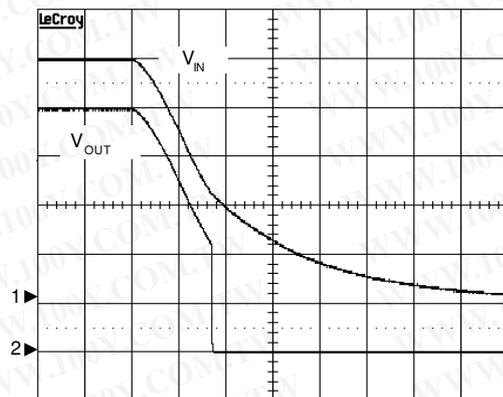


$V_{IN}=5V$, $R_{LOAD}=30\Omega$, $C_{IN}=33\mu F$ /Electrolytic,
 $C_{OUT}=1\mu F$ /Electrolytic
 CH1: V_{IN} , 1V/Div, DC
 CH2: V_{OUT} , 1V/Div, DC
 TIME: 5ms/Div

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Operating Waveforms (Cont.)

The test condition is $V_{IN}=5V$, $T_A=25^\circ C$ unless otherwise specified.


OCB Response During Short Circuit

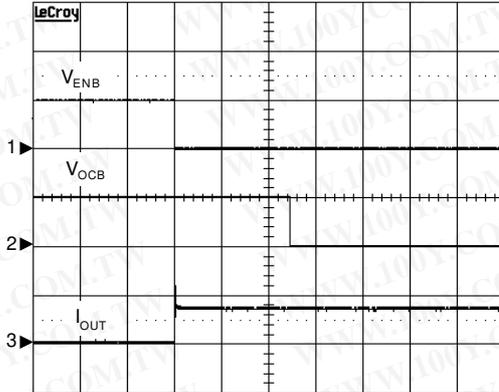

$V_{IN}=5V$, $R_{LOAD}=0\Omega$, $C_{IN}=C_{OUT}=33\mu F$ /
Electrolytic

CH1: V_{ENB} , 5V/Div, DC
CH2: V_{OCB} , 5V/Div, DC
CH3: I_{OUT} , 1A/Div, DC
TIME: 5ms/Div


OCB Response During Over Load

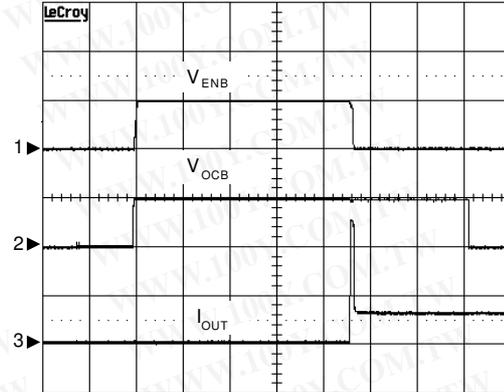

$V_{IN}=5V$, $R_{LOAD}=2\Omega$, $C_{IN}=C_{OUT}=33\mu F$ /
Electrolytic

CH1: V_{ENB} , 5V/Div, DC
CH2: V_{OCB} , 5V/Div, DC
CH3: I_{OUT} , 1A/Div, DC
TIME: 5ms/Div


OCB Response with Ramped Load

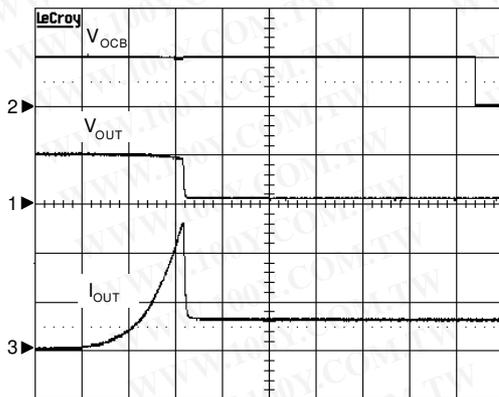

$V_{IN}=5V$, $C_{IN}=C_{OUT}=33\mu F$ /Electrolytic

CH1: V_{OUT} , 5V/Div, DC
CH2: V_{OCB} , 5V/Div, DC
CH3: I_{OUT} , 1A/Div, DC
TIME: 2ms/Div

Load-Transient Response

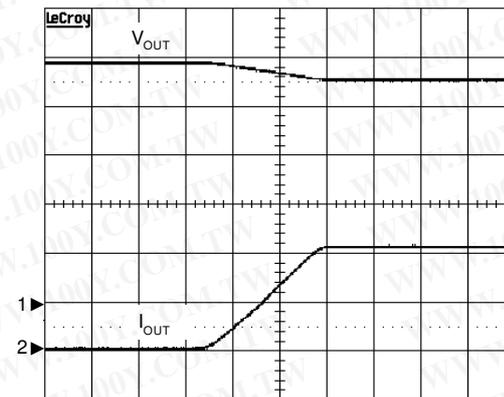


$V_{IN}=5V$, $R_{LOAD}=1k\Omega$ to 2.2Ω , $C_{IN}=C_{OUT}=33\mu F$ /
Electrolytic

CH1: V_{OUT} , 1V/Div, DC
CH2: I_{OUT} , 1A/Div, DC
TIME: 1ms/Div

Pin Description


| PIN | | | NAME | FUNCTION |
|------------------|---------------------|---|-------------|--|
| NO. | | | | |
| SOP-8/ MSOP-8 | SOT-23-5 APL3510 | | | |
| 1 | 2 | 2 | GND | Ground. |
| 2 | 4 | 5 | VIN | Power Supply Input. Connect this pin to external DC supply. |
| 3 | | | | |
| 4 | 3 | 4 | EN (A/C/E) | Enable Input. Pulling this pin to high will enable the device and pulling this pin to low will disable device. The EN pin cannot be left floating. |
| | | | ENB (B/D/F) | Enable Input. Pulling this pin to high will disable the device and pulling this pin to low will enable device. The ENB pin cannot be left floating. |
| 5 | 1 | 3 | OCB | Fault Indication Pin. This pin goes low when a current limit or an over-temperature condition is detected after a 8ms deglitch time. |
| 6 | 5 | 1 | VOUT | Output Voltage Pin. The output voltage follows the input voltage. When ENB is high or EN is low, the output voltage is discharged by an internal resistor. |
| 7 | | | | |
| 8 | | | | |

Block Diagram

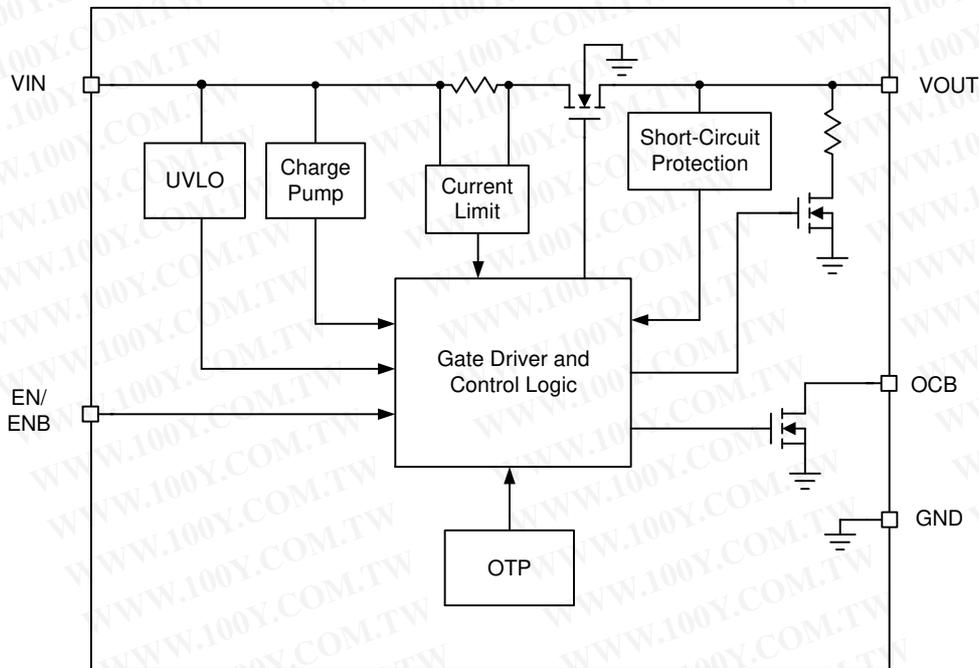

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Typical Application Circuit

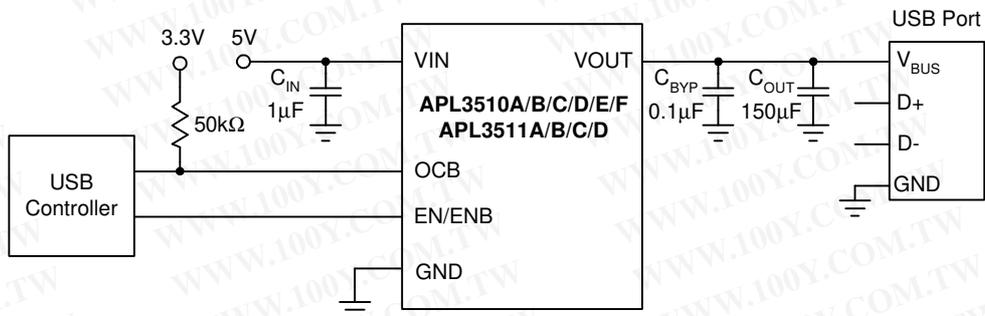

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Function Description

VIN Under-Voltage Lockout (UVLO)

The APL3510/1 series of power switches have a built-in under-voltage lockout circuit to keep the output shutting off until internal circuitry is operating properly. The UVLO circuit has hysteresis and a de-glitch feature so that it will typically ignore undershoot transients on the input. When input voltage exceeds the UVLO threshold, the output voltage starts a soft-start to reduce the inrush current.

Power Switch

The power switch is an N-channel MOSFET with a low $R_{DS(ON)}$. The internal power MOSFET does not have the body diode. When IC is off, the MOSFET prevents a current flowing from the VOUT back to VIN and VIN to VOUT.

Current-Limit Protection

The APL3510/1 series of power switches provide the current-limit protection function. During current limit, the devices limit output current at current limit threshold. For reliable operation, the device should not be operated in current limit for extended period.

Short-Circuit Protection

When the output voltage drops below $V_{IN}-1V$, which is caused by an over-load or a short-circuit, the devices limit the output current down to a safe level. The short-circuit current limit is used to reduce the power dissipation during short-circuit conditions. If the junction temperature reaches over-temperature threshold, the device will enter the thermal shutdown.

OCB Output

The APL3510/1 series of power switches provide an open-drain output to indicate that a fault has occurred. When any of current-limit or over-temperature protection occurs for a deglitch time of $t_{D(OCB)}$, the OCB goes low. Since the OCB pin is an open-drain output, connecting a resistor to a pull high voltage is necessary.

Enable/Disable

Pull the ENB above 2V or EN below 0.8V will disable the device, and pull ENB pin below 0.8V or EN above 2V will enable the device. When the IC is disabled, the supply current is reduced to less than 1 μ A. The enable input is

compatible with both TTL and CMOS logic levels. The EN/ENB pin cannot be left floating.

Over-Temperature Protection

When the junction temperature exceeds 140°C, the internal thermal sense circuit turns off the power FET and allows the device to cool down. When the device's junction temperature cools by 20°C, the internal thermal sense circuit will enable the device, resulting in a pulsed output during continuous thermal protection. Thermal protection is designed to protect the IC in the event of over temperature conditions. For normal operation, the junction temperature cannot exceed $T_J=+125^\circ C$.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Application Information

Input Capacitor

A 1 μ F ceramic bypass capacitor from V_{IN} to GND, located near the APL3510, is strongly recommended to suppress the ringing during short circuit fault event. Without the bypass capacitor, the output short may cause sufficient ringing on the input (from supply lead inductance) to damage internal control circuitry.

Output Capacitor

A low-ESR 150 μ F aluminum electrolytic or tantalum between V_{OUT} and GND is strongly recommended to reduce the voltage droop during hot-attachment of downstream peripheral. (Per USB 2.0, output ports must have a minimum 120 μ F of low-ESR bulk capacitance per hub). Higher-value output capacitor is better when the output load is heavy. Additionally, bypassing the output with a 0.1 μ F ceramic capacitor improves the immunity of the device to short-circuit transients.

Layout Consideration


The PCB layout should be carefully performed to maximize thermal dissipation and to minimize voltage drop, droop and EMI. The following guidelines must be considered:

1. Please place the input capacitors near the V_{IN} pin as close as possible.
2. Output decoupling capacitors for load must be placed near the load as close as possible for decoupling high-frequency ripples.
3. Locate APL3510 and output capacitors near the load to reduce parasitic resistance and inductance for excellent load transient performance.
4. The negative pins of the input and output capacitors and the GND pin must be connected to the ground plane of the load.
5. Keep V_{IN} and V_{OUT} traces as wide and short as possible.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Package Information

SOP-8

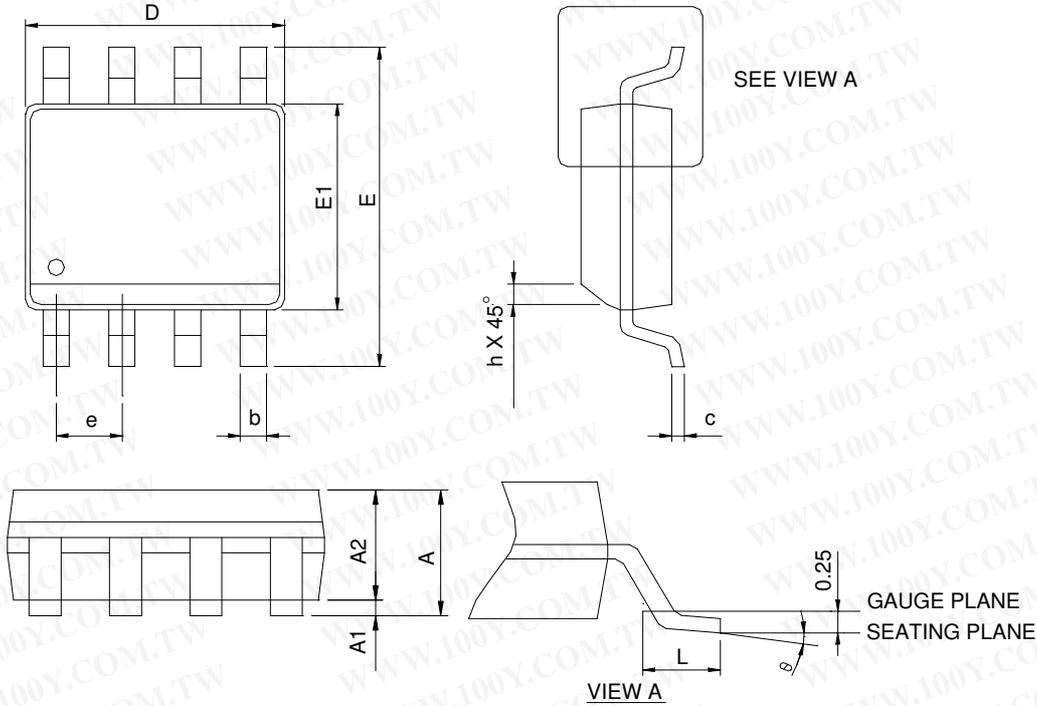


| SYMBOL | SOP-8 | | | |
|----------|-------------|-----------|-----------|-----------|
| | MILLIMETERS | | INCHES | |
| | MIN. | MAX. | MIN. | MAX. |
| A | | 1.75 | | 0.069 |
| A1 | 0.10 | 0.25 | 0.004 | 0.010 |
| A2 | 1.25 | | 0.049 | |
| b | 0.31 | 0.51 | 0.012 | 0.020 |
| c | 0.17 | 0.25 | 0.007 | 0.010 |
| D | 4.80 | 5.00 | 0.189 | 0.197 |
| E | 5.80 | 6.20 | 0.228 | 0.244 |
| E1 | 3.80 | 4.00 | 0.150 | 0.157 |
| e | 1.27 BSC | | 0.050 BSC | |
| h | 0.25 | 0.50 | 0.010 | 0.020 |
| L | 0.40 | 1.27 | 0.016 | 0.050 |
| θ | 0° | 8° | 0° | 8° |

- Note: 1. Follow JEDEC MS-012 AA.
 2. Dimension "D" does not include mold flash, protrusions or gate burrs. Mold flash, protrusion or gate burrs shall not exceed 6 mil per side.
 3. Dimension "E" does not include inter-lead flash or protrusions. Inter-lead flash and protrusions shall not exceed 10 mil per side.

Package Information

MSOP-8

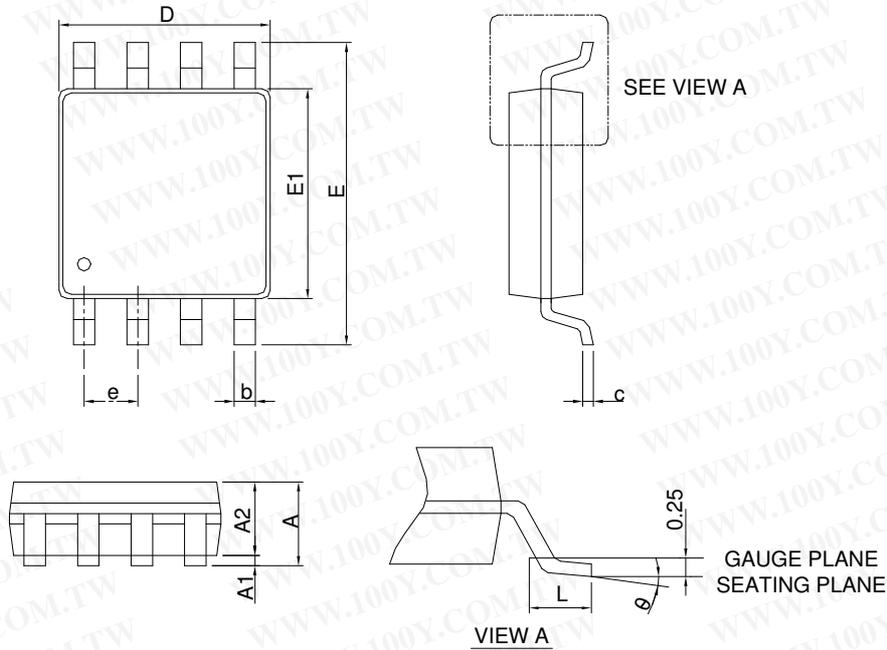


| SYMBOL | MSOP-8 | | | |
|----------|-------------|------|-----------|-------|
| | MILLIMETERS | | INCHES | |
| | MIN. | MAX. | MIN. | MAX. |
| A | | 1.10 | | 0.043 |
| A1 | 0.00 | 0.15 | 0.000 | 0.006 |
| A2 | 0.75 | 0.95 | 0.030 | 0.037 |
| b | 0.22 | 0.38 | 0.009 | 0.015 |
| c | 0.08 | 0.23 | 0.003 | 0.009 |
| D | 2.90 | 3.10 | 0.114 | 0.122 |
| E | 4.70 | 5.10 | 0.185 | 0.201 |
| E1 | 2.90 | 3.10 | 0.114 | 0.122 |
| e | 0.65 BSC | | 0.026 BSC | |
| L | 0.40 | 0.80 | 0.016 | 0.031 |
| θ | 0° | 8° | 0° | 8° |

- Note: 1. Follow JEDEC MO-187 AA.
 2. Dimension $\square D \square$ does not include mold flash, protrusions or gate burrs. Mold flash, protrusion or gate burrs shall not exceed 6 mil per side.
 3. Dimension $\square E1 \square$ does not include inter-lead flash or protrusions. Inter-lead flash and protrusions shall not exceed 5 mil per side.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Package Information

SOT-23-5

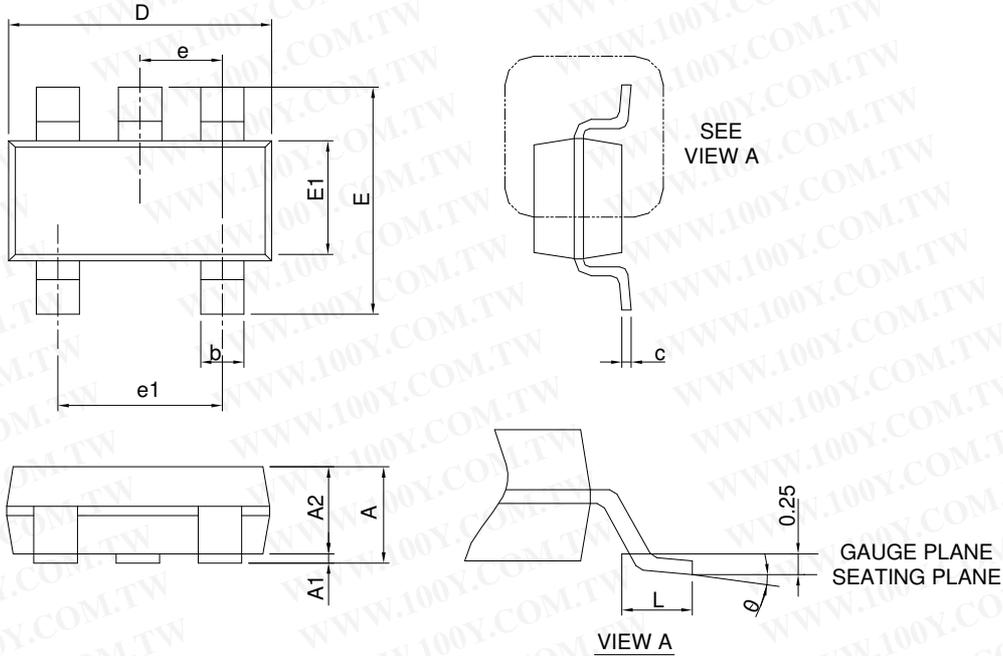


| SYMBOL | SOT-23-5 | | | |
|--------|-------------|------|-----------|-------|
| | MILLIMETERS | | INCHES | |
| | MIN. | MAX. | MIN. | MAX. |
| A | | 1.45 | 0.057 | |
| A1 | 0.00 | 0.15 | 0.000 | 0.006 |
| A2 | 0.90 | 1.30 | 0.035 | 0.051 |
| b | 0.30 | 0.50 | 0.012 | 0.020 |
| c | 0.08 | 0.22 | 0.003 | 0.009 |
| D | 2.70 | 3.10 | 0.106 | 0.122 |
| E | 2.60 | 3.00 | 0.102 | 0.118 |
| E1 | 1.40 | 1.80 | 0.055 | 0.071 |
| e | 0.95 BSC | | 0.037 BSC | |
| e1 | 1.90 BSC | | 0.075 BSC | |
| L | 0.30 | 0.60 | 0.012 | 0.024 |
| θ | 0° | 8° | 0° | 8° |

Note : 1. Follow JEDEC TO-178 AA.

2. Dimension D and E1 do not include mold flash, protrusions or gate burrs. Mold flash, protrusion or gate burrs shall not exceed 10 mil per side.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Carrier Tape & Reel Dimensions

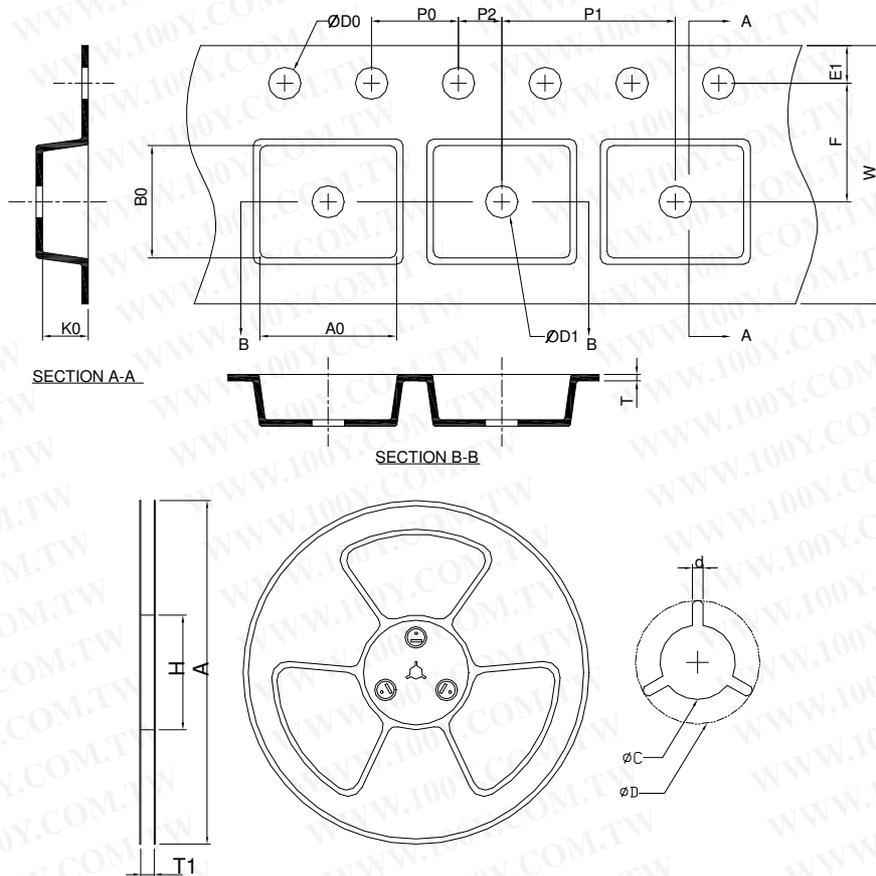

| Application | A | H | T1 | C | d | D | W | E1 | F |
|-------------|------------------|-----------------|--------------------|--------------------|----------|-------------------|-----------------|-----------------|-----------------|
| SOP-8 | 330.0 \pm 0.00 | 50 MIN. | 12.4+2.00 -0.00 | 13.0+0.50 -0.20 | 1.5 MIN. | 20.2 MIN. | 12.0 \pm 0.30 | 1.75 \pm 0.10 | 5.5 \pm 0.05 |
| | P0 | P1 | P2 | D0 | D1 | T | A0 | B0 | K0 |
| | 4.0 \pm 0.10 | 8.0 \pm 0.10 | 2.0 \pm 0.05 | 1.5+0.10 -0.00 | 1.5 MIN. | 0.6+0.00 -0.40 | 6.40 \pm 0.20 | 5.20 \pm 0.20 | 2.10 \pm 0.20 |
| Application | A | H | T1 | C | d | D | W | E1 | F |
| MSOP-8 | 330.0 \pm 0.00 | 50 MIN. | 12.4+2.00 -0.00 | 13.0+0.50 -0.20 | 1.5 MIN. | 20.2 MIN. | 12.0 \pm 0.30 | 1.75 \pm 0.10 | 5.5 \pm 0.05 |
| | P0 | P1 | P2 | D0 | D1 | T | A0 | B0 | K0 |
| | 4.00 \pm 0.10 | 8.00 \pm 0.10 | 2.00 \pm 0.05 | 1.5+0.10 -0.00 | 1.5 MIN. | 0.6+0.00 -0.40 | 5.30 \pm 0.20 | 3.30 \pm 0.20 | 1.40 \pm 0.20 |
| Application | A | H | T1 | C | d | D | W | E1 | F |
| SOT-23-5 | 178.0 \pm 0.00 | 50 MIN. | 8.4+2.00 -0.00 | 13.0+0.50 -0.20 | 1.5 MIN. | 20.2 MIN. | 8.0 \pm 0.30 | 1.75 \pm 0.10 | 3.5 \pm 0.05 |
| | P0 | P1 | P2 | D0 | D1 | T | A0 | B0 | K0 |
| | 4.0 \pm 0.10 | 4.0 \pm 0.10 | 2.0 \pm 0.05 | 1.5+0.10 -0.00 | 1.0 MIN. | 0.6+0.00 -0.40 | 3.20 \pm 0.20 | 3.10 \pm 0.20 | 1.50 \pm 0.20 |

(mm)


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Devices Per Unit


| Package Type | Unit | Quantity |
|--------------|-------------|----------|
| SOP-8 | Tape & Reel | 2500 |
| MSOP-8 | Tape & Reel | 3000 |
| SOT-23-5 | Tape & Reel | 3000 |

Taping Direction Information


SOP-8

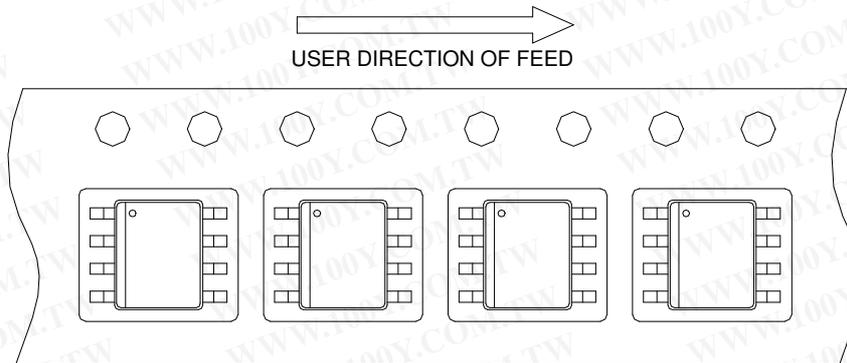

MSOP-8

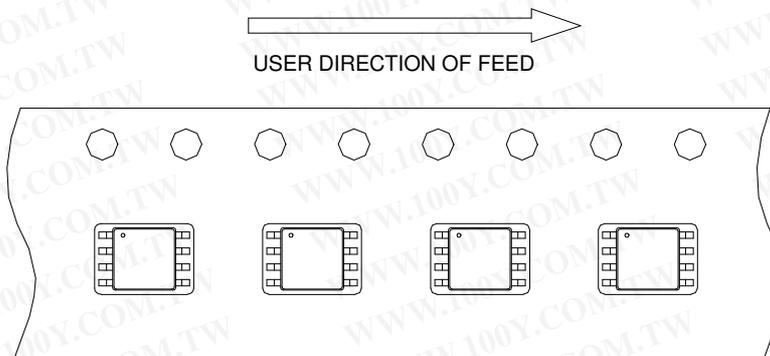


SOT-23-5

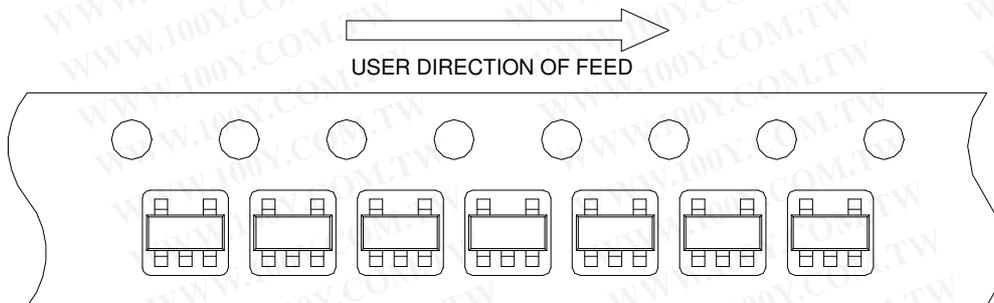

APL3510/ 1

Classification Profile

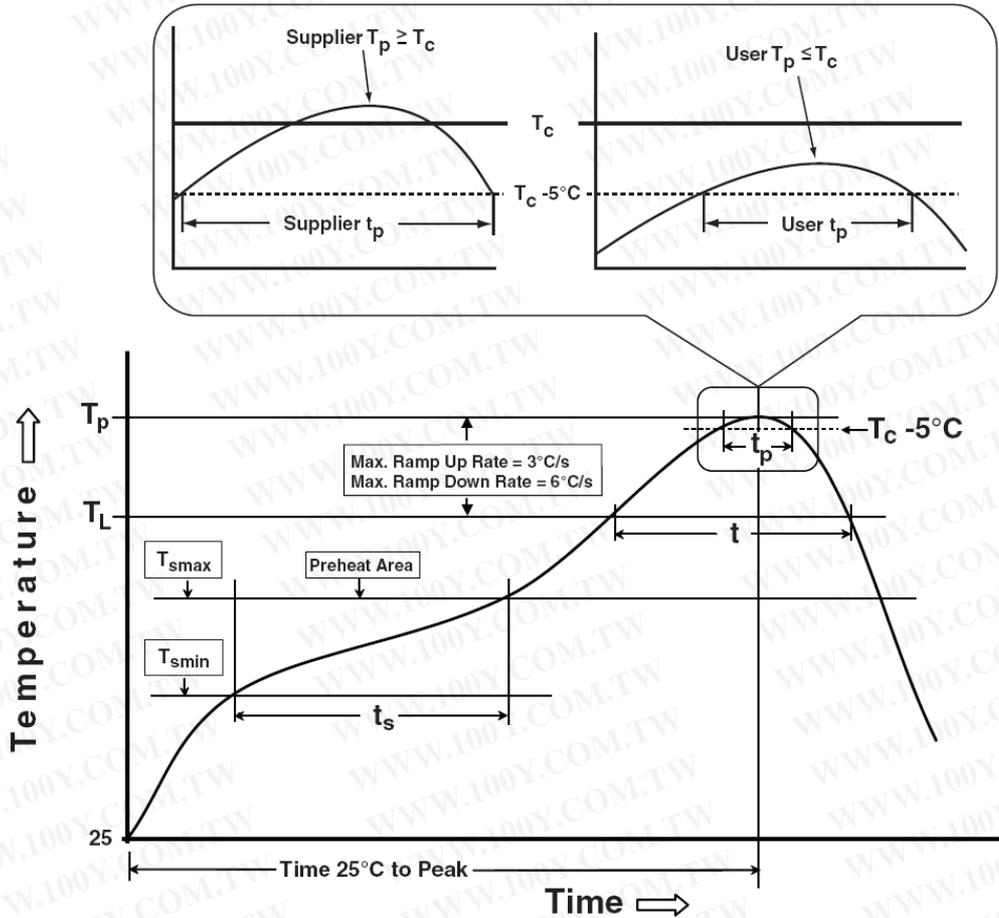

Classification Reflow Profiles

| Profile Feature | Sn-Pb Eutectic Assembly | Pb-Free Assembly |
|---|------------------------------------|------------------------------------|
| Preheat & Soak | | |
| Temperature min (T_{smin}) | 100 °C | 150 °C |
| Temperature max (T_{smax}) | 150 °C | 200 °C |
| Time (T_{smin} to T_{smax}) (t_s) | 60-120 seconds | 60-120 seconds |
| Average ramp-up rate (T_{smax} to T_p) | 3 °C/second max. | 3°C/second max. |
| Liquidous temperature (T_L) | 183 °C | 217 °C |
| Time at liquidous (t_l) | 60-150 seconds | 60-150 seconds |
| Peak package body Temperature (T_p)* | See Classification Temp in table 1 | See Classification Temp in table 2 |
| Time (t_p)** within 5°C of the specified classification temperature (T_c) | 20** seconds | 30** seconds |
| Average ramp-down rate (T_p to T_{smax}) | 6 °C/second max. | 6 °C/second max. |
| Time 25°C to peak temperature | 6 minutes max. | 8 minutes max. |

* Tolerance for peak profile Temperature (T_p) is defined as a supplier minimum and a user maximum.

** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.