


2SC4833
(TP5V40FS)

5A NPN

OUTLINE DIMENSIONS

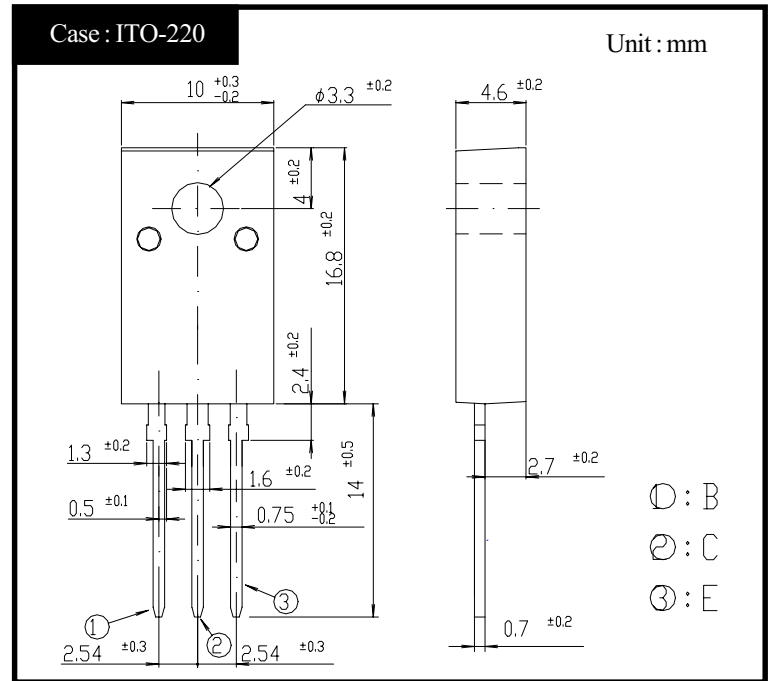

RATINGS

● Absolute Maximum Ratings


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		-55~150	°C
Junction Temperature	T_j		150	°C
Collector to Base Voltage	V_{CBO}		500	V
Collector to Emitter Voltage	V_{CEO}		400	V
Emitter to Base Voltage	V_{EBO}		7	V
Collector Current DC	I_C		5	A
Collector Current Peak	I_{CP}		10	
Base Current DC	I_B		2	A
Base Current Peak	I_{BP}		4	
Total Transistor Dissipation	P_T	$T_c = 25^\circ\text{C}$	35	W
Dielectric Strength	V_{dis}	Terminals to case, AC 1 minute	2	kV
Mounting Torque	TOR	(Recommended torque : 0.3N·m)	0.5	N·m

● Electrical Characteristics ($T_c=25^\circ\text{C}$)


Item	Symbol	Conditions	Ratings	Unit
Collector to Emitter Sustaining Voltage	$V_{CEO}(sus)$	$I_C = 0.1A$	Min 400	V
Collector Cutoff Current	I_{CBO}	At rated Voltage	Max 0.1	mA
	I_{CEO}		Max 0.1	
Emitter Cutoff Current	I_{EBO}	At rated Voltage	Max 0.1	mA
DC Current Gain	h_{FE}	$V_{CE} = 2V, I_C = 2.5A$	10~25	
	h_{FEL}	$V_{CE} = 2V, I_C = 1mA$	Min 10	
Collector to Emitter Saturation Voltage	$V_{CE}(sat)$	$I_C = 2.5A$	Max 1.0	V
Base to Emitter Saturation Voltage	$V_{BE}(sat)$	$I_B = 0.5A$	Max 1.5	V
Thermal Resistance	θ_{jc}	Junction to case	Max 3.57	°C/W
Transition Frequency	f_T	$V_{CE} = 10V, I_C = 0.5A$	TYP 13	MHz
Turn on Time	t_{on}	$I_C = 2.5A$	Max 0.3	μs
Storage Time	t_s	$I_{B1} = 0.5A, I_{B2} = 1A$	Max 1.3	
Fall Time	t_f	$R_L = 60\Omega, V_{BB2} = 4V$	Max 0.1	

2SC4833

$h_{FE} - I_c$

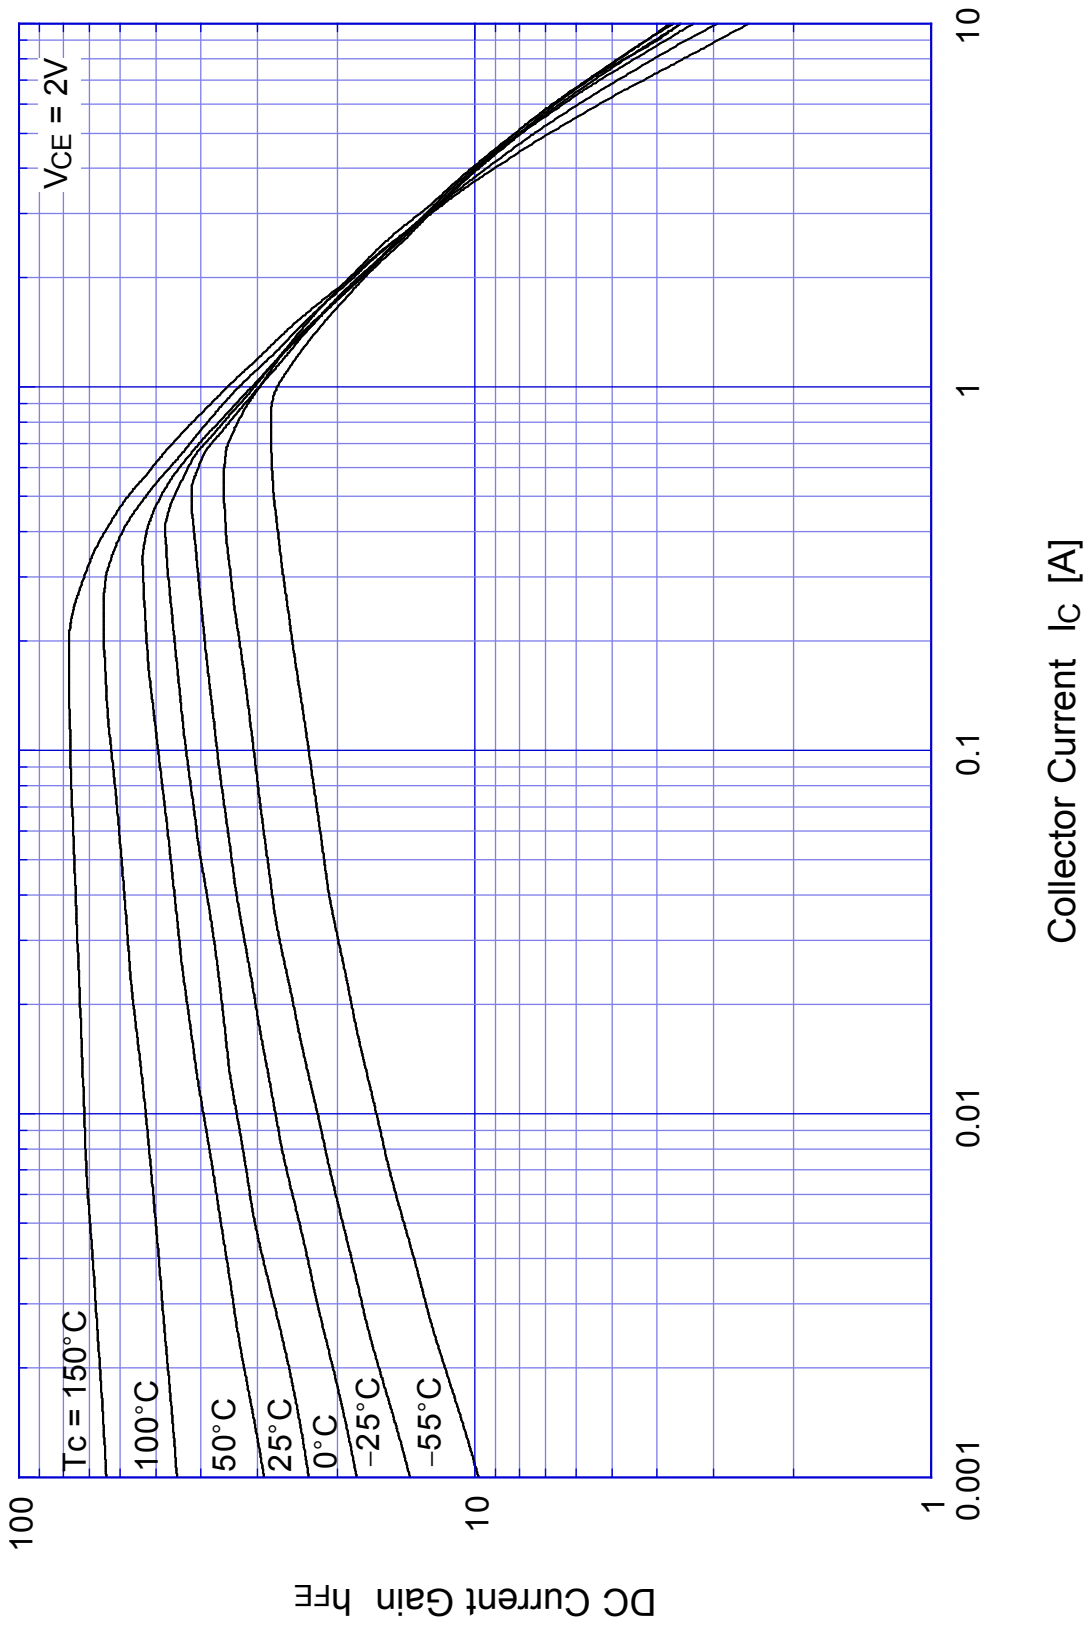


2SC4833 Saturation Voltage

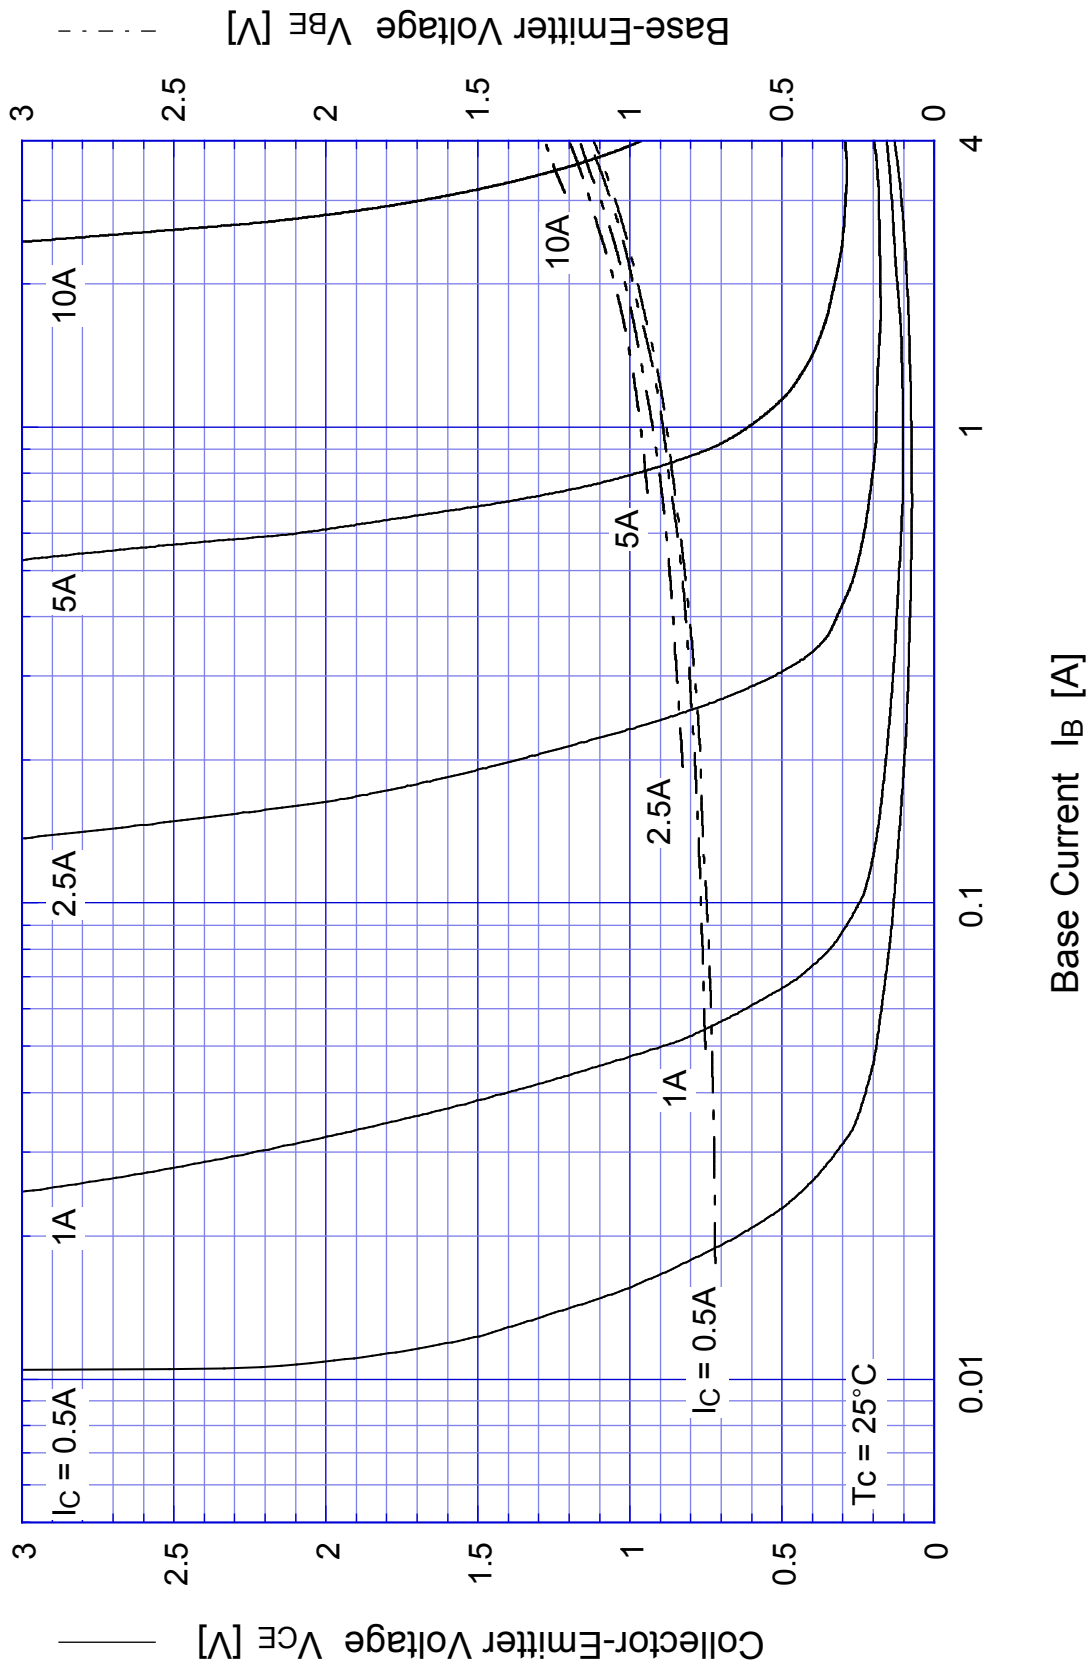


2SC4833

Switching Time - I_C

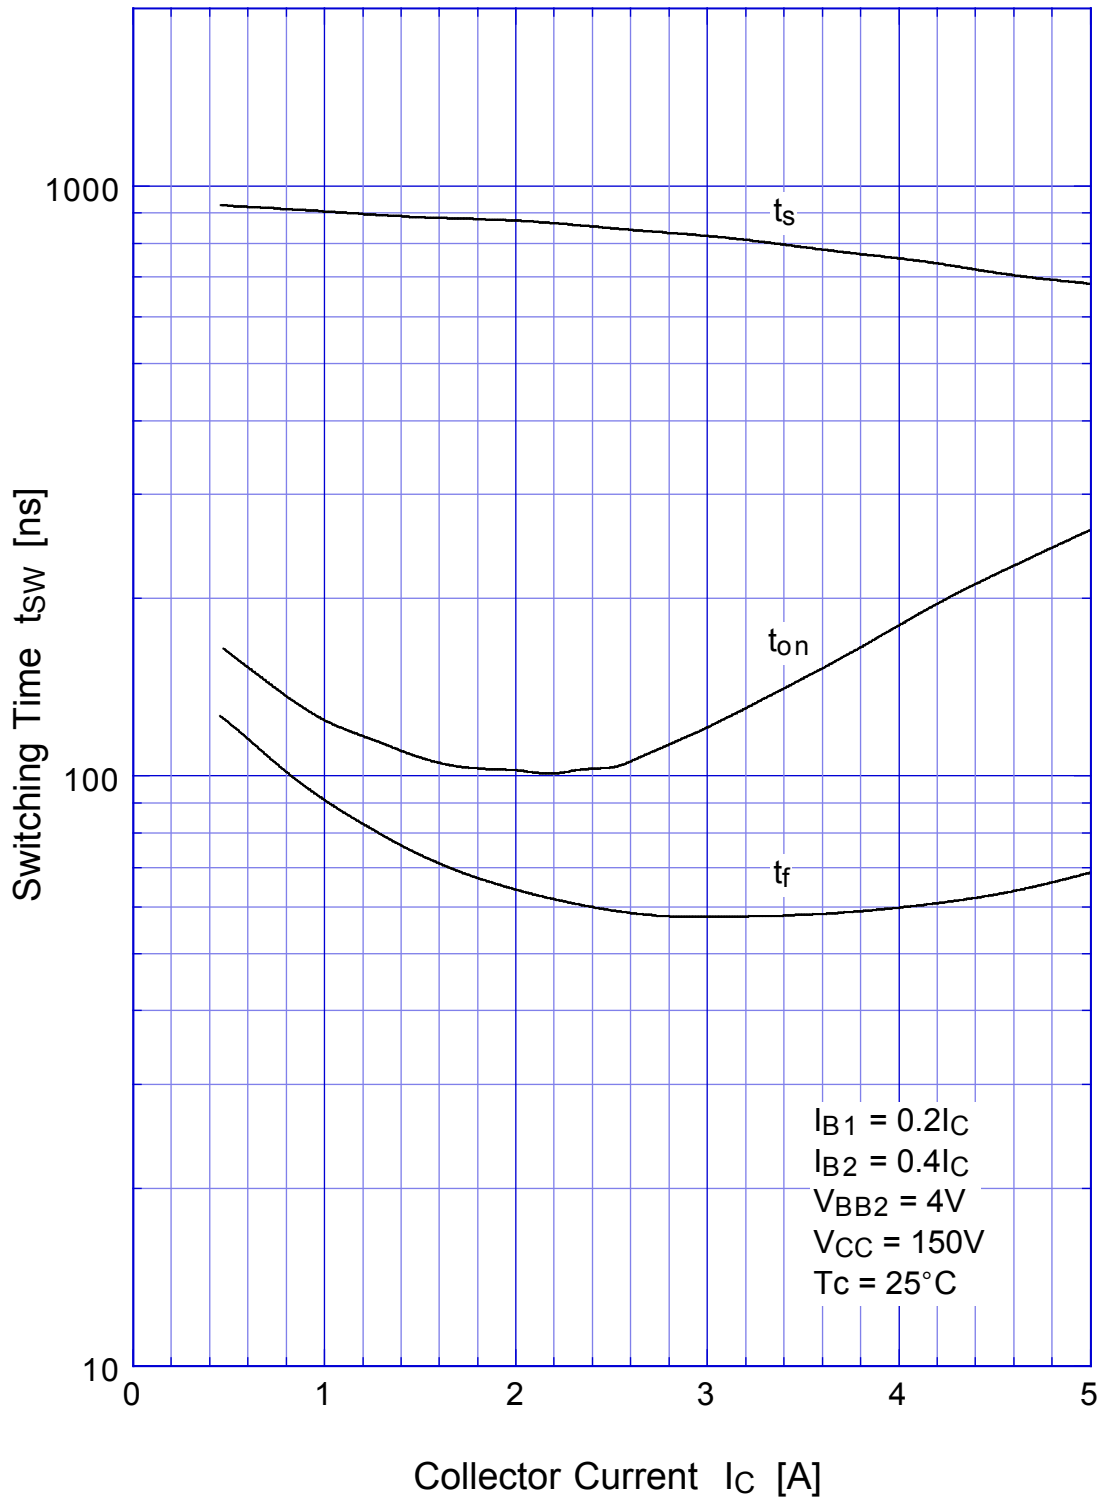


2SC4833

Switching Time - Tc

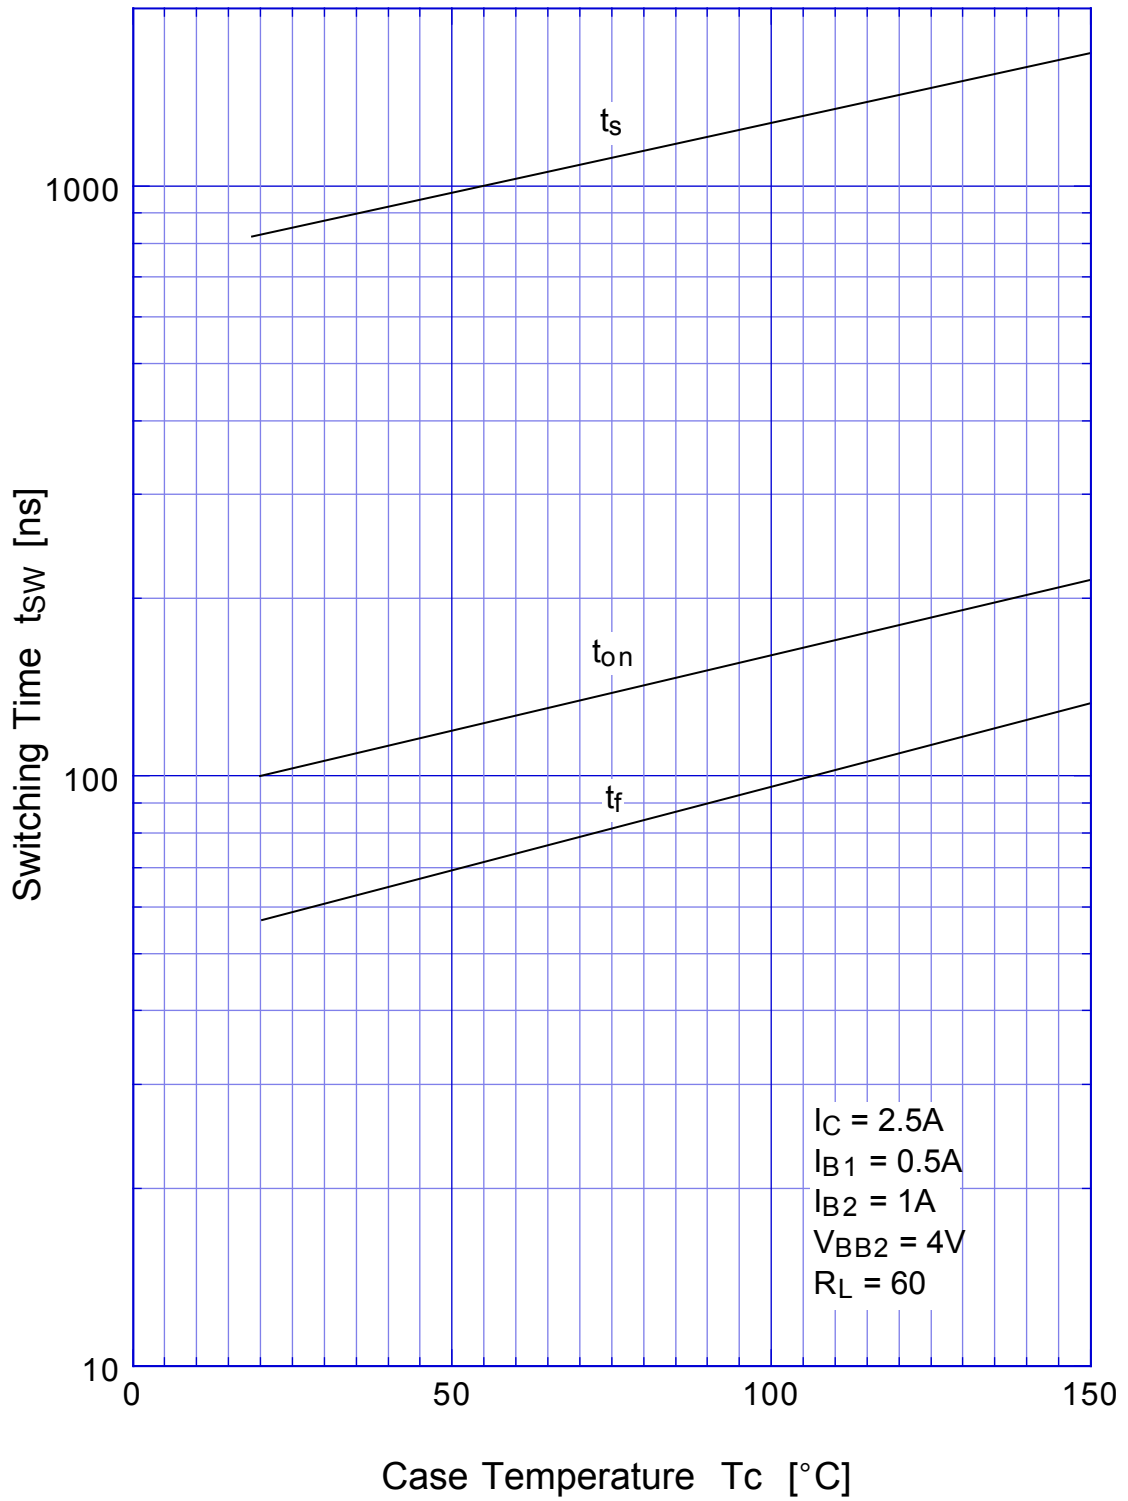


2SC4833

Forward Bias SOA

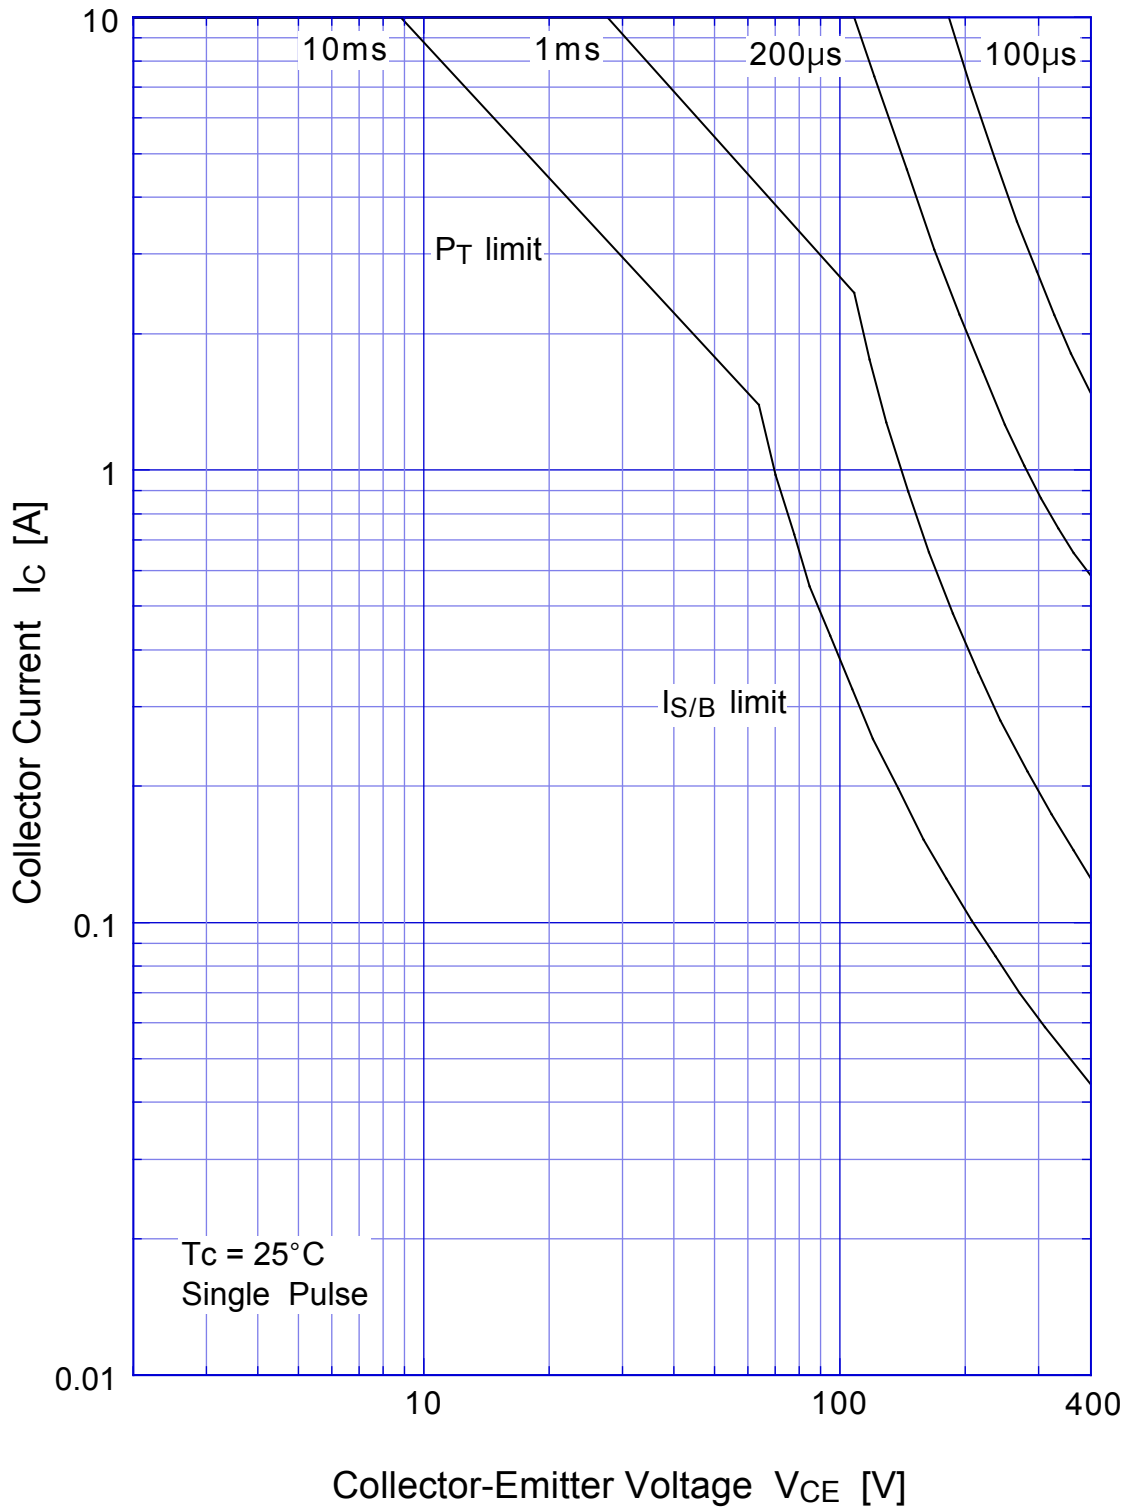


2SC4833 Collector Current Derating

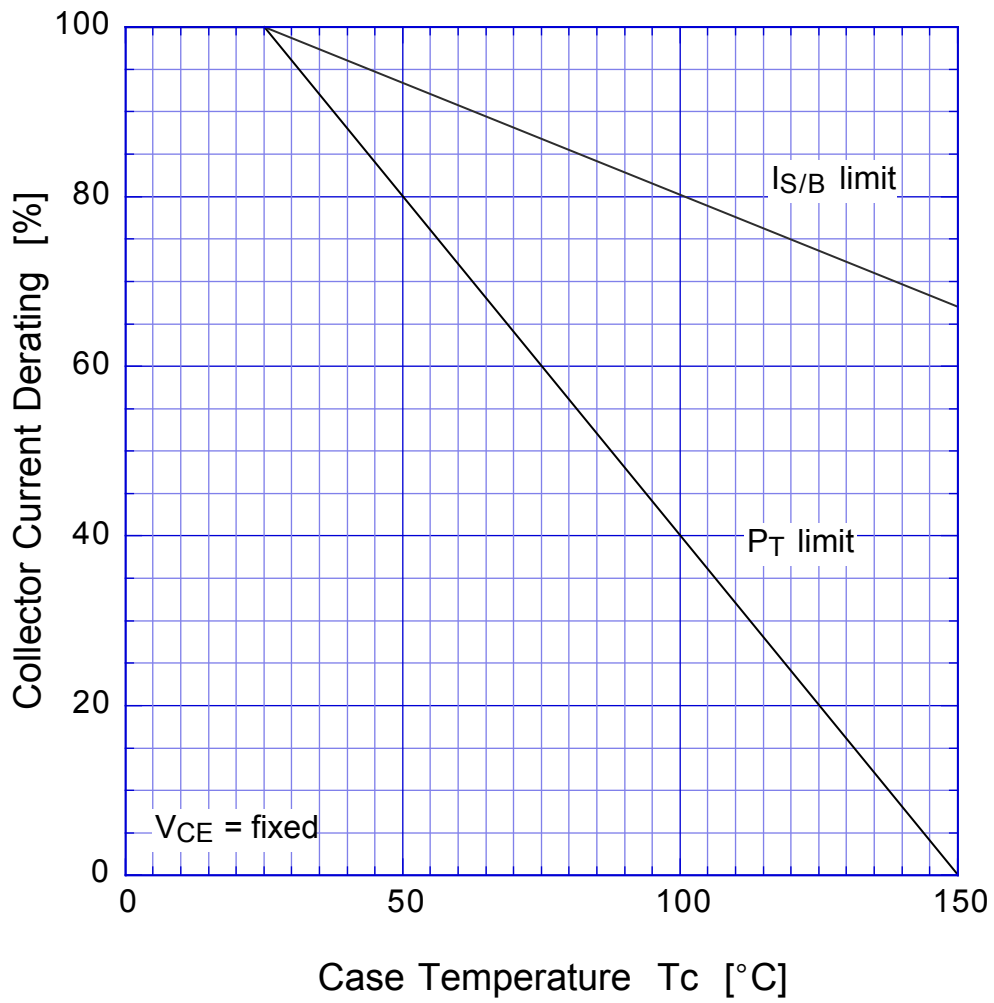


2SC4833

Reverse Bias SOA

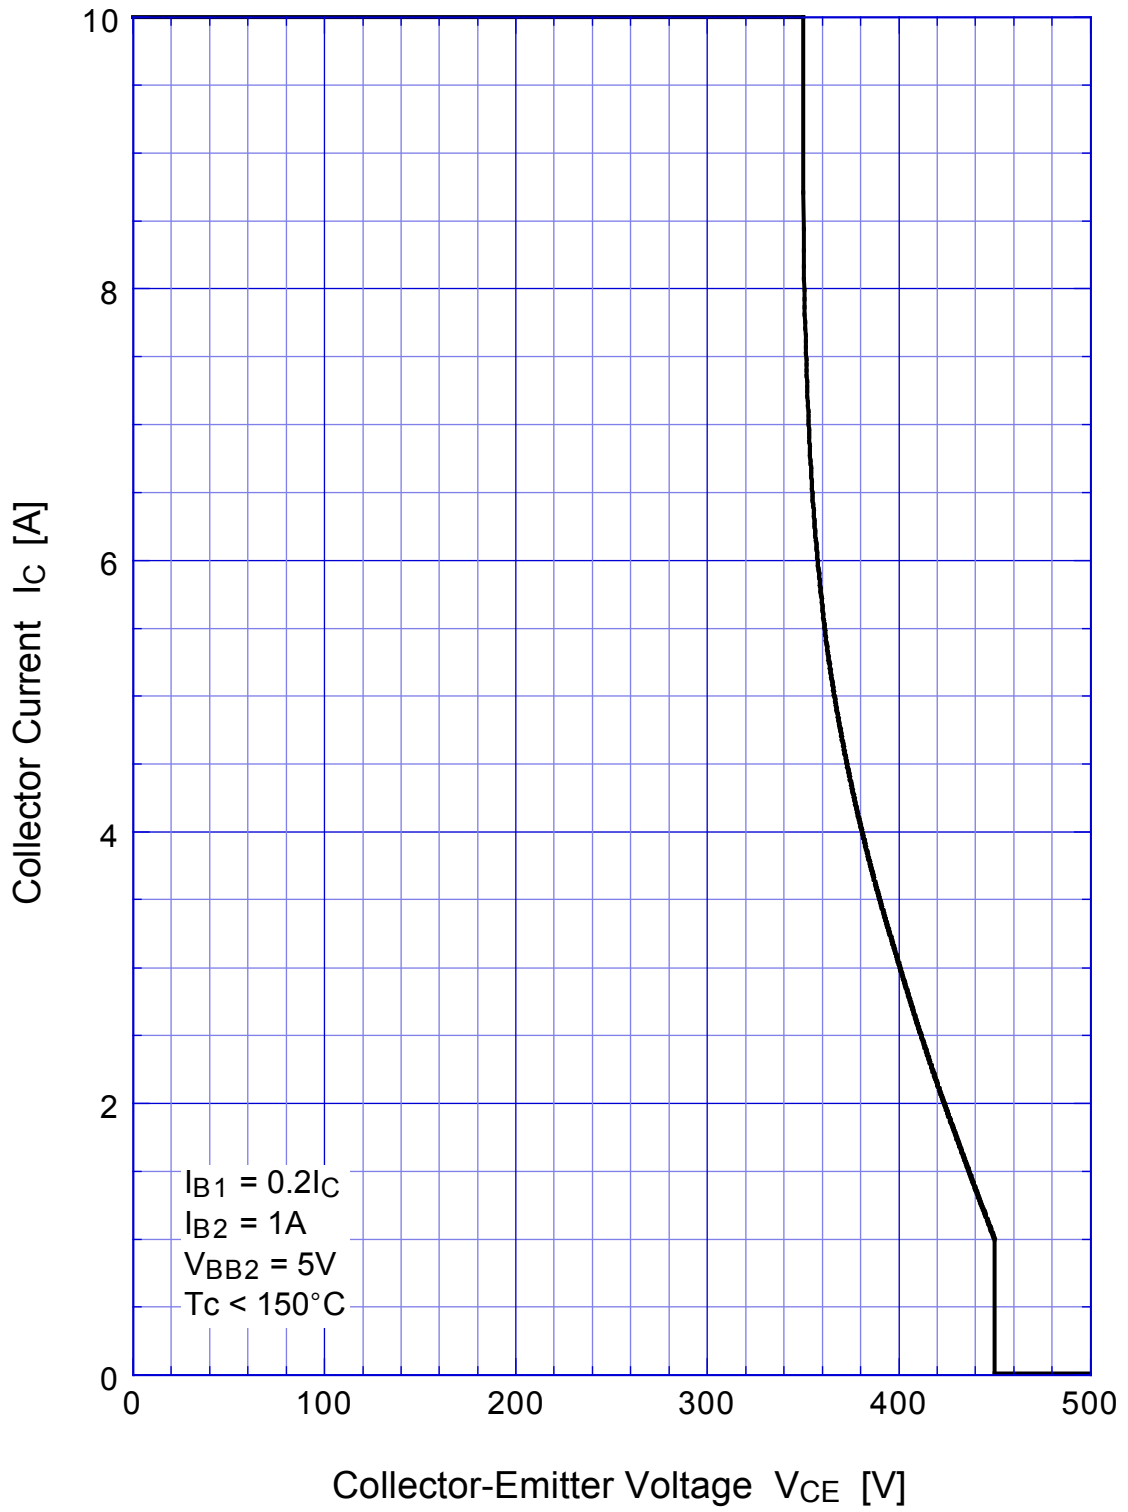

2SC4833 Transient Thermal Impedance

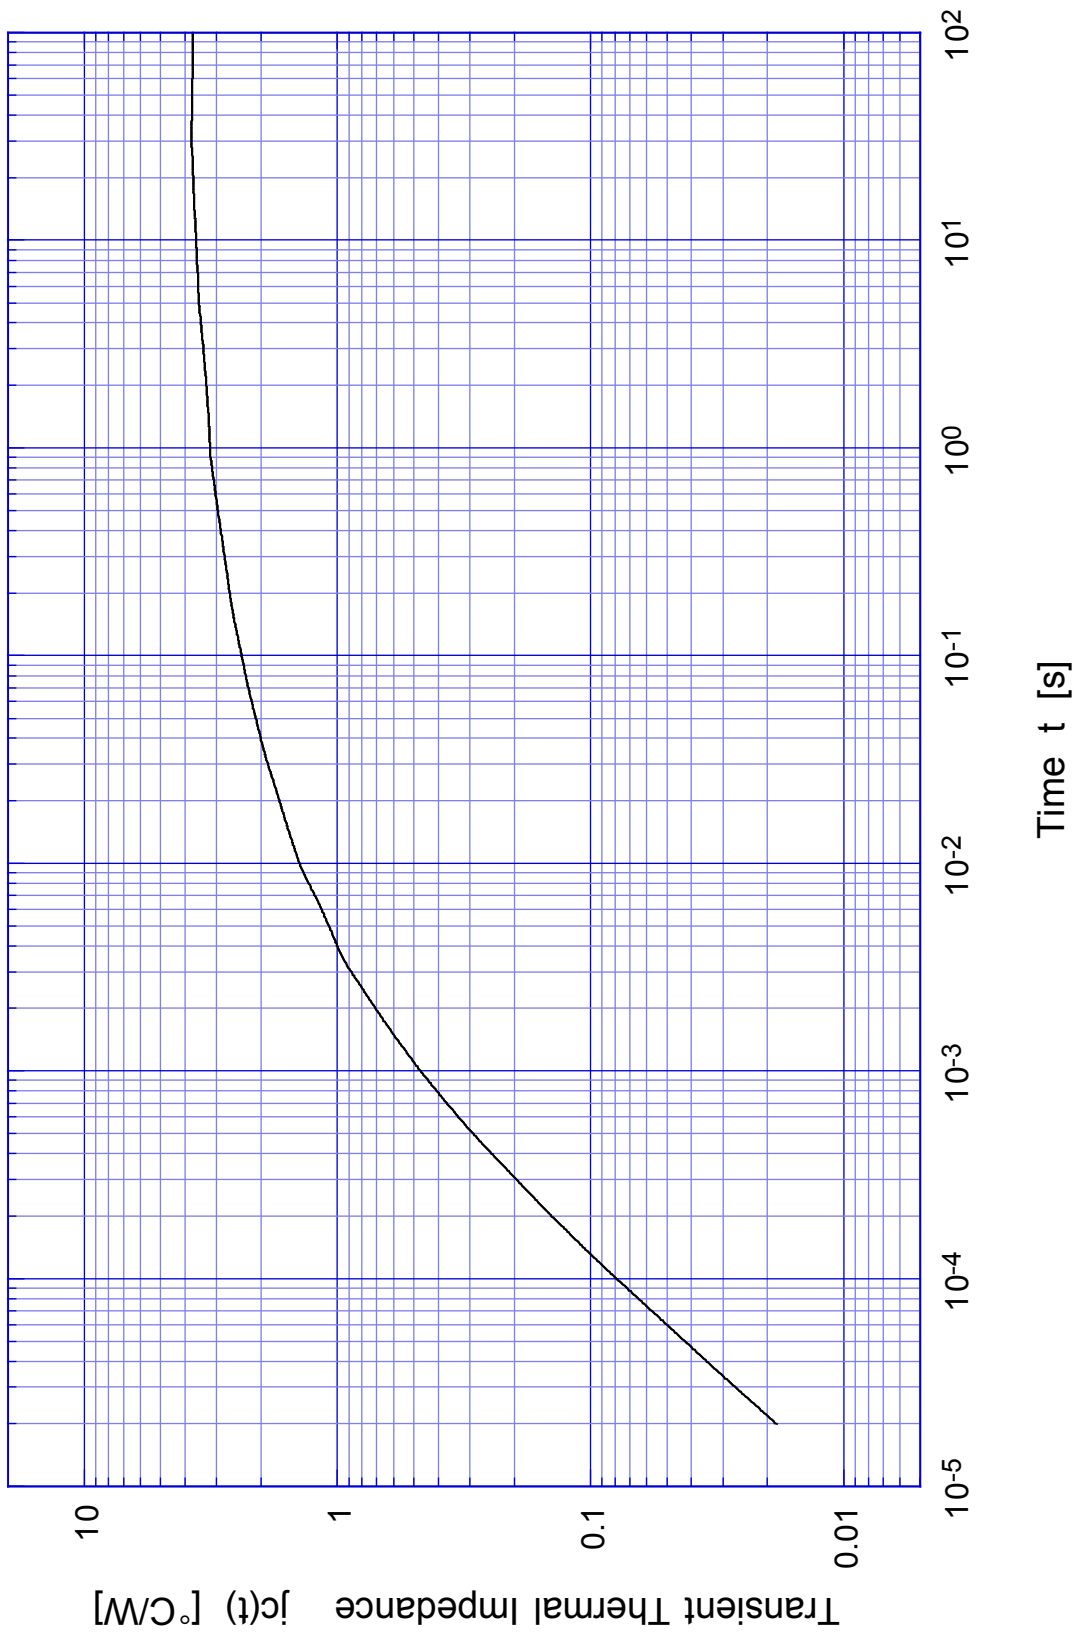

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.