



SF21 THRU SF28

2.0 AMPS. Super Fast Rectifiers



Voltage Range
50 to 600 Volts
Current
2.0 Amperes


Features

- ✧ Low forward voltage drop
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability

Mechanical Data

- ✧ Cases: Molded plastic
- ✧ Epoxy: UL 94V-O rate flame retardant
- ✧ Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: Color band denotes cathode end
- ✧ High temperature soldering guaranteed: 260°C/10 seconds/.375", (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ✧ Weight: 0.40 gram

DO-15

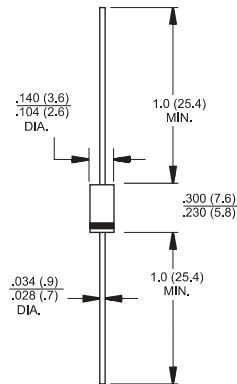

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	SF	SF	SF	SF	SF	SF	SF	SF	Units	
		21	22	23	24	25	26	27	28		
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	150	200	300	400	500	600	V	
Maximum RMS Voltage	V_{RMS}	35	70	105	140	210	280	350	420	V	
Maximum DC Blocking Voltage	V_{DC}	50	100	150	200	300	400	500	600	V	
Maximum Average Forward Rectified Current .375 (9.5mm) Lead Length @ $T_A = 55^\circ\text{C}$	$I_{(AV)}$	2.0								A	
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	50								A	
Maximum Instantaneous Forward Voltage @ 2.0A	V_F	0.95			1.3		1.7			V	
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=100^\circ\text{C}$	I_R	5.0					100				uA uA
Maximum Reverse Recovery Time (Note 1)	T_{rr}	35								nS	
Typical Junction Capacitance (Note 2)	C_j	40				30				pF	
Typical Thermal Resistance (Note 3)	$R_{\theta JA}$	65								°C/W	
Operating Temperature Range	T_J	-65 to +125								°C	
Storage Temperature Range	T_{STG}	-65 to +150								°C	

- Notes: 1. Reverse Recovery Test Conditions: $I_F=0.5A$, $I_R=1.0A$, $I_{RR}=0.25A$
 2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.
 3. Mount on Cu-Pad Size 10mm x 10mm on PCB.

RATINGS AND CHARACTERISTIC CURVES (SF21 THRU SF28)

FIG.1- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM


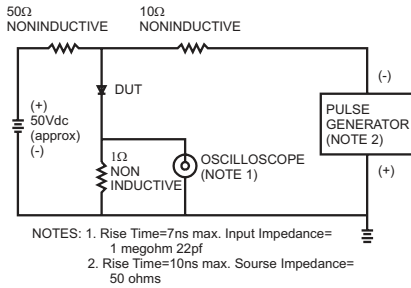


FIG.2- MAXIMUM AVERAGE FORWARD CURRENT DERATING




FIG.3- TYPICAL REVERSE CHARACTERISTICS

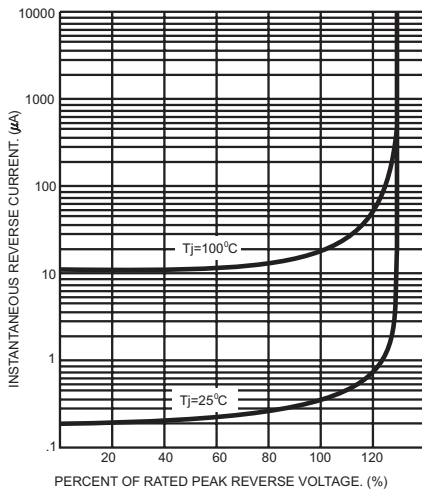


FIG.4- TYPICAL FORWARD CHARACTERISTICS

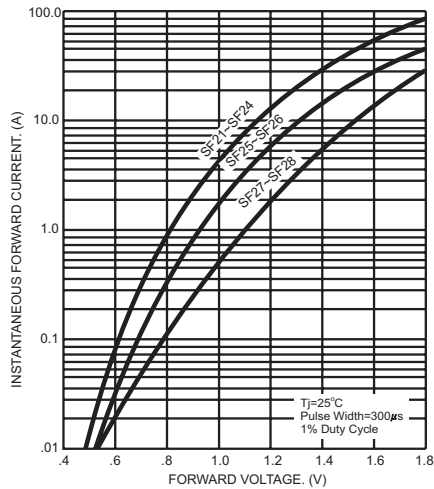


FIG.5- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


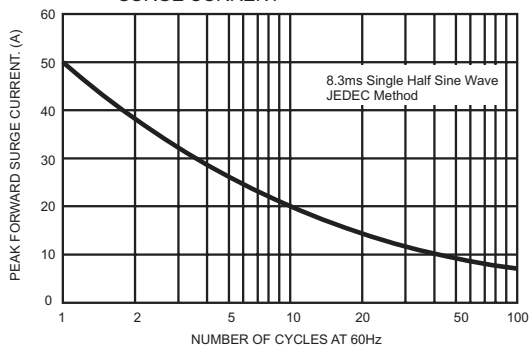


FIG.6- TYPICAL JUNCTION CAPACITANCE

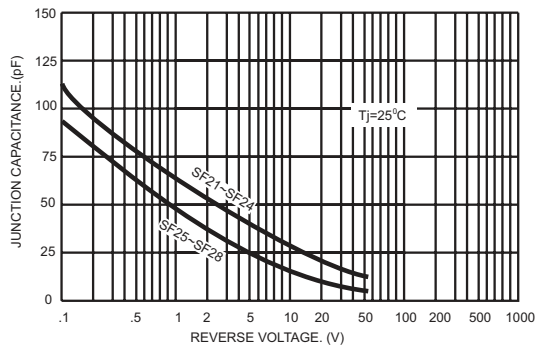

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.