


CERAMIC RESONATOR陶瓷谐振器

ZTACC/CS/CV□MG/MT/MX  
ZTTCC/CS/CV□MG/MT/MX


Series of Ceramic Resonator (Chip Type)

2.00-50.0MHz

系列片式陶瓷谐振器

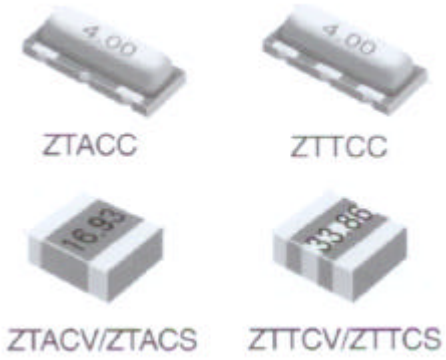

⊕ DIMENSIONS(Unit:mm) 外形尺寸 (ZTT Series)

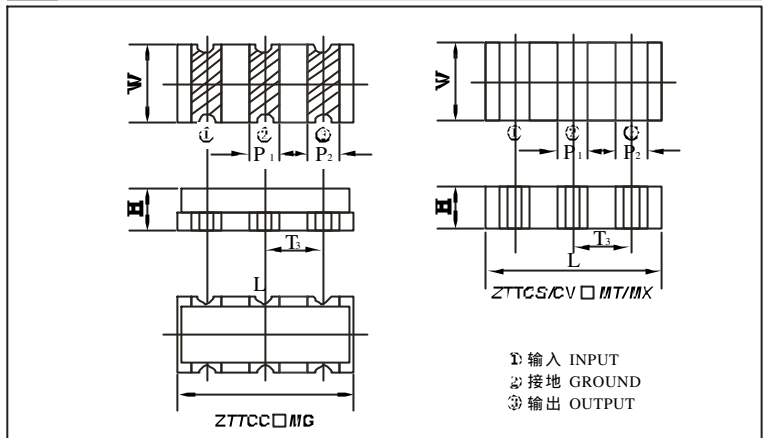

⊕ PRINCIPAL PARAMETERS 主要参数

Model 型号	Frequency Range 频率范围 (MHz)	Frequency Accuracy 频率精度 (+25°C)	Temperature Stability 温度稳定性 (-20°C ~ +80°C)	Aging (Ten Years) 老化性 (10年)
ZTACC□MG ZTTCC□MG	2.00-6.99	□ 0.5%	□ 0.3%	□ 0.3%
ZTACS/CV□MT/MX ZTTCS/CV□MT/MX	7.00-13.00	□ 0.5%	□ 0.4%	□ 0.3%
	13.01-50.00		□ 0.3%	

⊕ DIMENSION DATA

Code 标记 Model 型号	Dimensions(Unit:mm) 外形尺寸 (单位:毫米)								
	L	W	H	P <sub>1</sub>	P <sub>2</sub>	T <sub>1</sub>	T <sub>2</sub>	T <sub>3</sub>	W <sub>1</sub>
ZTACC/ZTTCC□MG	7.4 □ 0.3	3.4 □ 0.3	1.8 □ 0.3	1.2 □ 0.3	1.2 □ 0.3	1.5 □ 0.3	1.7 □ 0.3	2.5 □ 0.3	4.0 □ 0.3
ZTACS/ZTCS □MT/MX	4.7 □ 0.2	4.1 □ 0.2	1.6 □ 0.3	1.0 □ 0.4	0.8 □ 0.4	1.3 □ 0.2	0.8 □ 0.2	1.95 □ 0.2	5.1 □ 0.2
ZTACV/ZTTCV □MT/MX	3.7 □ 0.2	3.1 □ 0.2	1.2 □ 0.3	0.9 □ 0.3	0.7 □ 0.3	1.0 □ 0.2	0.7 □ 0.2	1.5 □ 0.2	4.1 □ 0.2

注: ZTA系列产品无中间(接地)电极  
 Note: No middle terminal for ZTA series