


GS(GR) Series General Purpose 85°C



Features

- ◆ Wide CV value range.
- ◆ Load life 2000 hrs at 85°C.
- ◆ Safety vent construction design.
- ◆ For detail specifications, please refer to Engineering Bulletin No. E101
- ◆ RoHS Compliant


Specifications

Item	Performance Characteristics																																		
Operating Temperature Range	-40 to +85°C	-25 to +85°C																																	
Rated Voltage Range	6.3 to 100 VDC	160 to 450 VDC																																	
Capacitance Range	0.1 to 33000 µF	0.47 to 470 µF																																	
Capacitance Tolerance	±20% (120Hz, +20°C)																																		
Leakage Current (+20°C, max.)	I ≤ 0.01 CV or 3 (µA)																																		
	I ≤ 0.03 CV (µA)																																		
After 1 minute whichever is greater measures with rated working voltage applied.																																			
Dissipation Factor (tan δ, at 20°C, 120Hz)	<table border="1"> <tr> <td>Working Voltage(VDC)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>D.F. (%)max.</td> <td>22</td> <td>19</td> <td>16</td> <td>14</td> <td>12</td> <td>10</td> <td>9</td> <td>8</td> </tr> </table>								Working Voltage(VDC)	6.3	10	16	25	35	50	63	100	D.F. (%)max.	22	19	16	14	12	10	9	8									
	Working Voltage(VDC)	6.3	10	16	25	35	50	63	100																										
	D.F. (%)max.	22	19	16	14	12	10	9	8																										
	<table border="1"> <tr> <td>Working Voltage(VDC)</td> <td>160</td> <td>200</td> <td>250</td> <td>350</td> <td>400</td> <td>450</td> </tr> <tr> <td>D.F. (%)max.</td> <td>12</td> <td>12</td> <td>12</td> <td>15</td> <td>15</td> <td>17</td> </tr> </table>								Working Voltage(VDC)	160	200	250	350	400	450	D.F. (%)max.	12	12	12	15	15	17													
Working Voltage(VDC)	160	200	250	350	400	450																													
D.F. (%)max.	12	12	12	15	15	17																													
For capacitance > 1000 µF, add 2% per another 1000 µF.																																			
Low Temperature Characteristics (at 120Hz)	Impedance ratio max																																		
	<table border="1"> <tr> <td>Working Voltage(VDC)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>Z-25°C/Z+20°C</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>								Working Voltage(VDC)	6.3	10	16	25	35	50	63	100	Z-25°C/Z+20°C	4	3	2	2	2	2	2	2	Z-40°C/Z+20°C	8	6	4	3	3	3	3	3
	Working Voltage(VDC)	6.3	10	16	25	35	50	63	100																										
	Z-25°C/Z+20°C	4	3	2	2	2	2	2	2																										
	Z-40°C/Z+20°C	8	6	4	3	3	3	3	3																										
<table border="1"> <tr> <td>Working Voltage(VDC)</td> <td>160</td> <td>200</td> <td>250</td> <td>350</td> <td>400</td> <td>450</td> </tr> <tr> <td>Z-25°C/Z+20°C</td> <td>2</td> <td>2</td> <td>3</td> <td>5</td> <td>15</td> <td>15</td> </tr> </table>								Working Voltage(VDC)	160	200	250	350	400	450	Z-25°C/Z+20°C	2	2	3	5	15	15														
Working Voltage(VDC)	160	200	250	350	400	450																													
Z-25°C/Z+20°C	2	2	3	5	15	15																													
For Capacitance > 1000 µF, add 0.5 per another 1000 µF for -25°C/+20°C add 1 per another 1000 µF for -40°C/+20°C																																			
Load Life	Test conditions Duration time :2000Hrs Ambient temperature :+85°C Applied voltage :Rated DC working voltage After test requirement at +20°C Capacitance change :≤ ±20% of the initial measured value Dissipation factor :≤ 200% of the initial specified value Leakage Current :≤ The initial specified value																																		
	Shelf Life	Test conditions Duration time :1000Hrs Ambient temperature :+85°C Applied voltage :None After test requirement at +20°C: Same limits as Load life. Pre-treatment for measurements shall be conducted after application of DC working voltage for 30 minutes.																																	

Multiplier for Ripple Current vs. Frequency

CAP(µF)\Frequency(Hz)	50(60)	120	400	1K	10K	50K-100K
CAP ≤ 10	0.8	1	1.30	1.45	1.65	1.70
10 < CAP ≤ 100	0.8	1	1.23	1.36	1.48	1.53
100 < CAP ≤ 1000	0.8	1	1.16	1.25	1.35	1.38
1000 < CAP	0.8	1	1.11	1.17	1.25	1.28

Diagram of Dimensions:(unit:mm)

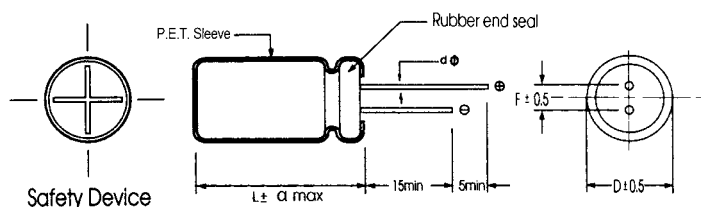

D φ	5	6.3	8	10	13	16	18	22
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10
d φ	0.5		L < 20 0.5	L ≥ 20 0.6	0.6		0.8	

α	D < 18	D = 18		D > 18
		L < 35.5	L ≥ 35.5	
	1.5	1.5	2.0	2.0

For Audio Equipment

Case Size

φ DxL(mm)

WV Cap(μF)	6.3		10		16		25		35	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
4.7										
10					5x11	44	5x11	34	5x11	44
22			5x11	66	5x11	83	5x11	50	5x11	66
33	5x11	72	5x11	88	5x11	84	5x11	94	5x11	108
47	5x11	88	5x11	105	5x11	132	5x11	105	5x11	121
								132	5x11	143
									6.3x11	154
68	5x11	110	5x11	132	5x11	149	6.3x11	176	6.3x11	198
100	5x11	143	5x11	198	5x11	176	6.3x11	209	6.3x11	231
					6.3x11	204			8x11.5	253
120	5x11	165	5x11	209	6.3x11	231	6.3x11	253	8x11.5	275
150	5x11	198	5x11	231	6.3x11	253	6.3x11	275	8x11.5	308
180	5x11	220	6.3x11	253	6.3x11	275	6.3x11	280	8x11.5	352
							8x11.5	319		
220	5x11	242	6.3x11	294	6.3x11	308	6.3x11	310	8x11.5	385
	6.3x11	264			8x11.5	352	8x11.5	363	10x12.5	407
330	6.3x11	330	6.3x11	363	8x11.5	407	8x11.5	451	10x12.5	528
							10x12.5	484	10x16	539
470	6.3x11	385	6.3x11	418	8x11.5	517	8x11.5	561	10x16	693
	8x11.5	418	8x11.5	440			10x12.5	594	10x20	748
560	8x11.5	473	8x11.5	506	10x12.5	572	10x16	693	10x20	847
680	8x11.5	539	8x11.5	572	8x16	640	10x16	792	10x20	891
					10x12.5	682	10x20	825		
820	8x11.5	605	10x12.5	671	10x16	803	10x20	891	13x20	1045
	8x11.5	649	8x16	725	10x16	869	10x20	1050	13x20	1265
1000	10x12.5	715	8x20	803						
			10x12.5	726						
1200	10x12.5	814	10x16	902	10x16	979	13x20	1155	13x20	1375
1500	10x16	935	10x16	1001	10x20	1100	13x20	1353	13x25	1570
1800	10x16	1035	10x20	1089	13x20	1298	13x20	1496	16x25	1749
2200	10x20	1135	10x20	1210	13x20	1485	13x25	1705	16x25	1870
			13x20	1330					16x31.5	1980
2700	10x20	1353	13x20	1419	13x20	1716	16x25	1804	16x31.5	2178
3300	10x20	1430	13x20	1540	13x20	1750	16x25	1870	16x31.5	2365
	13x20	1485			13x25	1870	16x31.5	2145	16x35.5	2552
3900	13x20	1529	13x20	1760	16x25	2002	16x31.5	2343	18x31.5	2640
4700	13x20	1672	13x25	1980	16x25	2310	16x31.5	2640	18x35.5	2860
	13x25	1870								
5600	13x25	2002	16x25	2189	16x31.5	2453	18x31.5	2816	18x41	2915
6800	16x25	2310	16x25	2475	16x31.5	2805	18x35.5	2970	22x41	3630
8200	16x25	2332	16x31.5	2541	16x35.5	2893	18x35.5	2981		
10000	16x31.5	2530	16x35.5	2640	18x35.5	2970	22x41	3960		
			18x35.5	2915	18x41	3190				
12000	16x35.5	2783	18x35.5	3025	18x35.5	3058				
					18x41	3212				
15000	16x35.5	2948	18x35.5	3310	22x41	3905				
	18x35.5	3168								
18000	18x35.5	3300	18x41	3410						
22000	18x41	3575	22x41	4092						
33000	22x41	4290	22x51	4620						

Ripple Current (mA, rms) at 85°C 120Hz

φ DxL(mm)

WV Cap(μF)	50		63		100		160		200	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1	5x11	3.3	5x11	4	5x11	4.5				
0.22	5x11	3.3	5x11	4	5x11	6				
0.33	5x11	5.5	5x11	6	5x11	10				
0.47	5x11	7.5	5x11	8	5x11	14	5x11	12	5x11	12
1	5x11	17	5x11	17	5x11	27	5x11	17	6.3x11	17
2.2	5x11	28	5x11	31	5x11	40	6.3x11	30	6.3x11	30
3.3	5x11	39	5x11	39	5x11	48	6.3x11	36	6.3x11	36
4.7	5x11	46	5x11	50	5x11	58	6.3x11	40	8x11.5	51
							8x11.5	48		
10	5x11	72	5x11	77	5x11	85	8x11.5	80	10x12.5	83
					6.3x11	92			10x16	88
22	5x11	110	6.3x11	127	6.3x11	157	10x12.5	135	10x20	135
					8x11.5	164				
33	5x11	132	6.3x11	149	8x11.5	206	10x16	180	13x20	205
	6.3x11	138	8x11.5	160	10x12.5	218				
47	6.3x11	165	6.3x11	198	10x12.5	278	10x20	230	13x20	250
			8x11.5	209	10x16	303			13x25	280
68	8x11.5	220	8x11.5	253	10x16	387	13x20	360	13x25	370
100	8x11.5	286	10x12.5	330	10x20	472	13x25	430	16x25	460
120	8x11.5	319	10x16	396	10x20	532	16x25	530	16x25	550
150	10x12.5	363	10x16	462	13x20	629	16x25	560	16x31.5	580
180	10x12.5	418	10x16	528	13x20	667	16x31.5	650	16x31.5	660
220	10x12.5	468	10x16	550	13x25	740	16x31.5	850	18x35.5	750
	10x16	484	10x20	583	16x25	872	16x35.5	890	18x35.5	800
330	10x16	649	10x20	759	13x25	920	18x31.5	890	18x35.5	940
	10x20	671	13x20	781	16x25	1040	18x35.5	920	18x41	1000
470	10x20	828	13x20	968	16x25	1210	18x35.5	1180	18x41	1330
	13x20	858	13x25	1023	16x31.5	1330	18x41	1250		
560	13x20	902	13x25	1056	16x35.5	1465	18x45	1320		
			16x25	1089						
680	13x20	1056	16x25	1265	16x35.5	1634				
820	13x25	1287	16x25	1430	18x35.5	1815				
1000	13x25	1485	16x25	1540	18x41	1940				
	16x25	1540	16x31.5	1705						
1200	16x25	1617	16x31.5	1837						
1500	16x31.5	1848	16x35.5	2090						
1800	16x31.5	2112	16x35.5	2255						
2200	16x35.5	2310	18x35.5	2475						
			18x41	2750						
2700	18x31.5	2420	22x41	2860						
3300	18x35.5	2750	22x41	3080						
3900	18x41	2871								
4700	22x41	3355								

Ripple Current (mA, rms) at 85°C 120Hz

φ DxL(mm)

WV Cap(μF)	250		350		400		450	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.47	5x11	12	6.3x11	15	6.3x11	12	6.3x11	12
					8x11.5	12		
1	6.3x11	17	6.3x11	22	6.3x11	20	8x11.5	22
					8x11.5	22		
2.2	6.3x11	20	8x11.5	30	8x11.5	32	8x11.5	32
	8x11.5	33	10x12.5	32	10x12.5	35	10x12.5	35
3.3	8x11.5	38	8x11.5	46	8x11.5	45	8X11.5	35
							10x12.5	37
4.7	10x12.5	43	10x12.5	51	10x12.5	53	10x16	40
	8x11.5	48	8X11.5	55	8X11.5	55	10X12.5	50
10			10x12.5	63	10x12.5	66		
	10x12.5	51	10x16	66	10x16	70	10x16	56
22	10x12.5	90	10x16	115	10X16	100	10X20	90
					10x20	115	13x20	105
33			10X20	125	13x20	120	13x25	110
	10x20	135	13x20	180	13x20	190	13X20	140
47							13x25	150
	13x20	165			13x25	200	16x25	165
68	13x20	210	13X20	225	13x25	230	16x25	190
	13x25	220	13x25	250	16x25	250	16x31.5	210
100	13x20	240	16x25	290	16x25	270	16x31.5	260
	13X25	260						
120	13X25	260			16x31.5	290	16x35.5	280
	13X25	340	16x31.5	400	16x35.5	410	18x31.5	370
150	16x25	390			18X25	380	18x35.5	390
					18x31.5	420		
180	16X25	410	18x31.5	430	18x31.5	440	18x41	420
	16x31.5	450			18x35.5	450		
120	16x31.5	560	18x35.5	550	18x41	520	18x45	510
150	18x31.5	600	18x41	570				
180	18x31.5	680						

Ripple Current (mA, rms) at 85°C 120Hz