

LZB60-A Motor Running Capacitors



Construction

- Dielectric: Metallized polypropylene film
- Plastic case
- Epoxy resin

Features

- Self-healing properties
- Low dissipation factor
- High insulation resistance
- S0 safety class to IEC 60252-1

Typical applications

- For general sine wave applications,mainly as motor run capacitors.

Terminals


- Double Fast-on:6.3 x 0.8mm

Technical data and specifications

Standart	IEC/EN 60252-1
Rated Capacitance C_N	1~150 μ F
Tolerance	$\pm 5\%$
Rated Voltage U_N	250v,370v,400v,450v
Rated Frequency f_N	50/60Hz
Maximun Ratings	
Maximun permissible voltage U_{max}	1.1* U_N (U_N :rated voltage)
Maximun Permissible current I_{max}	1.3* I_N (I_N :rated voltage)
Test data	
Ac test voltage terminal to terminal U_{tt}	2 x U_N ,60s
Insulation voltage terminals to case	2000 V_{ac}
Loss tangent $tg\delta$	≤ 0.002 (100Hz)
Climatic data	
Climatic category	40/85/21
Lower category T_{min}	-40 °C
Upper category T_{max}	+85 °C
Damp heat test	21days



CBB60-A

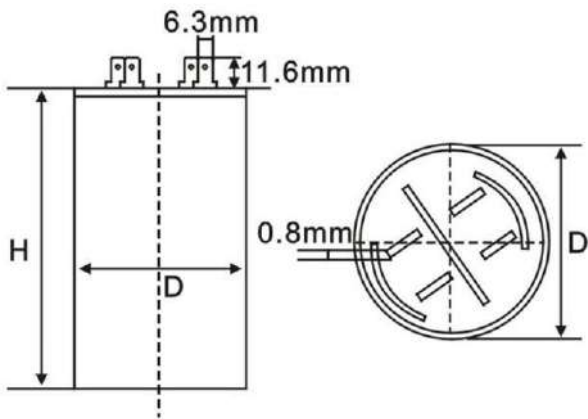

Specifications:

Capacitance	P/N	Voltage	D(mm)	H(mm)
1μF	LZB60-AV45C001S030050	450V	30	50
2.5μF	LZB60-AV45C002p5S030050	450V	30	50
3μF	LZB60-AV45C003S030050	450V	30	50
5μF	LZB60-AV45C005S030050	450V	30	50
6μF	LZB60-AV45C006S030050	450V	30	50
8μF	LZB60-AV45C008S035060	450V	35	60
10μF	LZB60-AV45C010S035060	450V	35	60
12μF	LZB60-AV45C012S035060	450V	35	60
15μF	LZB60-AV45C015S035070	450V	35	70
16μF	LZB60-AV45C016S040070	450V	40	70
18μF	LZB60-AV45C018S040070	450V	40	70
20μF	LZB60-AV45C020S040070	450V	40	70
25μF	LZB60-AV45C025S040070	450V	40	70
30μF	LZB60-AV45C030S045070	450V	45	70
35μF	LZB60-AV45C035S045092	450V	45	92
40μF	LZB60-AV45C040S045092	450V	45	92
50μF	LZB60-AV45C050S050092	450V	50	92
60μF	LZB60-AV45C060S050102	450V	50	102
70μF	LZB60-AV45C070S050122	450V	50	122
80μF	LZB60-AV45C080S055122	450V	55	122
90μF	LZB60-AV45C090S060122	450V	60	122
100μF	LZB60-AV45C100S060122	450V	60	122
120μF	LZB60-AV45C120S065122	450V	65	122
150μF	LZB60-AV45C150S065122	450V	65	122