




MODEL NO.3386

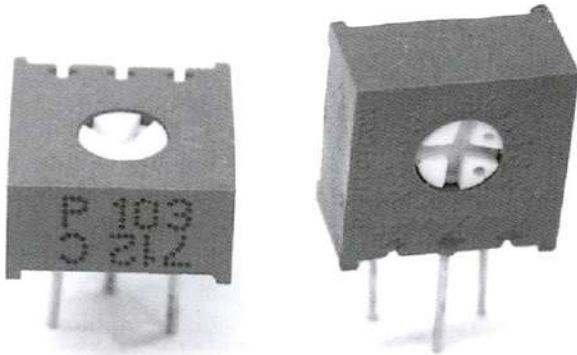

FEATURES :


- 3/8" Square Shape
- Cermet/ Industrial/ Sealed
- Single Turn with a Unique Centre Tapped
- Vertical/ Horizontal Adjust Types Available
- Available with Extended Shaft/ Cross-Slot Rotor
- Low PCB Profile (P/ F Models) - Only 1/5" High

HOW TO ORDER

	3386	P	-103
Model	_____	_____	_____
Style	_____	_____	_____
Resistance Code	_____	_____	_____

OUTLINE DRAWING & DIMENSIONS (mm)

Standard Resistance Table	
Resistance (Ω)	Resistance Code
50	500
100	101
200	201
500	501
1,000	102
5,000	202
10,000	502
20,000	103
50,000	203
100,000	503
200,000	104
500,000	204
1,000,000	504
2,000,000	105

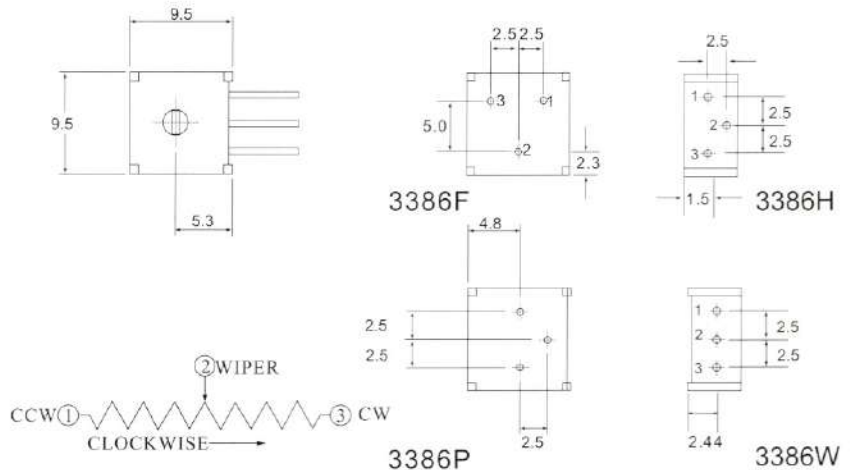

Electrical Characteristics

Power Rating0.5W @ 70°C
	0W @ 125°C
Resistance Range50 Ω ~ 1M Ω
Insulation Resistance1G Ω
Contact Resistance Variation1% or 20 Ω
End Resistance1% or 2 Ω
Max. Operating Voltage300V

Mechanical Characteristics

Effective Electrical Travel (Turns)270°
Rotational Torque \leq 35mNm

Environmental Characteristics

Operating Temperature Range	...-55 °C ~ +125 °C
Temperature Coefficient \pm 100ppm/°C