

规格书编号

SPEC NO :

产品规格书

SPECIFICATION

CUSTOMER 客户: _____
PRODUCT 产品: _____ CRYSTAL FILTER _____
MODEL NO 型号: _____ DCF49DIP-5M04C _____
PREPARED 编制: _____ LEO _____ CHECKED 审核: _____ YORK _____
APPROVED 批准: _____ LIUMING _____ DATE 日期: _____ 2014-8-7 _____

| | | |
|-------------------------|-------------|---------|
| 客户确认 CUSTOMER RECEIVED: | | |
| 审核 CHECKED | 批准 APPROVED | 日期 DATE |
| | | |

无锡市好达电子股份有限公司
Shoulder Electronics Limited

更改历史记录

History Record

| 更改日期 Date | 规格书编号 Spec No | 产品型号 Part No | 客户产品型号 Customer No | 更改内容描述 Modify Content | 备注 Remark |
|--------------|------------------|-----------------|-----------------------|--------------------------|--------------|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

SPECIFICATION SHEET

APPLICATION

This Standard Will Apply to The Quartz Crystals.

ELECTRICAL DATA

| NO | Speciality | Parameter |
|----|-----------------------|-----------------------|
| 01 | Holder type | DCF49DIP 6poles |
| 02 | Mode of Oscillations | Fundamental |
| 03 | Center Frequency | 5.000MHz |
| 04 | Pass bandwidth | ±2.0KHz min (at 3dB) |
| 05 | Pass band ripple | 2.0dB |
| 06 | Insertion loss | 4.0dB |
| 07 | Stop Band width | ±7.0KHz max (at 65dB) |
| 08 | Terminating impedance | 50 Ω |
| 09 | Operating Tem. Range | -20~+70℃ |
| 10 | Insulated Resistance | 500M Ω (max)(DC100V) |
| 11 | Aging per Year | ±3ppm |

SPECIFICATION SHEET

□ MECHANICAL DATA


| | |
|----------------------|---|
| 1. Marking: | <div style="border: 1px solid black; padding: 10px; width: fit-content; margin: auto;"> <p style="text-align: center;">SDE 5M04C</p> </div> |
| 2.Shock Test: | Dropping from 50 cm height,3 times on 30mm-thick- hard wood, After testing, the electrical data follows the requirement. |
| 3.Vibration Test: | 30 minutes in each direction 10 to 55 Hz, amplitude 0.75mm, After testing, the electrical data follows the requirement. |
| 4.Terminal strength: | <p>Tensile: Fix main body of crystal. Load 0.9kg pulling force along, terminal axial for 30±5 seconds. The terminal can not be pulled out or broken.</p> <p>Bending: Hang 450g object on lead terminal. Bend 90 degree for 2 to 3 seconds. Return to the former place with the same speed and then do it again oppositely. The down-lead does not become broken and loosed.</p> |
| 5.Sealing: | The crystal unit shall be immersed in alcohol for 5 minutes with 5kg pressure per cm ² .Taking out, Testing the resistance between down-lead and fundamental. The resistance shall be at least 500M Ω (max) (DC100V). |
| 6.Temperature cycle: | <p>2~3 min -20℃ to +70℃ 30min 30min</p> <p>After cycling three times, there is no distinct damage on the surface. Capacity testing requirement as vibration.</p> |

SPECIFICATION SHEET


□ MECHANICAL DATA

| | |
|---|--|
| <p>7.Solderability:</p> | <p>The lead(2to2.5mm from terminal to bottom) is immersed in a $230 \pm 5^{\circ}\text{C}$ Solder bath within 2 ± 0.5 seconds. The dipping surface of the lead shall be at least 95% covered with a Continuous new solder coating. Capacity testing requirement as vibration.</p> |
| <p>8. Resistance to soldering heat:</p> | <p>The(2 to 2.5mm from terminal to bottom) is immersed in a $350 \pm 10^{\circ}\text{C}$ solder bath within 3.5 ± 0.5 seconds. After testing, without distinct damage on the surface. Capacity testing requirement as vibration.</p> |
| <p>9. Resistance to heat:</p> | <p>Resistance to the lowest temperature: Stored at $-25 \pm 3^{\circ}\text{C}$ for 2 hours and then at normal temperature for 2 hours before testing. Capacity testing requirement as vibration. Resistance to the highest temperature: Stored at $70 \pm 2^{\circ}\text{C}$ for 2 hours and then at normal temperature for 2 hours before testing. Capacity testing requirement as vibration.</p> |
| <p>10. Invariable humidity:</p> | <p>Stored at $40 \pm 3^{\circ}\text{C}$ and RH93% $\pm 2\%$ for 48 hours and then at normal condition for 2 hours before testing. Without distinct damage to the surface. Capacity testing requirement as vibration.</p> |

Test Circuit

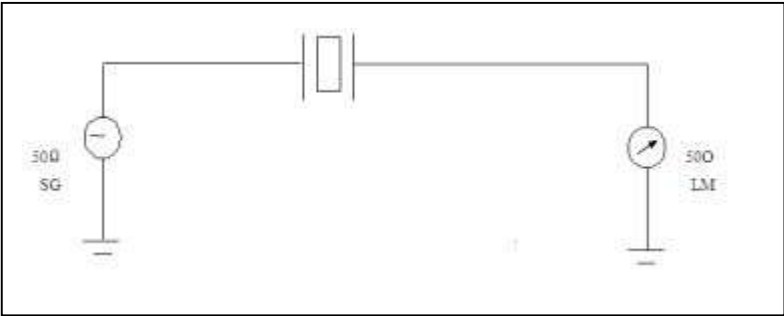

Dimension

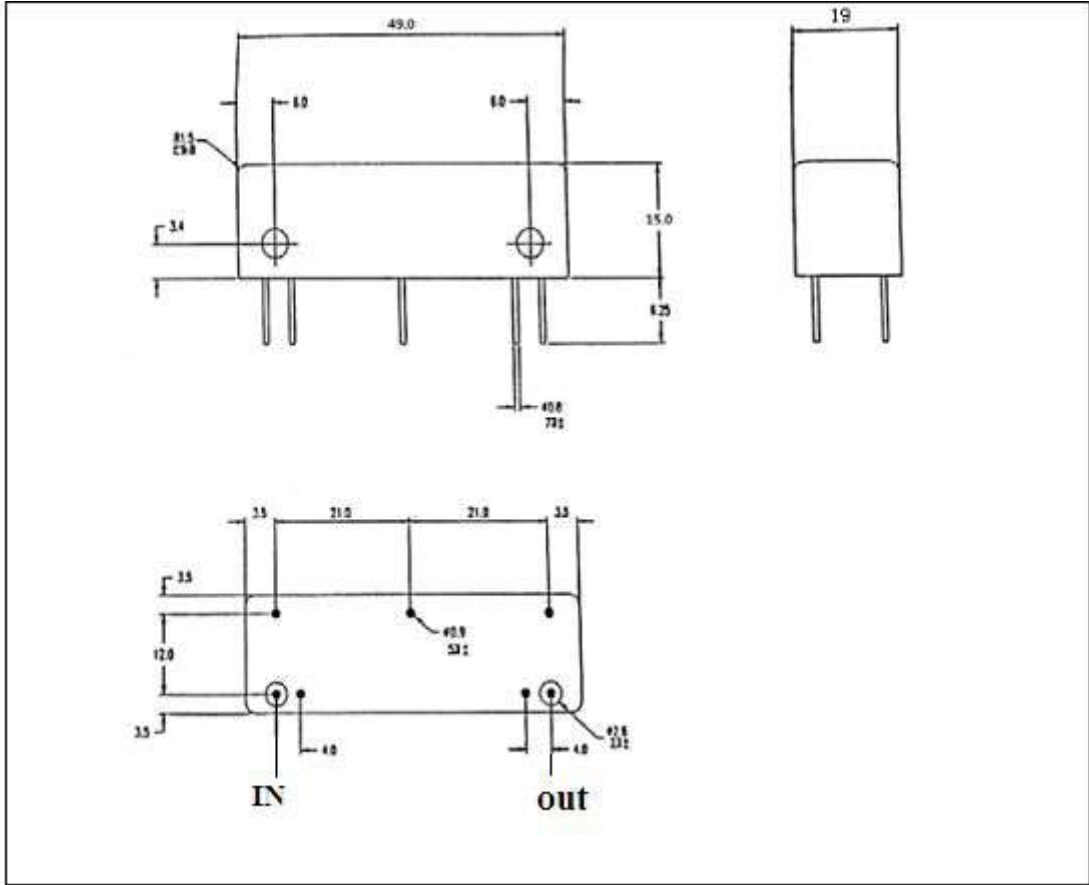

尺寸：49mm(长) *19mm (宽) *15mm(高)