



1 2 3 4 5 6 7 8

SPECIFICATION

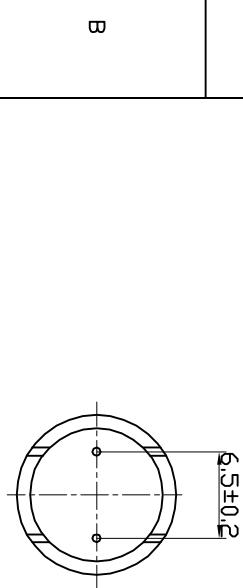


B


- 1.Rated Voltage 1.5V
- 2.Operating Voltage 2~7V
- 3.Max.Rated Current 30mA
- 4.Coil Resistance 16±2Ω
- 5.Coil Impedance 40Ω
- 6.Min.Sound Pressure Level 85dB/10cm
- 7.Resonant Frequency 2048Hz
- 8.Case Material/Color NORYL/Black
- 9.Operating Temperature -20~+60°C
- 10.Store Temperature -30~+70°C
- 11.Weight 2g

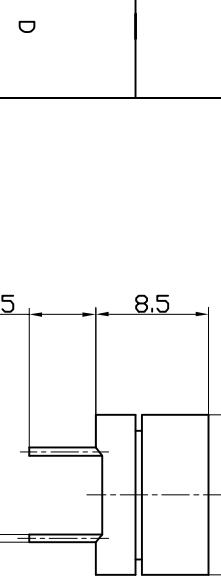

C



D



E

F

Compliance with ROHS

KEPo NINGBO KEPo ELECTRONIC CO.,LTD
<http://www.chinacoustic.com>

Magnetic Buzzer QUARTZ
DAPG1285A

F

1 2 3 4 5 6 7 8

NOTES	ANGLE PROJECTION	APPROVED	SCALE	NOT TO SCALE	SHLF	VER
X XX XXX 90 ANGLES 1°, NOTES 1°,	DRAWN CHECKED		mm UNIT mm	DWG NO. OEM1868R		1.0