

SMD CRYSTAL OSCILLATORS

7.0X5.0X1.3MM EAS7050XO SERIES




Features

- Small SMD seam sealed clock crystal oscillator units.
- High precision characteristic covering up to wide frequency range.
- Designed for automatic mounting and reflow soldering.
- Tri-State function available.
- Supply voltage range : 1.8 V ~ 5 V.
- High stability, low jitter, low power consumption.
- Main application : wireless communication, PC, and LCDM.
- RoHS Compliant / Pb Free.


Electrical Specifications

Item / Type	EAS7050XO		
Output Type	CMOS		
Output Load	15 pF	15 pF, 30 pF	15 pF, 50 pF
Oscillation Mode	Fundamental / 3rd Overtone		
Supply Voltage	1.8 V	2.5 V, 2.8 V, 3.3 V	5 V
Frequency Range	1 ~ 170 MHz		
Frequency Stability	± 20 ppm, ± 50 ppm		
Operating Temperature Range	$-10 \sim +70$ °C, $-40 \sim +85$ °C		
Storage Temperature Range	$-55 \sim +125$ °C		
Voltage Vol (Max.) / Voh (Min.)	0.1 VDD / 0.9 VDD		
Rise (Tr) / Fall (Tf) Time	8 ns Max.		
Supply Current	20 mA Max.		
Symmetry	40 ~ 55 %, 40 ~ 60 %		
Start-up Time	5 ms Max.		
Phase Jitter (12 KHz ~ 20 MHz)	1 ps Max.		
Aging (at 25 °C)	± 3 ppm / year Max.		

Dimensions

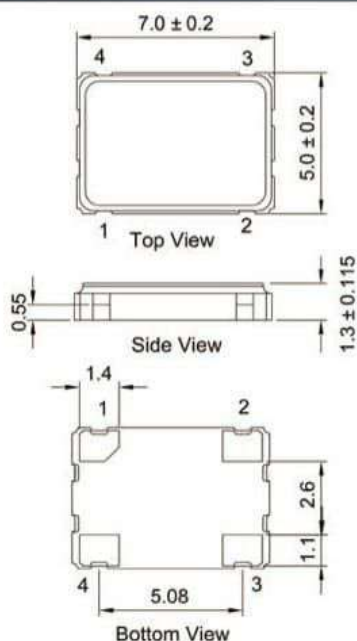

PAD FUNCTION:
 1: ENABLE CONTROL
 2: GND
 3: OUT
 4: VDD



Units: mm