

受 控

SPECIFICATION


1. SCOPE

This specification is applied to the piezo-element.

2. SPECIFICATION

(at 25°C)

2.1 Resonant Frequency	:	1.3 ± 0.5 KHz
2.2 Resonant Resistace	:	500 Ω max
2.3 Capacitance	:	60000 pF ± 30% at 100Hz
2.4 Input Voltage	:	30 Vp-p max
2.5 Operating Temperature	:	-20~+60°C
2.6 Storage Temperature	:	-30~+70°C
3. DIMENSION	:	as per figure

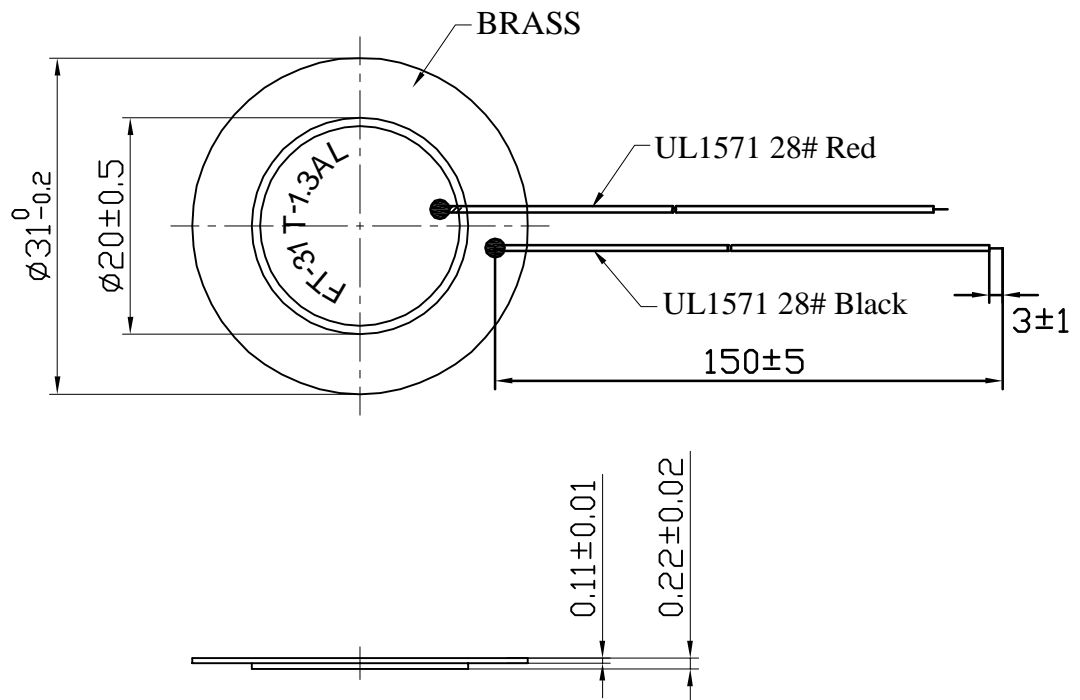

TOLERANCES UNLESS NOTED OTHERWISE .X ± .XX ± .XXX ± 90° FORMED +2° ANGLES -1°	DRAWN	汪逸	KEPO MODEL NO.	CUSTOMER				
	DESIGN		FT-31T-1.3AL150-880	QUARTZ-1				
	CHECKED			CUSTOMER NO.				
	APPROVED	徐锦生	DWG NO.					
	DATE	12.09.18	KCC880		VER	1.0	SCALE	
	CONTRACT NO.				UNIT	mm	SHEET	
FIRST ANGLE PROJECTION		AGENCY APPROVAL		KEPO CO.,LTD.		TEL:(+86)574-88370330 FAX:(+86)574-88370329		

1

2

3

4