

规格书编号

**SPEC NO: HDF1865ES6SP01**

# 产品规格书

# SPECIFICATION

CUSTOMER 客户: \_\_\_\_\_

PRODUCT 产品: \_\_\_\_\_ SAW FILTER

MODEL NO 型号: \_\_\_\_\_ HDF1865E-S6

PREPARED 编制: \_\_\_\_\_ CHECKED 审核: \_\_\_\_\_


APPROVED 批准: \_\_\_\_\_ D A T E 日期: \_\_\_\_\_ 2014-1-2

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司  
Shoulder Electronics Limited



## 1. Package Dimension

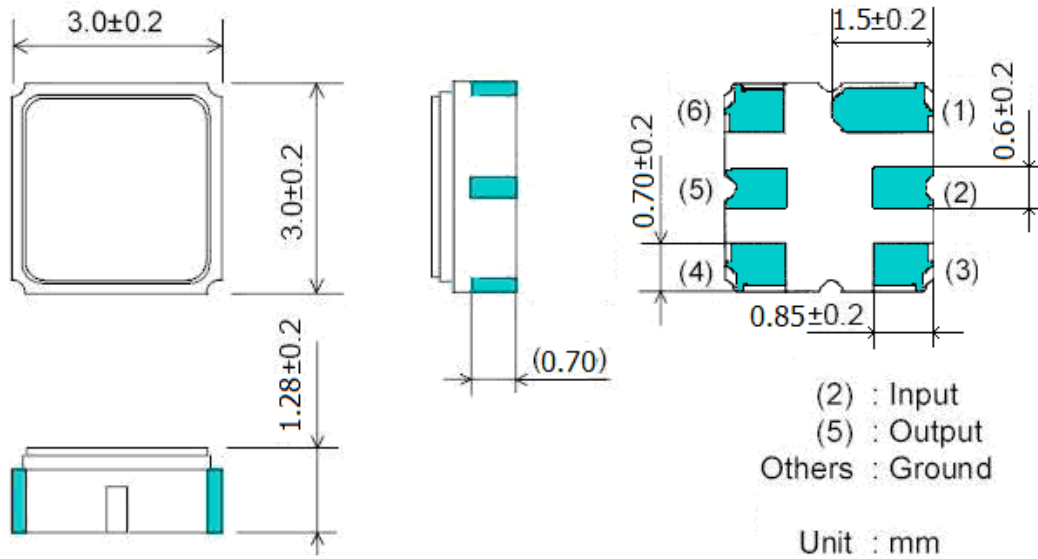

## 2. Performance


### 2.1 Maximum Rating

Items	Rating	unit
Maximum Working Power	10	dBm
Operating Temperature Range	-40 ~ +85	°C
Storage Temperature Range	-40 ~ +85	°C

### 2.2 Electronic Characteristics

	Unit	Minimum	Typical	Maximum
Center Frequency $F_c$	MHz	-	1865	-
Insertion Loss (In 1850~1880 MHz )	dB		2.5	3.5
Ampiltude Ripple (In 1850~1880 MHz )	dB		0.5	1.5
VSWR (In 1850~1880 MHz )			1.5	2.0
Attenuation				
DC~1800 MHz	dB	25	35	-
1940~3000 MHz		25	35	
Input/Output Impedance	Ohms		50	

2.3 Frequency Characteristics

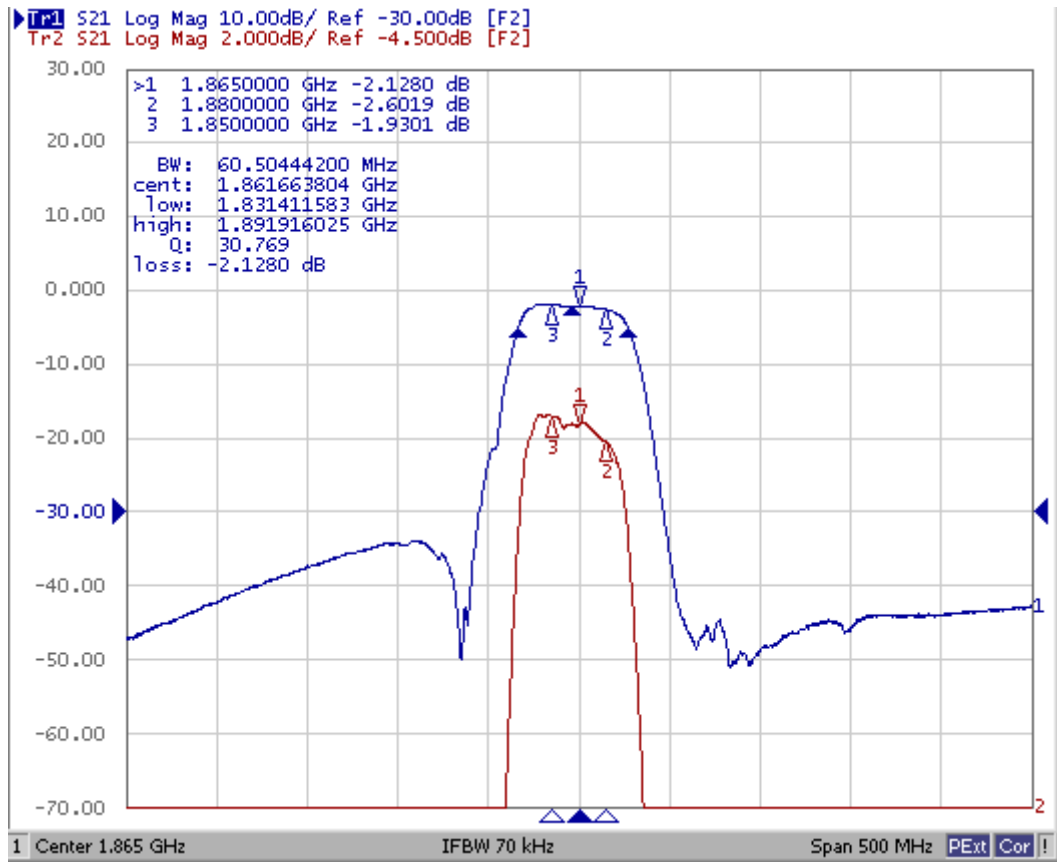

3. Test Circuit

