

Specification for Speaker	Page	2/9
Model No. : KP2030SP2F800-6724	Revision No.	1.0
	Drawing No.	KFC6724

## CONTENTS

1. Scope
2. General
3. Electrical and Acoustic Characteristics.
4. Reliability Test
5. Measurement Block Diagram & Response curve
6. Structure
7. Dimensions
8. Packing
9. Revision

Specification for Speaker		Page	3/9
Model No.	: KP2030SP2F800-6724	Revision No.	1.0
		Drawing No.	KFC6724

## 1. Scope

This specification is applied to the dynamic speaker which is used all of the electrical acoustic product.

-- compact, rich sound

-- applications: mobile phone, PDA, notebook computer, GPS, etc. ...

## 2. General

2.1 Out-Diameter : 20 mm

2.2 Height : 4 mm

2.3 Weight : 2.2 g

2.4 Operating Temperature range:

-20 ~+70 °C without loss of function

2.5 Store Temperature range:

-30 ~+85 °C without loss of function

## 3. Electrical and Acoustic Characteristics.


Test condition : 15 ~ 35 °C, 25% ~ 85% RH, 860~1060 mbar

No	Items	Specification
1	Impedance	8 Ω ± 15% (1Vrms at 1KHz)
2	Sound Pressure Level	90 dB ± 3dB (0.1w/0.1m at 1KHz)
3	Resonance Frequency	800 Hz ± 20%
4	Frequency Range	Fo ~20KHz
5	Input Power	Rated 0.8 W / Max. 1 W
6	Distortion	10% Max. at 1kHz/2.53Vrms
7	Buzz and Rattle	Should not be audible buzzes, rattles when the 2.53V sine wave signal swept at frequency range.
8	Polarity	When supplied plus D.C. voltage to (+) terminal, the cone diaphragm must move to forward.

Specification for Speaker		Page	4/9
Model No.	: KP2030SP2F800-6724	Revision No.	1.0
		Drawing No.	KFC6724

## 4. Reliability Test

After test(1~7item), the speaker S.P.L . difference shall be within  $\pm 3$ dB, and the appearance not exist any change to be harmful to normal operation (e.g. cracks,rusts,damages and especially distortion).

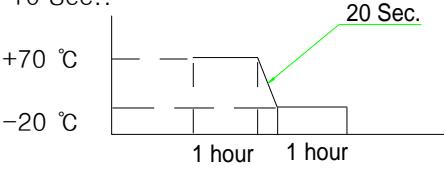No	Items	Specification
1	High Temperature Test	After being placed in a chamber with $+85 \pm 3$ °C for 96 hours and then being placed in natural condition for 1 hour, speaker shall be measured.
2	Low Temperature Test	After being placed in a chamber with $-30 \pm 3$ °C for 96 hours and then being placed in natural condition for 1 hour, speaker shall be measured.
3	Humidity Test	After being placed in a chamber with 85 to 90%R.H. at $+40 \pm 2$ °C for 96 hours and then being placed in natural condition for 1 hour, speaker shall be measured.
4	Thermal Shock Test	After being placed in a chamber at $+70$ °C for 1 hour, then speaker shall be placed in a chamber at $-20$ °C for 1 hour(1 cycle is the below diagram). After 4 above cycles, speaker shall be measured after being placed in natural condition for 10 Sec.. 
5	Vibration Test	After being applied vibration of amplitude of 1.5mm with 10 to 55Hz band of vibration frequency to each of 3 perpendicular directions for 1 hour, then placed in natural condition for 1 hour, speaker shall be measured.
6	Drop Test	The speaker when mounted in the jig which weight 85g~100g, shall with stand 15 times random drops from a height of 1.5 meter to a concrete floor faced with 5mm thick hard wood board.and be nothing mechanical damage.
7	Load test	After being applied loading white noise with input power 0.8W(2.53Vrms.) for 96 hours, then placed in natural condition for 1 hour, speaker shall be measured.
8	Insulation test	When they are measured with DC 100V the insulation resistance between v.c. terminal and frame must be more than 1 MΩ


# Specification for Speaker

Page 5/9


Revision No. 1.0

Drawing No. KFC6724

## 5. Measurement Block Diagram & Response curve



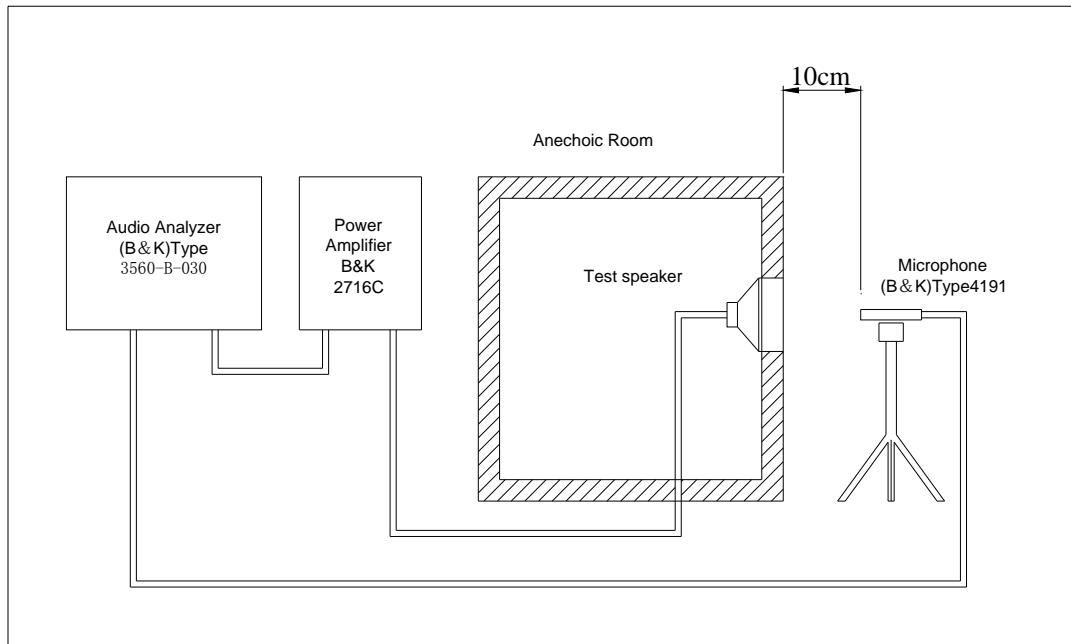


## 6. Structure

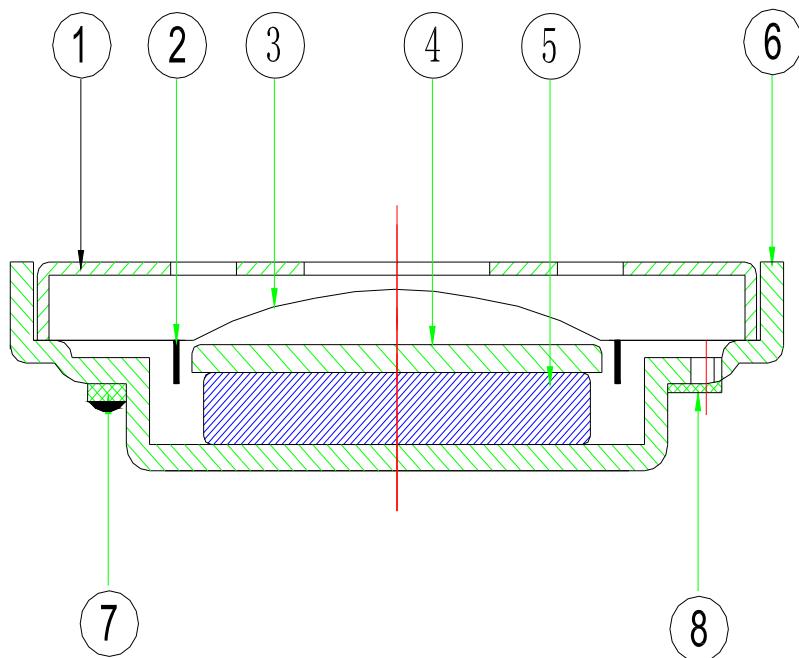


No.	Part Name	Q'ty	Material	Remarks
8	Screen	1	120# Net	
7	Terminal	1	Epoxy PCB	
6	Frame	1	SPCC	
5	Magnet	1	Nd-Fe-B	
4	Plate	1	SPCC	
3	Diaphragm	1	PEN	
2	Voice Coil	1	Copper	
1	Cap	1	SPCC	

## 7. Dimensions

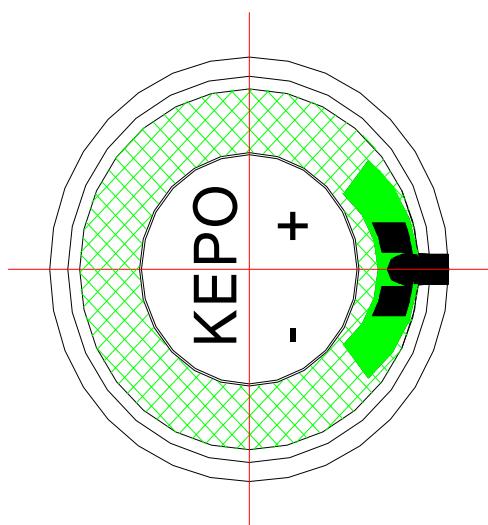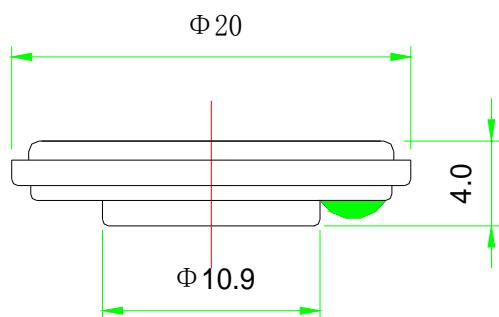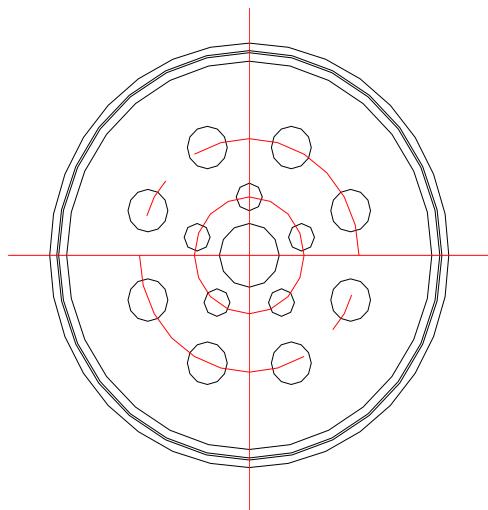


FIRST ANGLE PROJECTION





UNIT : mm

Tolerance :  $\pm 0.2$

## 8. Packing

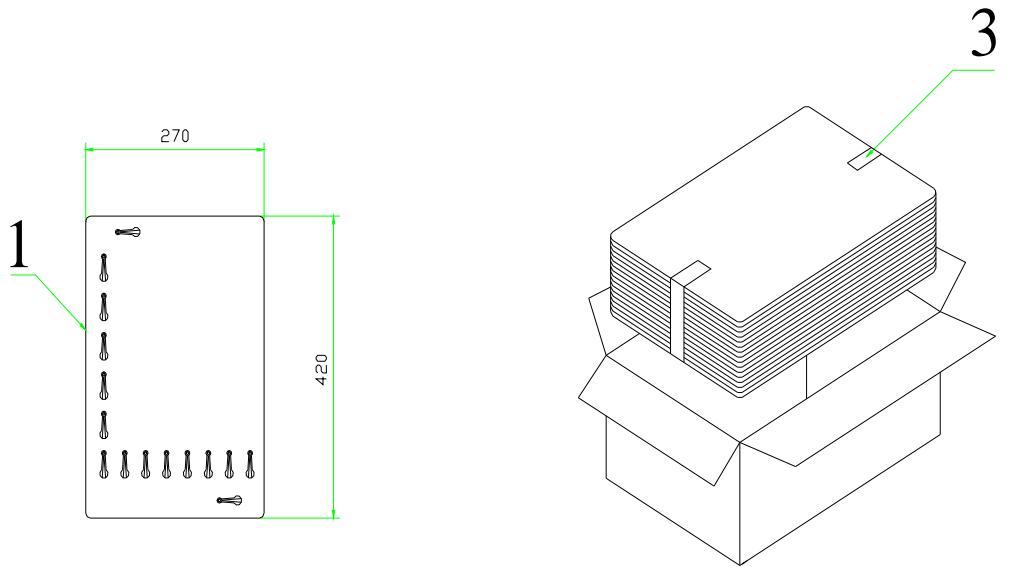

100Pcs

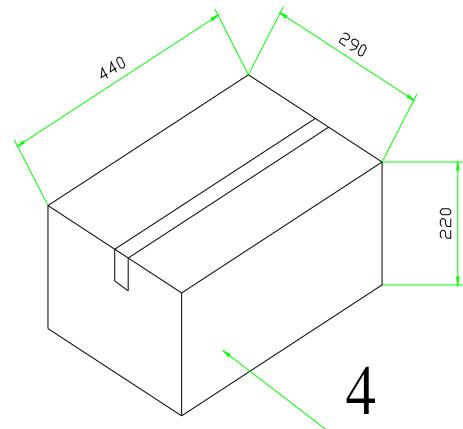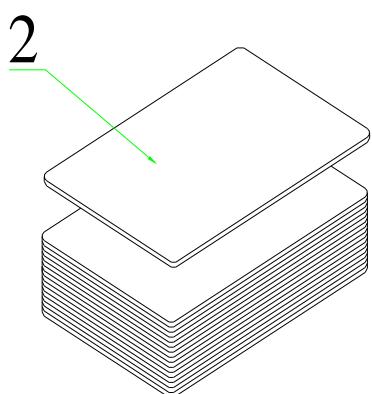

4

QTY: 2000Pcs

440 x290 x220