


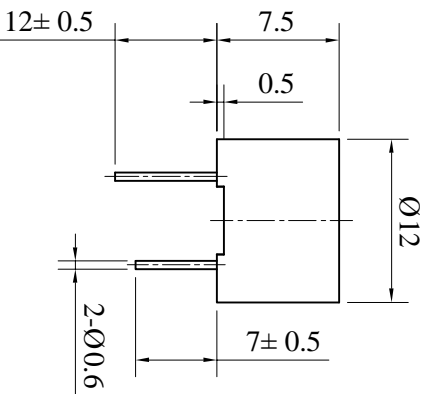


# SPECIFICATION

- 1. Rated Voltage ..... 1.8 VDC
- 2. Operating Voltage ..... 1.6~3 VDC
- 3. Max. Rated Current ..... 20mA/1.8VDC
- 4. Min. Sound Pressure Level ..... 75dB/10cm
- 5. Resonant Frequency ..... 3100±500Hz
- 6. Response Time ..... 50ms
- 6. Case Material ..... PBT
- 7. Operating Temperature ..... -20~+70°C
- 8. Store Temperature ..... -30~+80°C
- 9. Weight ..... 2g



红金色



No.		DESCRIPTION		APPROVED		DATE		<b>KEPO</b> NINGBO KEPO ELECTRONIC CO.,LTD <a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a>	
FORMING		APPROVALS		DATE		DATE			
DRAWN		CHECKED		APPROVED		DATE		UNIT: mm SCALE: NOT TO SCALE DWGNO: KP3,840,716 SHEET: 1.1	
FIRST ANGLE ISOMETRIC		APPROVED		DATE		DATE			