
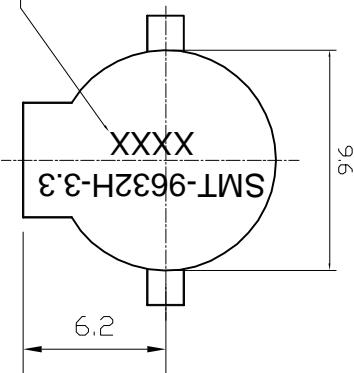
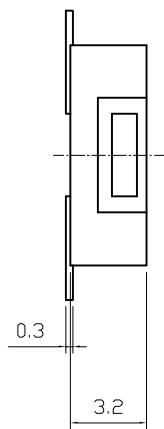


卷之三

SPECIFICATION

- | | |
|----------------------------------|----------------|
| 1.Rated Voltage | 3.3V |
| 2.Operating Voltage | 2~4V |
| 3.Resonant Frequency | 273Hz |
| 4.Min.Sound Pressure Level | 85dB at 10cm |
| 5.Coil Resistance | $16\pm4\Omega$ |
| 6.Max.current Consumption | 120mA |
| 7.Operating Temperature | -25~+70°C |
| 8.Store Temperature | -30~+80°C |
| 9.Weight | 3.5g |

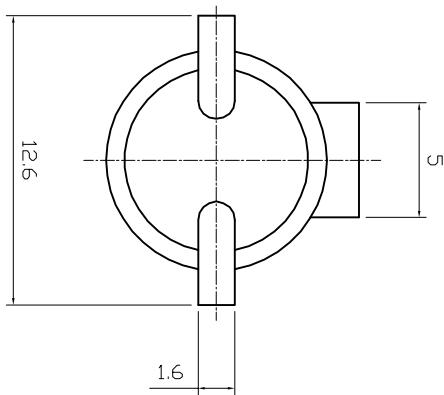

Date

				<i>KEPO</i> NINGBO KEPOL ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
				Magnetic Buzzer SMT-9032H-3.3	
No.	DESCRIPTION	APPROVED	DATE		
TOLERANCE/NOMINAL	APPROVALS	DATE			
XX ± XX = XXX ± XXX = 90 ANGLE 1°	LH	07.10.27	UNIT mm	DWG NO KP3.840.895.01	
FIRST ANGLE PROJECTION	APPROVED		SCALE NOT TO SCALE	SHEET 1	VER 1.0

KEPO NINGBO KEPO ELECTRONIC CO.,LTD
<http://www.chinaacoustic.com>

下

四

1

2

2

A

1

1

8

四

1