


SPECIFICATION

1. Resonant Frequency 1.3 ± 0.5 kHz
2. Static Capacitance $50000 \pm 30\%$ (pF) at 100 Hz
3. Resonant Impedance 500Ω Max
4. Operating Voltage 30 Vp-p max
5. Operating Temperature -20 to $+70$ ($^{\circ}\text{C}$)
6. Storage Temperature -30 to $+80$ ($^{\circ}\text{C}$)
7. Metal Material Brass

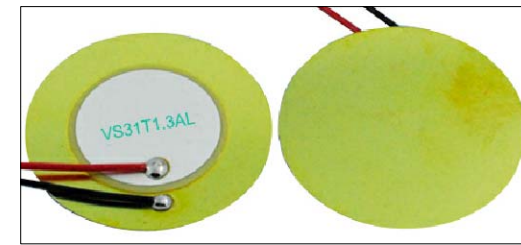

技术要求:

- 1, 焊锡焊盘的尺寸中最大为2毫米。
- 2, 产品符合欧盟环保要求。

			NINGBO VOISE ELECTRONICS CO.,LTD http://www.nbvoise.com	
No.	DESCRIPTION	APPROVED	DATE	Piezoelectric Element VS31T1.3AL105
TOLERANCES UNLESS NOTED OTHERWISE: .X ± .XX ± .XXX ± 90° FORMED +2° ANGLES -1°		APPROVALS	DATE	
FIRST ANGLE PROJECTION		CHECKED		UNIT mm DWG NO. VS20220606012
		APPROVED	22.06.06	SCALE SHEET VER 1.0