

SPECIFICATION

FOR APPRONAL

Customer : _____

Product Name : Piezo Buzzer(Self-drive) _____

Model Name : VSI2725LPF11 _____

Drawing No. : VS20191012019 _____

Signature of Voice

Approved by	Checkde by	Issued by	Date

 **福爱斯电子有限公司**
VOISE ELECTRONICS CO.,LTD.

Address:No 96 Mogao Dongqian Lake Industial Area ningbo,China,
Tel:0086-0574-87773030;Fax:0086-0574-87471600 P.C.315121
<http://www.nbvoise.com> Email:sales@nbvoise.com

Specification for Piezo Buzzer(Self-drive)	Page	2/5
	Revision No.	1.0
	Drawing No.	VS20191012019

Model No.: VSI2725LPF11

Table of contents

- 1. Revision
- 2. Scope
- 3. General Characteristics
- 4. Electrical and Acoustic Characteristics.
- 5. Dimensions
- 6. Packing

1. Revision

Rev.No.	Date	Page	Description of Revision
1.0	2019/10/12		Preliminary

Specification for Piezo Buzzer(Self-drive)

Page

3/5

Revision No.

1.0

Model No. : VSI2725LPF11

Drawing No.

VS20191012019

2. Scope

This specification is applied to the piezo buzzer used for sounder in alarm systems, Please contact us when using this product for any other applications than described in the above.


3. General

- 3.1 Out-Diameter : 30 mm
- 3.2 Height : 25 mm
- 3.3 Weight : 20 ±1g
- 3.4 Operating Temperature range:
-20~+60°C without loss of function
- 3.5 Store Temperature range:
-30~+70°C without loss of function

4. Electrical and Acoustic Characteristics.

Test condition : 15 ~ 35 °C, 25% ~ 85% RH, 860~1060 mbar

No	Items	Specification
1	Rated Voltage	12V DC
2	Working Voltage	6-30 V DC
3	Max Rated Current	20mA/12VDC
4	Min Sound Pressure Level	92dB/12VDC/30cm
5	Resonant Frequency	2.8±0.3KHz
6	Tone Nature	Fast Pulse (1sound/ 1sec)
7	Housing Material	ABS
8	Color	Black

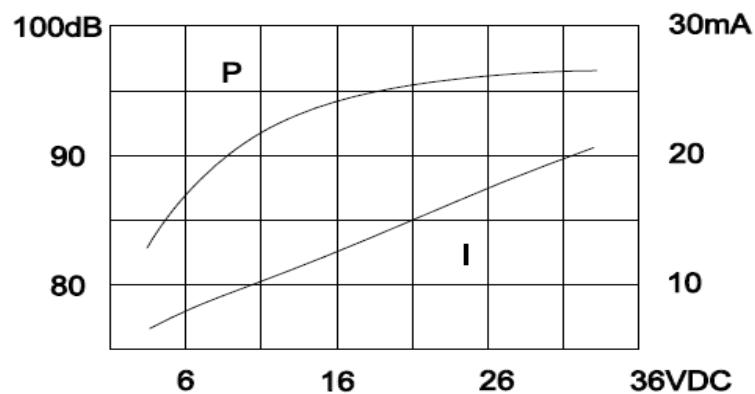

Specification for Piezo Buzzer(Self-drive)

Page

4/5

Revision No.

1.0

Model No. : VSI2725LPF11


Drawing No.

VS20191012019

5. Dimensions



VSI2725LPF11
DC:6-30V

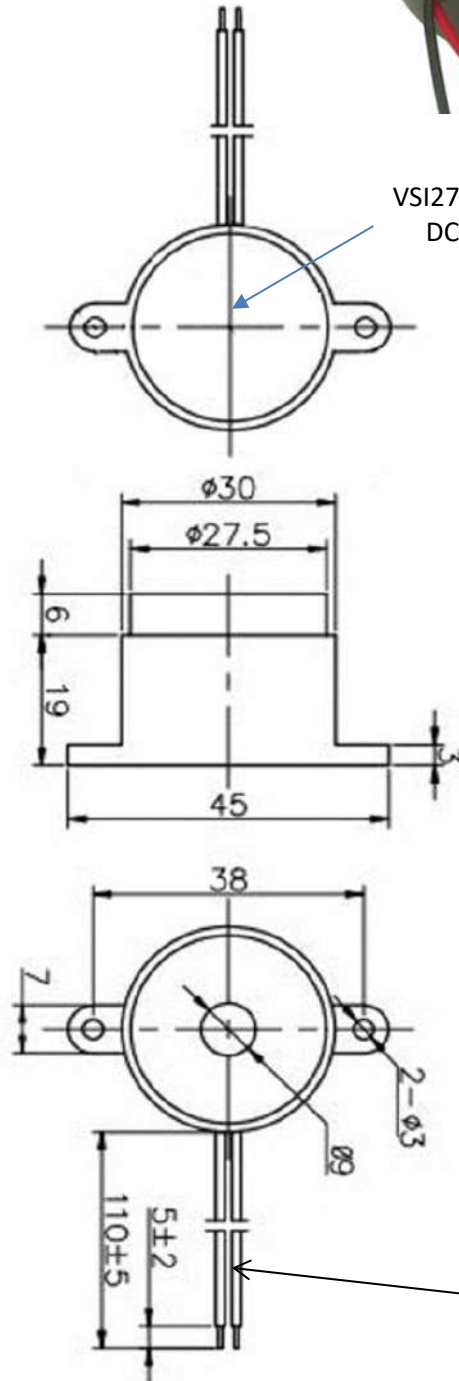

UL 1007 28# Red/Black

FIRST ANGLE PROJECTION



UNIT : mm

Tolerance : ±1.5