SPECIFICATION

FOR APPRONAL

Customer :

Product Name : Mechanical Buzzer

Model Name : VSMB2315L

Drawing No. : VS20190826021

Signature of Voise

Approved by	Checkde by	Issued by	Date



Office Add: Haoyangguang B-302# No.968 Baizhang Road, Ningbo China Factory add: Shishan Industrial Park Moushan Town Yuyao City China Tel:86-0574-87471601 Fax:86-0574-87471603 P.C.315000 Http://www.nbvoise.com E-mail:sales@nbvoise.com

Specification for Mechanical Buzzer	Page	2/5
-	Revision No.	1.0
Model No.: VSMB2315L	Drawing No.	VS20190826021

Table of contents

- 1. Revision
- 2. Scope
- 3. General Characteristics
- 4. Electrical and Acoustic Characteristics.
- 5. Dimensions
- 6. Packing

1. Revision

Rev.No.	Date	Page	Description of Revision
1.0	2019/8/26		Preliminary

Specification for Mechanical Buzzer	Page	3/5
	Revision No.	1.0
Model No. : VSMB2315L	Drawing No.	VS20190826021

2. Scope

This specification is applied to the siren used for sounder in alarm systems, Please contact us when using this product for any other applications than described in the above.

3. General

3.1 Out-Diameter : 23 mm
 3.2 Height : 15 mm
 3.3 Weight : 10 ±3g

3.4 Operating Temperature range:

-20~+60°C without loss of function

3.5 Store Temperature range:

-30~+70°C without loss of function

4. Electrical and Acoustic Characteristics.


Test condition : 15 ~ 35 $^{\circ}$ C, 25% ~ 85% RH, 860~1060 mbar

No	Items	Specification
1	Rated Voltage	1.5V DC
2	Working Voltage	1-3VDC
3	Max Rated Current	3mA/1.5VDC
4	Min Sound Preesure Level	75dB/1.5VDC/20cm
5	Resonant Frequency	400±100Hz
6	Housing Material	ABS
7	Color	Black

Specification for Mechanical Buzzer	Page	4/5
•	Revision No.	1.0
Model No. : VSMB2315L	Drawing No.	VS20190826021

5. Dimensions



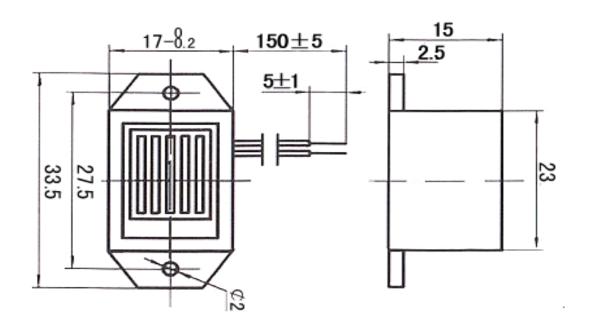

FIRST ANGLE PROJECTION



UNIT : mm
Tolerance : ±1.5

Specification for Mechanical Buzzer	Page	5/5
	Revision No.	1.0
Model No. : VSMB2315L	Drawing No.	VS20190826021

6. Packing

Each minimum package unit of products shall be in a carton box and it shall be clearly marked with Part Number ,quantity and outgoing inspection number.

There shall be no mechanical damage on products during in storage.

Total:200 pcs per box Size:41.5x27x31cm