

Technical Data Sheet

0603 Package Chip LED (0.4mm Height)

19-217/W1D-APQHY/3T

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.

Descriptions


- The 19-217 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications


- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.



Part No.	Chip		Lang Colon	
rait No.	Material	Emitted Color	Lens Color	
19-217/W1D-APQHY/3T	InGaN	Pure White	Yellow Diffused	



Package Outline Dimensions

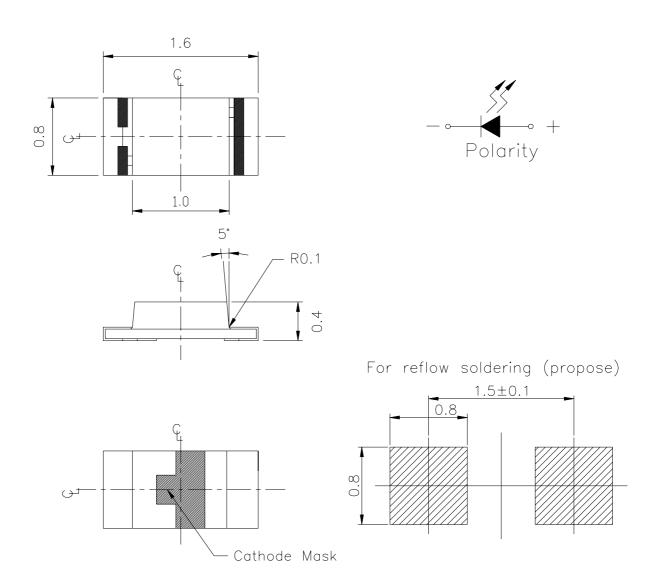

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm



EVERLIGHT ELECTRONICS CO.,LTD.

19-217/W1D-APQHY/3T

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	IF	25	mA
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!\mathbb{C}$
Soldering Temperature	Tsol	260 (for 5 seconds)	$^{\circ}\!\mathbb{C}$
Electrostatic Discharge	ESD	150	V
Power Dissipation	Pd	110	mW
Peak Forward Current (Duty 1/10 @1KHz)	IFP	100	mA

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	Iv	45.0		112.0	mcd		
Viewing Angle	2 θ 1/2		130		deg	IF=5mA	
Forward Voltage	VF	2.70		3.15	V		
Reverse Current	Ir			50	μ A	V _R =5V	

Bin Range Of Luminous Intensity & Forward Voltage

_						
	Symbol	Bin Code	Min.	Max.	Unit	Condition
	-	P	45.0	72.0	1	
Iv	Q	72.0	112.0	mcd		
	VF	15	2.70	2.85		IF=5mA
		16	2.85	3.00	V	
		17	3.00	3.15		

Notes:

- 1.Tolerance of Luminous Intensity ±10%
- 2.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1.0 Page: 3 of 11

Device No:DSE-197-W01 Prepared date: 08-06-2004 Prepared by: Jessica Chang



Chromaticity Coordinates Specifications for Bin Grading

Groups	Bin Code	CIE_x	CIE_y	Condition
		0.274	0.226	
	1	0.274	0.258	
	1	0.294	0.286	
		0.294	0.254	
		0.274	0.258	
	2	0.274	0.291	
	2	0.294	0.319	
		0.294	0.286	
		0.294	0.254	
	3	0.294	0.286	
	3	0.314	0.315	
A		0.314	0.282	IF= 5mA
A	A	0.294	0.286	IF= SIIIA
	4	0.294	0.319	
	4	0.314	0.347	
		0.314	0.315	
		0.314	0.282	
	5	0.314	0.315	
	3	0.334	0.343	
		0.334	0.311	
		0.314	0.315	
	6	0.314	0.347	
	U	0.334	0.376	
		0.334	0.343	


Notes:

- 1.The C.I.E. 1931 chromaticity diagram (Tolerance ±0.01).
- 2. The products are sensitive to static electricity and care must be fully taken when handling products.


Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1.0 Page: 4 of 11


Device No:DSE-197-W01 Prepared date: 08-06-2004 Prepared by: Jessica Chang


CIE Chromaticity Diagram

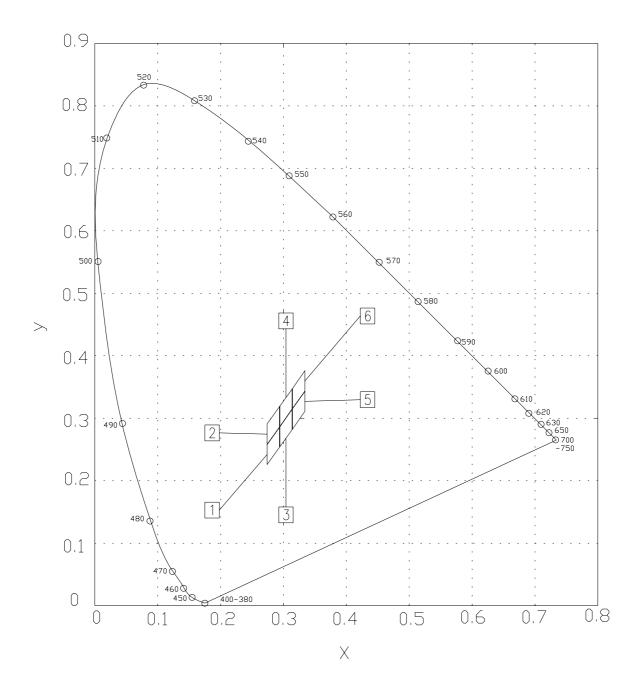



Typical Electro-Optical Characteristics Curves
















Label explanation

CAT: Luminous Intensity Rank HUE: Chromaticity Coordinates REF: Forward Voltage Rank

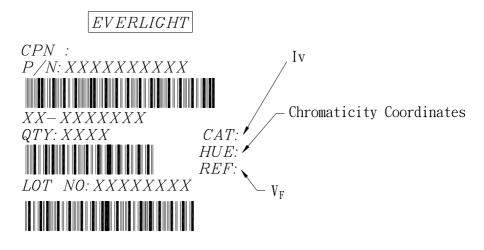

MADE IN TAIWAN

Reel Dimensions

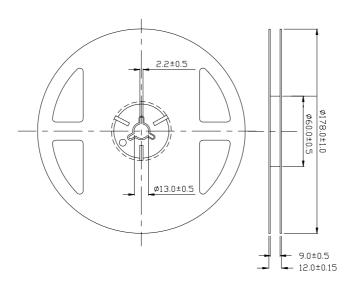

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No:DSE-197-W01

http://www.everlight.com


Rev 1.0

Page: 7 of 11

Prepared date: 08-06-2004 Prepared by: Jessica Chang




Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

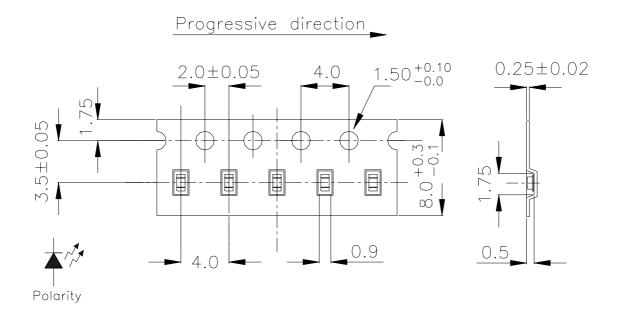

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

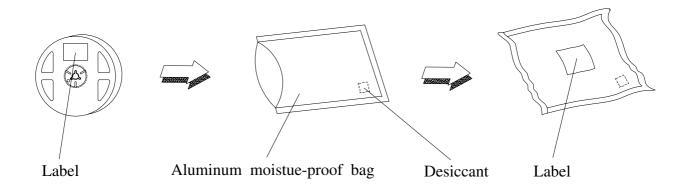

Everlight Electronics Co., Ltd. Device No:DSE-197-W01

http://www.everlight.com

Prepared date: 08-06-2004

Rev 1.0

Page: 8 of 11

Prepared by: Jessica Chang



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min \int 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°ℂ	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. Device No:DSE-197-W01

http://www.everlight.com

Rev 1.0

Page: 9 of 11

Prepared date: 08-06-2004 Prepared by: Jessica Chang


Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30° C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

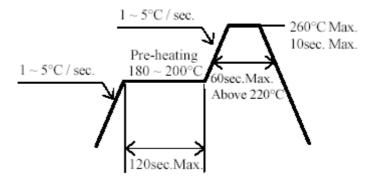

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd.

Device No:DSE-197-W01

http://www.everlight.com

Rev 1.0

Page: 10 of 11

Prepared date: 08-06-2004 Prepared by: Jessica Chang




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 280°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

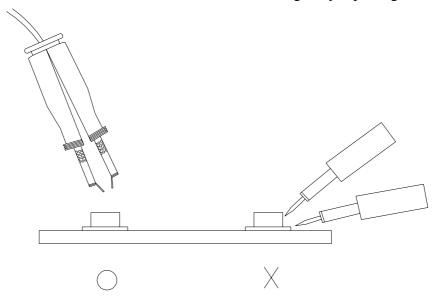

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1.0 Page: 11 of 11

Device No:DSE-197-W01 Prepared date: 08-06-2004 Prepared by: Jessica Chang