

规格书编号

SPEC NO :

# 产品规格书

# SPECIFICATION

CUSTOMER 客户: \_\_\_\_\_  
PRODUCT 产品: SAW FILTER  
MODEL NO 型号: HDQSF45A4Dc SIP5Dc  
PREPARED 编制: \_\_\_\_\_ CHECKED 审核: \_\_\_\_\_  
APPROVED 批准: \_\_\_\_\_ D A T E 日期: 2008-5-28

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司  
Shoulder Electronics Limited

# 更改历史记录 History Record

更改日期 Date	规格书编号 Spec. No.	产品型号 Part No.	客户产品型号 Customer No.	更改内容描述 Modify Content	备注 Remark

**1.SCOPE**


SHOULDER’s SAW filter series have broad line up products meeting all broadcast standard including NTSC,PAL and SECAM systems. These filters are composed of two interdigital transducers on a single-crystal, piezoelectrical chip. they are used in electronic equipments such as TV and so on.

**2.Construction**


**2.1 Dimension and materials**

Manufacturer’s name : SHOULDER ELECTRONICS LTD

Type : QSF45A4Dc

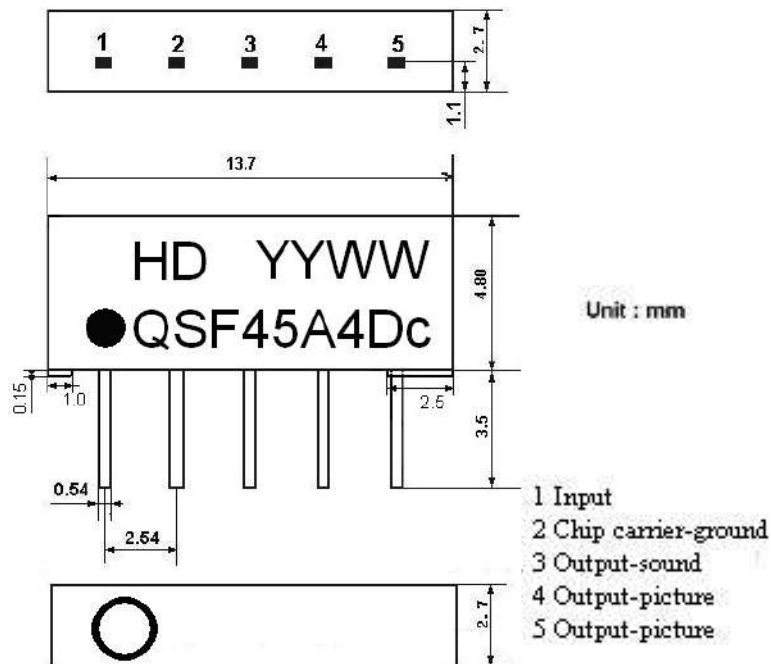

YY:year  
WW:week

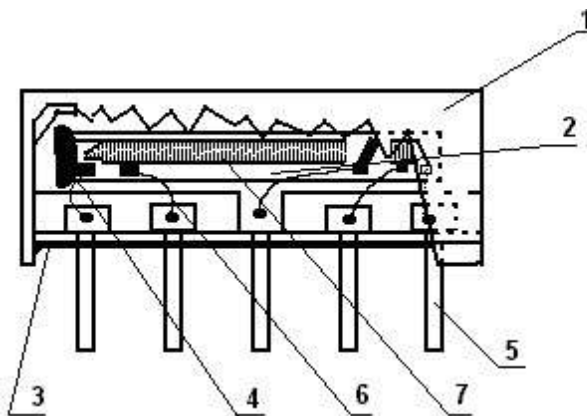

Components	Materials
1.Outer casing	PPS
2.Substrate	Lithium niobate
3.Base	Epoxy resin
4.Absorber	Epoxy resin
5.Lead	Cu alloy+Au plate
6.Bonding wire	AlSi alloy
7.Electrode	Al

### 3.Characteristics

Items	Conditions	Specifications
Standard atmospheric conditions	Unless otherwise specified , the standard rang of atmospheric conditions for making measurements and tests is as follows; Ambient temperature : 15°C to 35°C Relative humidity : 25% to 85% Air pressure : 86kPa to 106kPa	There shall be no damage.
Operating temperature rang	Operating temperature rang is the rang of ambient temperatures in which the filter can be operated continuously. -20°C ~ +60°C	
Storage temperature rang	Storage temperature rang is the rang of ambient temperatures at which the filter can be stored without damage. Conditions are as specified elsewhere in these specifications. -40°C ~ +70°C	
Reference temperature	+25°C	

#### 3.1 Maximum Rating

<b>DC voltage</b>	<b>VDC</b>	<b>12</b>	<b>V</b>	<b>Between any terminals</b>
<b>AC voltage</b>	<b>Vpp</b>	<b>10</b>	<b>V</b>	<b>Between any terminals</b>

#### 3.2 Electrical Characteristics

##### Characteristics of picture channel

Source impedance

$$Z_s=50 \Omega$$

Load impedance

$$Z_L=2k \Omega //3pF$$

$$T_A=25^\circ C$$

Item	Freq	min	typ	max	
Insertion attenuation Reference level	44.06MHz	11.7	13.7	15.7	dB
<b>Relative attenuation</b>	45.81MHz	4.4	5.9	7.4	dB
	42.23MHz	0.7	2.2	3.7	dB
	41.31MHz	26.0	40.0	-	dB
	39.81MHz	43.0	56.0	-	dB
	47.31MHz	41.0	52.0	-	dB

Sidelobe	35.06~39.81MHz	37.0	48.0		dB
	47.31~55.06MHz	35.0	43.0		dB
<b>Group delay ripple (p-p)</b>		-	50	-	ns
Temperature coefficient		-72			ppm/k

**Characteristics of sound channel**

Source impedance

 $Z_s=50\ \Omega$ 

Load impedance

 $Z_L=2k\ \Omega //3pF$ 
 $T_A=25^\circ C$ 

	Freq	min	typ	max	
<b>Insertion attenuation</b>					dB
Reference level	41.31MHz	10.9	12.9	14.9	
Relative attenuation	42.23MHz	15.0	25.0	-	dB
	45.81MHz	30.0	41.0	-	dB
	39.81MHz	25.0	45.0	-	dB
	47.31MHz	30.0	42.0	-	dB
<b>Sidelobe</b>	35.06~39.81MHz	22.0	32.0		dB
	47.31~55.06MHz	28.0	35.0		dB
Temperature coefficient		-72			ppm/K

**3.3 Environmental Performance Characteristics**

Item	Condition	Specifications						
High temperature	The specimen shall be store at a temperature of $80\pm 2^\circ C$ for $96\pm 4h$ . Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.	Mechanical characteristics and specifications in electrical characteristics shall be satisfied. There shall be no excessive change in appearance.						
Low temperature	The specimen shall be store at a temperature of $-20\pm 3^\circ C$ for $96\pm 4h$ . Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.							
Humidity	The specimen shall be store at a temperature of $40\pm 2^\circ C$ with relative humidity of 90% to 96% for $96\pm 4h$ . Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.							
Thermal shock	The specimen shall be subjected to 8 continuous cycles each as shown below. Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.							
	<table border="1"> <thead> <tr> <th></th> <th>Temperature</th> <th>Duration</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>+25\ ^\circ C \Rightarrow -40\ ^\circ C</math></td> <td>0.5h</td> </tr> </tbody> </table>		Temperature	Duration	1	$+25\ ^\circ C \Rightarrow -40\ ^\circ C$	0.5h	
	Temperature	Duration						
1	$+25\ ^\circ C \Rightarrow -40\ ^\circ C$	0.5h						


	2	-40 °C	4h	
	3	-40 °C=>+85 °C	2h	
	4	+85 °C	4h	
	5	+85 °C=>+25 °C	0.5h	
	6	+25 °C	1h	
Resistance to Soldering heat	<p>Reflow soldering method                      Peak: 255 ±5 °C, 220 ±5 °C, 40s                      At electrode temperature of the specimen.</p> <p>The specimen shall be passed through the reflow furnace with the condition shown in the above profile for 1 time.                      The specimen shall be stored at standard atmospheric conditions for 1h, after which the measurement shall be made. Test board shall be 1.6 mm thick. Base material shall be glass fabric base epoxy resin.</p>			
Solder ability	Immerse the pins melt solder at 260°C+5/-0°C for 5 sec.		More then 95% of total area of the pins should be covered with solder	

### 3.4 Mechanical Test

Items	Conditions	Specifications
Vibration	600-3300rpm amplitude 1.5mm 3 directions 2 H each	There shall be no damage.
Drop	On maple plate from 1 m high 3 times	
Lead pull	Pull with 1 kg force for 30 seconds	


Lead bend	90° bending with 500g weigh 2 times	

**3.5 Voltage Discharge Test**

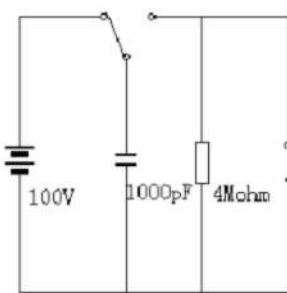Item	Condition	Specifications
Surge	Between any two electrode 	There shall be no damage

**3.6 Frequency response**

**Frequency response of picture channel:**

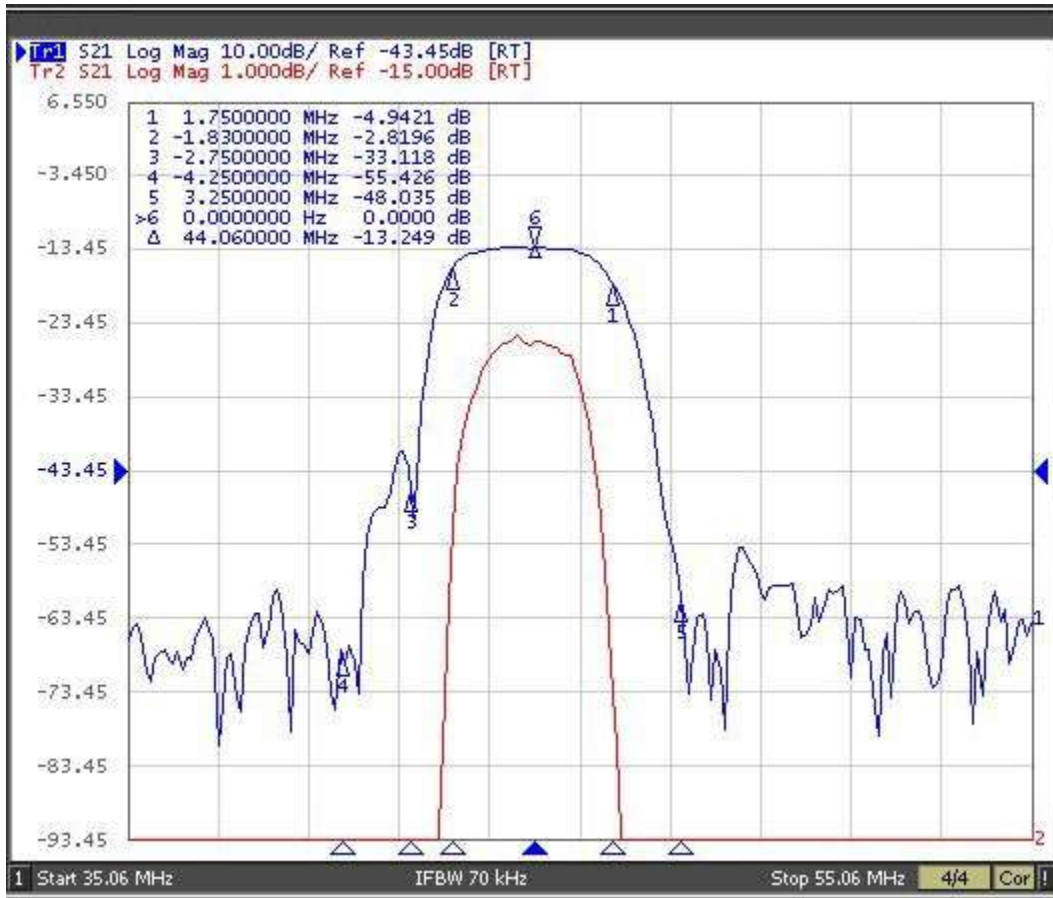



**Frequency response of sound channel:**

